

SUPER MULTI-TASKING TURNING CENTER

SMX 2100·2600·3100

SMX 2100/S/ST/B/SB/STB

SMX 2100L/LS/LST

SMX 2600/S/ST NEW Design

SMX 3100/S/ST/L/LS NEW Design

SMX 3100B/835



** The new designs featured in this catalog will be introduced step by step, with application schedules differing by product.*

SMX 2100·2600·3100

The SMX series - Our next generation multi-tasking turning centers are high-productivity, high-precision machines that are easy to operate. By integrating the functionalities and capabilities of multiple machines into one system, the SMX series provides users with a multi-tasking machine tool solution that significantly reduces machining time and machining operations. The SMX series also delivers excellent high-precision machining; accuracy is assured by minimizing thermal deformation through the use of thermal compensation sensors and systems. Ergonomic design focused on operator convenience, and on efficient and effective maintenance provides the optimal solution that meets every customer's needs.

CONTENTS

Product Overview

Basic Information

Detailed Information

Customer Support Service

04 Basic Structure

05 Machining Area

07 Cooling & Thermal
Compensation Concept

08 Spindle

09 Tailstock

10 Automatic Tool Changer

11 Additional Tool Magazine

12 Application Performance

14 Ergonomic Design

15 CUFOS

19 Fanuc 31i-B Plus

21 SINUMERIK ONE

22 Standard / Optional
Specifications

24 Peripheral Equipment

25 Power | Torque

30 External Dimensions

35 Tooling System

38 Working Range

47 Machine Specifications

50 Customer Support and
Services

51 Global Network



**HIGHER PRODUCTIVITY
THROUGH POWERFUL
MULTITASKING FUNCTIONS**



- Complex machining capabilities of the left spindle, right spindle, B-axis, milling spindle and lower
- Highly-rigid machine construction using structural analysis design
- Maximized Y-axis stroke through machine's orthogonal design structure
- Maximized productivity achieved through simultaneous machining

**ENHANCED PRECISION
THROUGH HIGH ACCURACY
CONTROL FUNCTIONS**



- Minimized thermal deformation of the spindle and feed axis using oil cooler system
- A doption of roller LM guideways with high-rigidity and high precision
- Equipped with 0.0001° B-axis and C-axis accuracy control functions

**EASY AND CONVENIENT
OPERATION THROUGH AN
ERGONOMIC DESIGN**



- Front located tool magazine
- Side-to-side movable swiveling Operation panel with adjustable Height (SMX 2100 : Swiveling & height adjustment possible)
- Convenient ATC-magazine operation panel




**The new designs featured in this catalog will be introduced step by step, with application schedules differing by product.*

BASIC STRUCTURE

All units are combined in an orthogonal direction to create a highly rigid structure that is intuitive and stable for users, and guarantees stable performance under any processing conditions.

Robust design


FEM (Finite Element Method) analysis results in superior machine stability. All guideways are sealed with a protective covers, preventing high temperature chips and coolant from contacting the guideways, thus maintaining unsurpassed long-term accuracy.

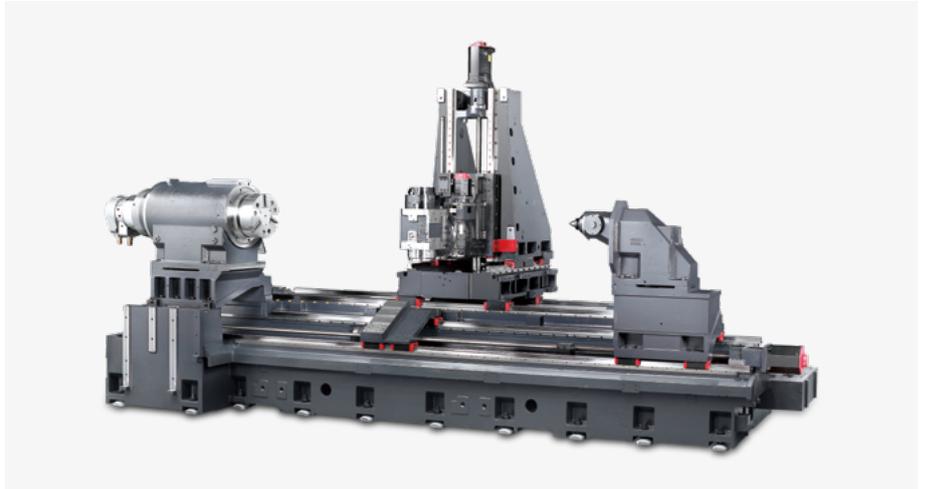

Feed axis

Extended axis travels and improved rapid rates improve machining capacity and deliver excellent productivity.

The X, Y and Z-axes move orthogonally to ensure high accuracy and repeatability.

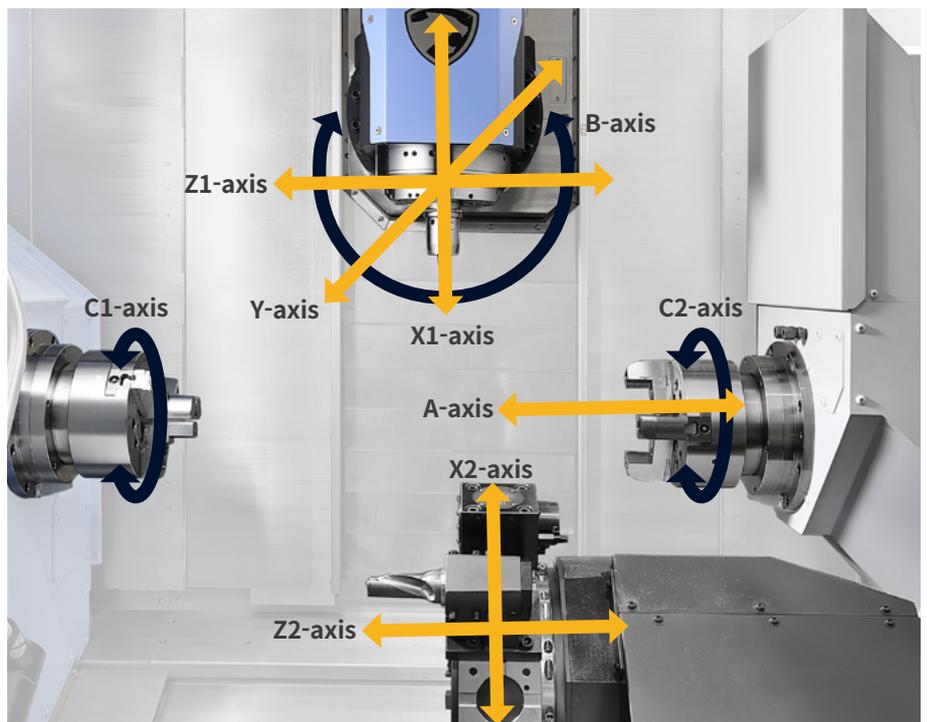


Unit : mm(inch)

Model	Travel					
	SMX 2100 /S/ST/B/ST/STB	SMX 2100L/LS/LST	SMX 2600/S, 3100/S	SMX 3100L/LS	SMX 2600ST/3100ST	SMX 3100B/835
X-axis	630 (-105/+525) (24.8 (-4.1/+20.7))		630 (-125/+505) (24.8 (-4.9/+19.9))		695 (-125/+570) (27.4(-4.9/+22.4))	696 (-46/+650) (27.4(-1.8/+25.6))
Y-axis	210(±105) (8.3 (±5.9))		300 (±150) (11.8 (±5.9))			300 (-200/+100)
Z-axis	1085 (42.7)	1585 (62.4)	1585 (62.4)	2585 (101.8)	1585 (62.4)	835 (32.9)
A-axis	1040 (40.9) ●	1597 (62.9) ●	1605 (63.2) ●	2500 (98.4) ●●	1540 (60.6) ●	-
B-axis	240 (±120) deg. (9.4(±4.7))					
X2-axis	220 (8.7) (model : ST)		-			235 (9.3)
Z2-axis	1047 (41.2) (model : ST)	1547 (60.9) (model : ST)	-			1540 (60.6)

① Right spindle ② Servo tail stock

High precision roller type LM guideways

High rigidity, high precision, highly qualified roller type LM guideway realizes fine precision and fast speed, minimizing non-cutting time and re-machining work.

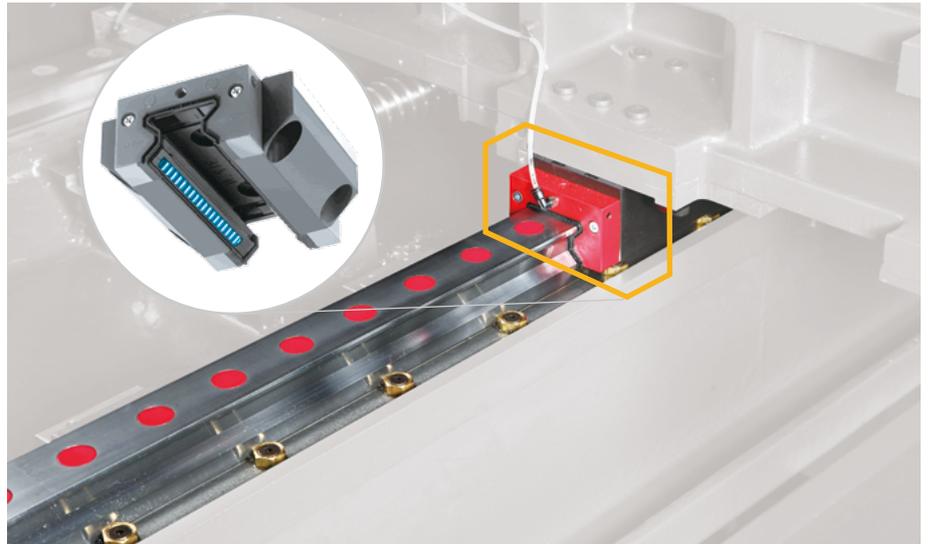

Unit : mm(inch)

Model	Rapid traverse rate					
	SMX 2100 /S/ST/B/ST/STB	SMX 2100L/LS/LST	SMX 2600/S, 3100/S	SMX 3100L/LS	SMX 2600ST/3100ST	SMX 3100B/835
X-axis	48 (1889.8)					
Y-axis	36 (1417.3)					
Z-axis		48 (1889.8)		30 (1181.1)	48 (1889.8)	
A-axis		30 (1181.1)		20 (787.4)	30 (1181.1)	-
B-axis	40 r/min					
X2-axis	24 (944.9)		-		24 (944.9)	-
Z2-axis	36 (1417.3)		-		36 (1417.3)	-

① Right spindle (Servo tail stock is not applicable)

MACHINING AREA

An increased machining area, as a result of the SMX machines' orthogonal structure, and an extended turning diameter capability, enables the machining of large workpieces.

Maximized X-axis, Y-axis machining area through orthogonal structure design

Wide X-axis, Y-axis enables machining of parts of various sizes/shapes, making machining programming and set-up easier.

X-axis machining area

SMX 2100/B, 2100L

630 mm
(24.8 inch)

SMX 2600/3100

630 mm
(24.8 inch)

SMX 2600ST/3100ST

695 mm
(27.4 inch)

SMX 3100B/835

696 mm
(27.4 inch)



Y-axis machining area

SMX 2100/B, 2100L

210 mm
(8.3 inch)

SMX 2600/3100
SMX 3100B/835

300 mm
(11.8 inch)

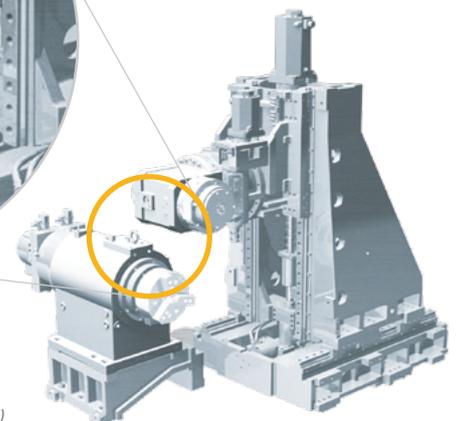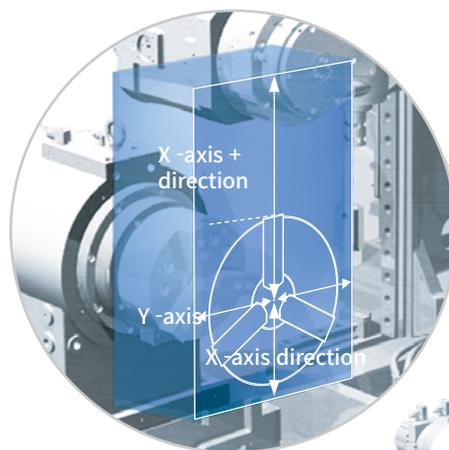

Yaxis : ±105mm(SMX 2100/B), ±150mm(SMX2600/3100), -200/+100(SMX 3100B⁸³⁵)
 Xaxis +direction : 525mm(SMX 2100/B), 505mm(SMX2600/3100),
 570mm(SMX2600ST/3100ST), 650mm(SMX 3100B⁸³⁵)
 Xaxis -direction : 105mm(SMX 2100/B), 125mm(SMX2600/3100), 46mm(SMX 3100B⁸³⁵)

MACHINING AREA

Extended machining area

Extended area enable various machining of large and long materials, and make it easy for users to access inside for set-up.

(A) Max. machining diameter

SMX 2100/2100L SMX 3100B/835
600 mm **760** mm
 (23.6 inch) (29.9 inch)

SMX 2600/3100
660 mm (26.0 inch)


(B) Max. machining length

SMX 2100/B
1040 mm (40.9 inch)

SMX 2100L, 2600/3100
1540 mm (60.6 inch)

SMX 3100L
2540 mm (100.0 inch)

SMX 3100B/835
790 mm (31.1 inch)

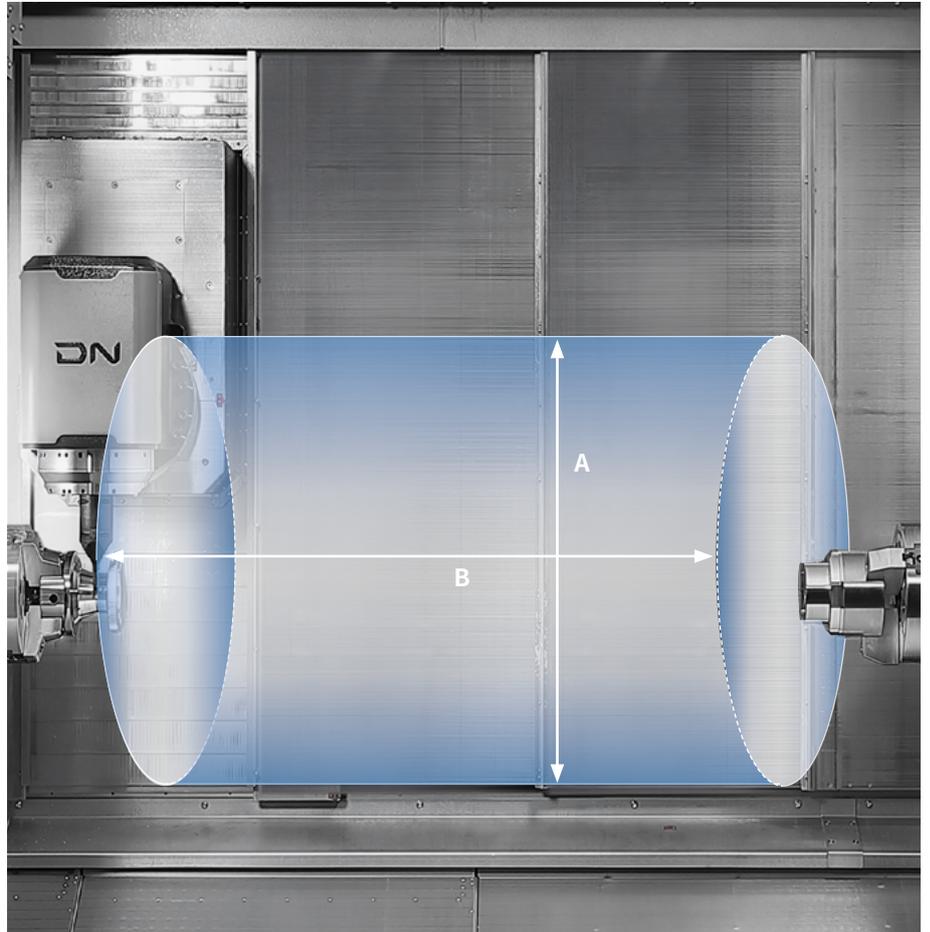


Large bar working diameter

SMX 2100 / L
65 mm (2.6 inch)

SMX 2100B / 2600
81 mm (3.2 inch)

SMX 3100, SMX 3100B/835
102 mm (4.0 inch)

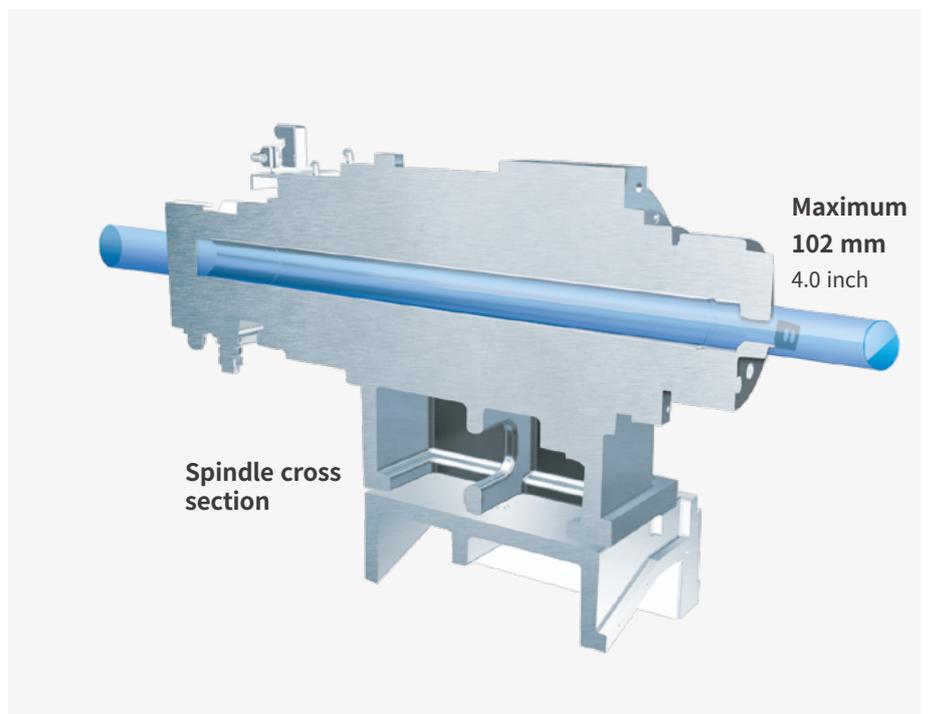

CUTTING PERFORMANCE

Powerful and fast machining capability across turning, milling, drilling, tapping and other multi-tasking operations ensures higher productivity and efficiency.

Powerful machining

Material : S45C

O.D. cutting (SMX 3100)

Spindle speed r/min	Cutting speed m/min (ipm)	Feedrate mm/rev	Radial cutting depth mm (inch)	Material removal rate cm ³ /min (inch ³ /min)
253	210 (8267.7)	0.55 (0.0)	8.5 (0.3)	1405 (85.7)

U-drill (milling)

Tool mm (inch)	Spindle speed r/min	Feedrate mm/min (ipm)	Material removal rate cm ³ /min (inch ³ /min)
Ø63 (2.5)	1010	131 (5.2)	409 (25.0)

Face milling


Tool mm (inch)	Milling spindle speed r/min	Radial cutting depth mm (inch)	Feedrate mm/min (ipm)	Material removal rate cm ³ /min (inch ³ /min)
Ø80	1100	5 (0.2)	1117 (44.0)	357 (21.8)

End milling

Tool mm (inch)	Milling spindle speed r/min	Radial cutting depth mm (inch)	Feedrate mm/min (ipm)	Material removal rate cm ³ /min (inch ³ /min)
Ø25	382	25 (1.0)	200 (7.9)	125 (7.6)

Tapping


Tool mm (inch)	Milling spindle speed r/min	Feedrate mm/min (ipm)
M30 x P3.5	212	742 (29.2)

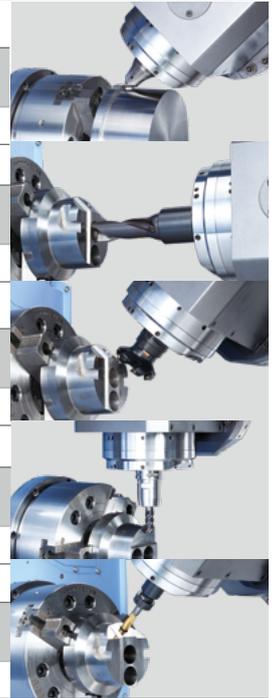

* The results above reflect internal test figures using the SMX 3100. Please refer to as examples only, as different cutting and environment conditions may give different results.

Higher productivity through multi-tasking operation


Faster machining times compared to working with many conventional machines provides superior productivity and machining capability.

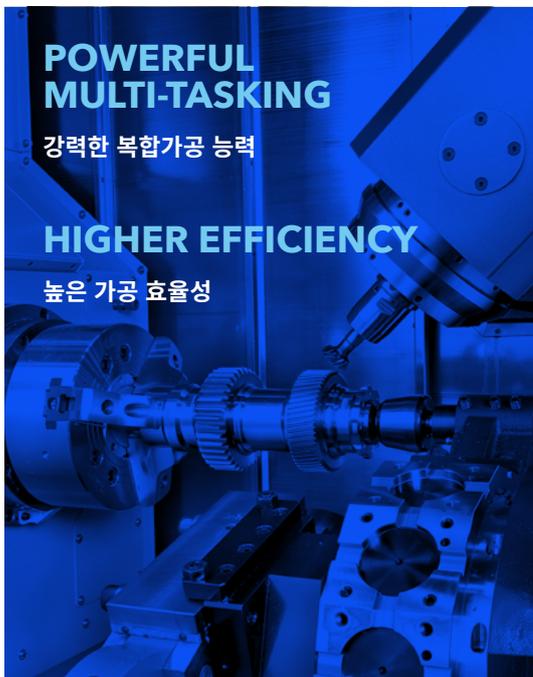

Reduced production lead time by

75 %


Conventional machining

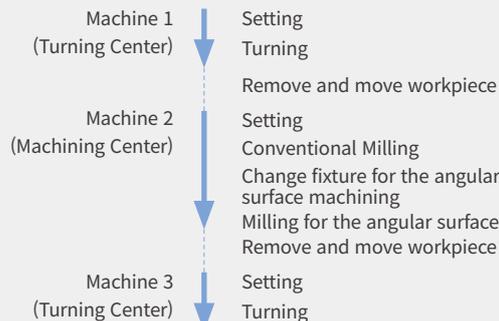

650 minutes



Multi-tasking of SMX



163 minutes


Increased work efficiency using one time setup on one machine

COOLING CONCEPT TO ACHIEVE HIGH ACCURACIES OVER LONG MACHINING RUNS

Machines have been designed and built to minimize thermal displacement and ensure superior accuracies over long machining runs and lengthy periods of operation.



Minimizing thermal deformation by oil cooling

A spindle and ballscrew core cooling system minimizes thermal deformation during long machining runs to achieve high-accuracy parts production.

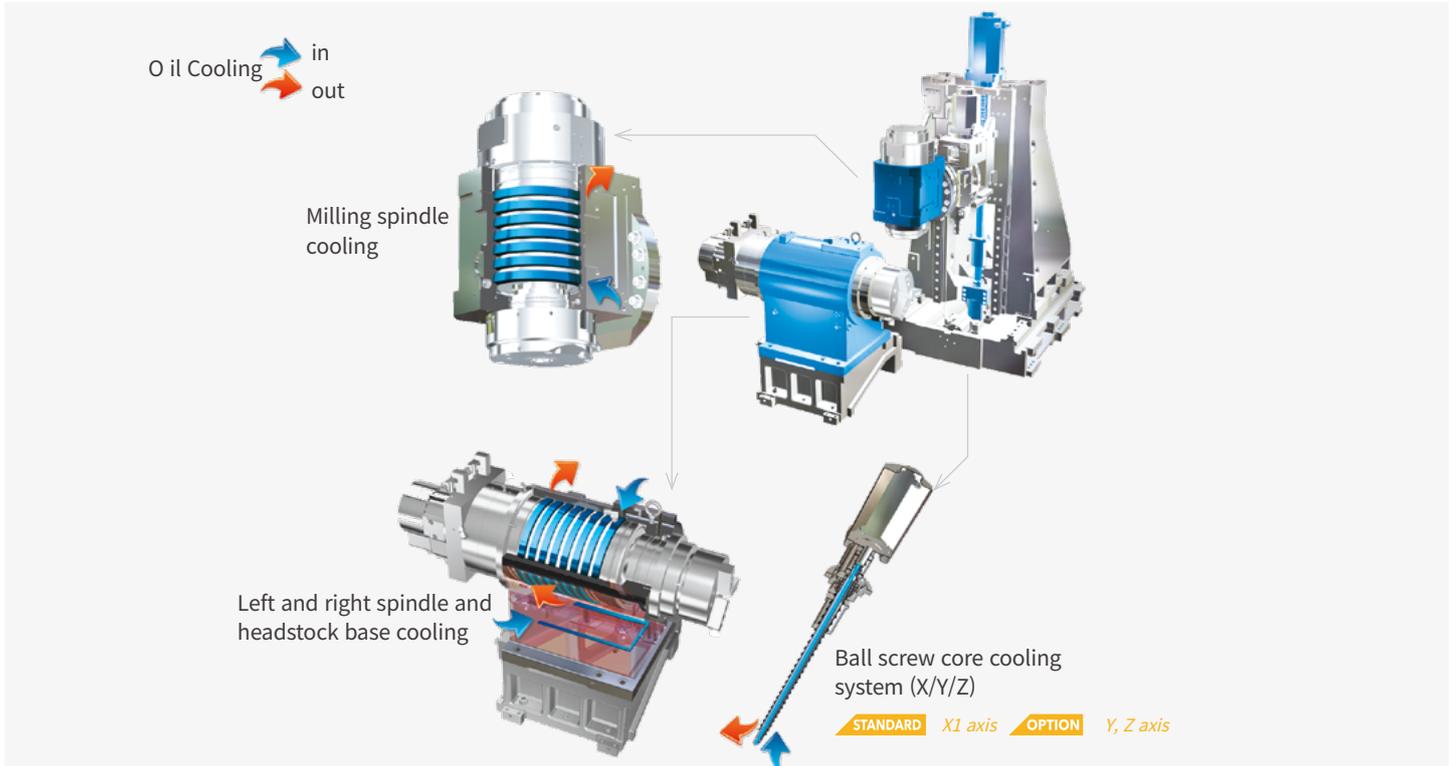

Circularity


By undertaking extensive testing of individual machine elements and analysing the results in detail, the SMX series achieves a high level of precision and reliability that exceeds customer expectations.

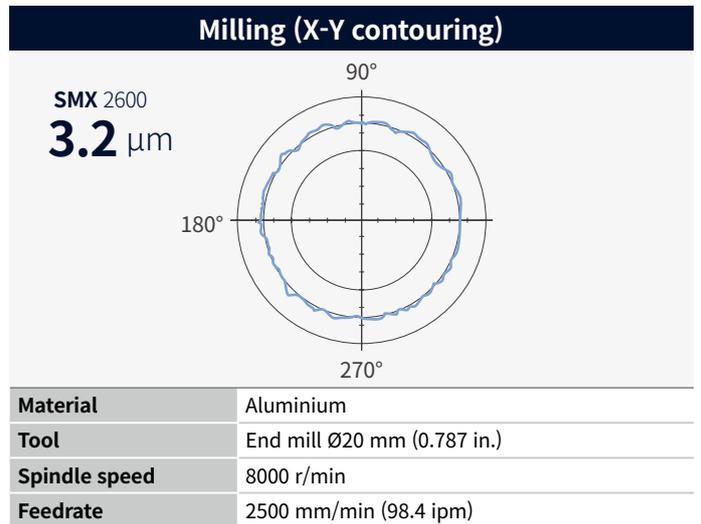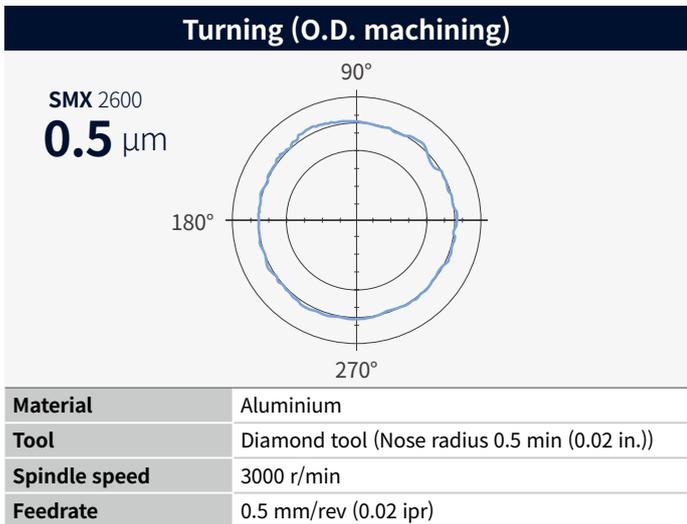

* This test is performed under DN Solutions Machine Tool's test environment.

SPINDLE

Perfect combination of three high-performance spindles to ensure machining stability operating under various cutting conditions.

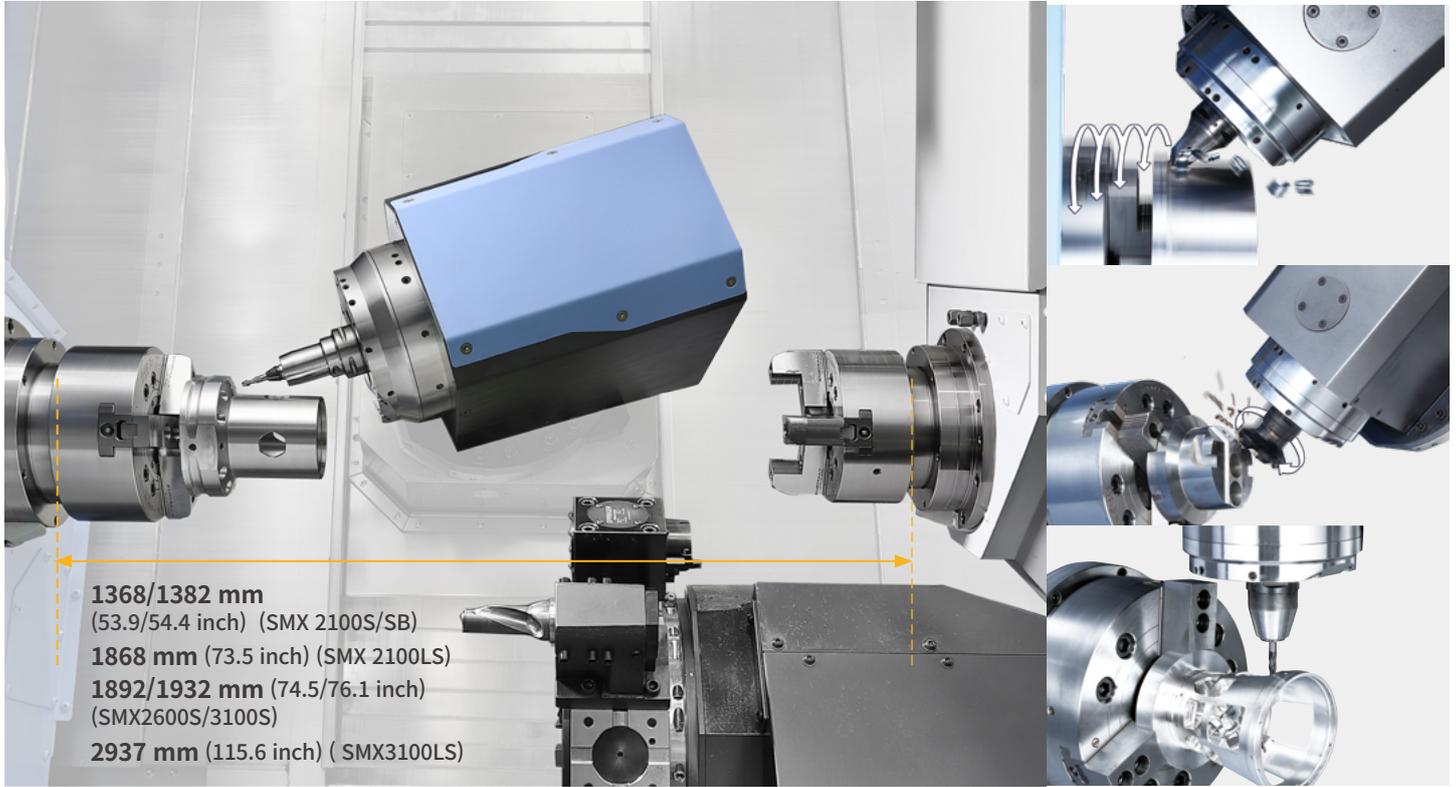

- 1368/1382 mm (53.9/54.4 inch) (SMX 2100S/SB)
- 1868 mm (73.5 inch) (SMX 2100LS)
- 1892/1932 mm (74.5/76.1 inch) (SMX2600S/3100S)
- 2937 mm (115.6 inch) (SMX3100LS)

Milling spindle

SMX 2100/L/B

12000 r/min, **22** kW (29.5Hp)
 {20000 r/min, 22 kW (29.5Hp) **OPTION**}

* 20000 r/min option : available only with FANUC 31i-B Plus, FANUC 31i-B5 Plus, CUFOS NC system

SMX 2600, 3100/L

12000 r/min, **26** kW (34.9 Hp)

Tool shank of milling spindle

CAPTO C6 {HSK-T63 **OPTION**}

Left spindle

SMX 2100/L SMX 2100B/ SMX 2600

8 inch **10** inch

SMX 3100, SMX 3100B/835

12 inch

Right spindle(S/ST)

SMX 2100/B, 2100L

8 inch

SMX 2600/3100

10 inch

Perfect combination of rotating spindles

Both left and right spindles are capable of high-accuracy C-axis operation and, with the milling spindle, can perform various machining functions like turning, milling and synchronized cutting in a single set up.

Model	Spindle	Standard Chuck inch	Spindle speed r/min	Power kW (Hp)	Torque N·m (ft·lbs)	Condition
SMX 2100 series	Left Spindle	8	5000	22/22/18.5/15 (29.5/29.5/24.8/20.1)	467 (344.6)	S3 15%/25%/30min/cont.
SMX 2100B series		10	4000	22/22/22/15 (29.5/29.5/29.5/20.1)	512 (377.9)	S3 15%/25%/15min/cont.
SMX 2600 series		10	4000	30/26/22 (40.2/34.9/29.5)	724 (516.6)	S3 25% / S2 30min / S1 Cont.
SMX 3100 series		12	3000	30/25 (40.2 / 33.5)	1203 (887.8)	30min/cont.
SMX 3100B/835		12	2400	30/25 (40.2 / 33.5)	1203 (887.8)	30min/cont.
SMX 2100 S/ST/SB/STB	Right Spindle	8	5000	22/18.5/15 (29.5/24.8/20.1)	467 (344.6)	S3 15%/30min/cont.
SMX 2600S/ST, 3100S/LS/ST		10	4000	30/26/22 (40.2/34.9/29.5)	724 (516.6)	S3 25% / S2 30min / S1 Cont.
Torque	Spindle	Standard Chuck inch	Spindle speed r/min	Power kW (Hp)	Torque N·m (ft·lbs)	Condition
SMX 2100/2100B series	Milling Spindle	CAPTO C6	12000	22/22/18.5/15 (29.5/29.5/24.8/20.1)	84.3 (62.2)	S3 15%/25%/30min/cont.
SMX2600,3100/L series, SMX3100B/835				26/18.5/15 (34.9 / 24.8 / 20.1)	124 (91.5)	2.5min/10min/cont.

High precision control of Left spindle axes (C & B-axis)

Machining operation is mainly done by the Left spindle and the Milling spindle. The C-axis of the left spindle and the B-axis of the milling spindle, with Y-axis control, facilitates multitasking operations i.e. drilling, tapping and end milling at any angle. It also enables the machining of precise angles and sculpted contours via 5-axis simultaneous machining.



B-axis 240° (± 120°) Large B-axis Stroke

Left spindle

0.0001°
 Note) C-axis of right spindle : 0.001°

C-axis positioning control
 To enhance C-axis positional accuracy of the left spindle, a positioning compensation sensor has been used. The left spindle can have C-axis positioning control every 0.0001° increment over 360°.


B-axis positioning control - precise continuous indexing
 High-accuracy B-axis indexing (every 0.0001° over ±120°) delivers outstanding positioning accuracy and enables a range of machining operations to be undertaken - from horizontal front face machining to angular machining.

Braking index at a random angle
 Within its ±120° range, the B-axis can be indexed and braked precisely at a random angle.

Swivelling and indexing of the B-axis is achieved by a servo motor and a roller gear cam operating with high-rigidity and high-precision.

TAILSTOCK

Easier and faster set-up of the tailstock using M-code programming (control servo motor and ballscrew).

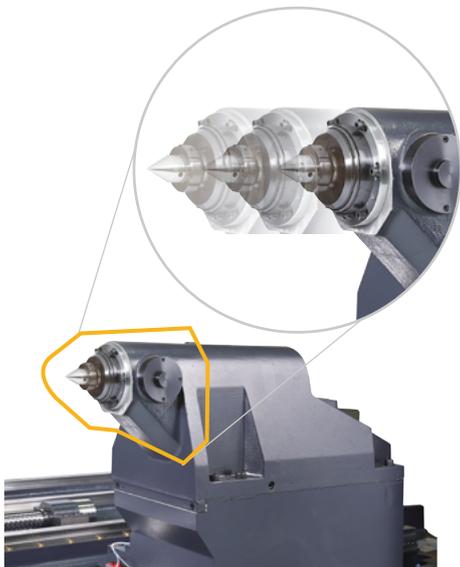

Servo-driven tailstock
 The servo-driven tailstock makes set-ups faster and easier to complete. The operator inputs the proper M-code information into the control and the tailstock moves to its correct position automatically, by linear motion control of the servo motor and ballscrew. No manual adjustments are required.

Model	Tail stock travel mm (inch)	Max. quill thrust force kN	Tail stock center
SMX 2100/B [L]	1075 (42.3) [1575 (62.0)]	7	Built-in type dead center, MT#4
SMX 2600/3100	1562 (61.5)	10	Built-in type dead center, MT#5
SMX 3100L	2500 (98.4)	15	

* SMX 3100B/835 : without tailstock

AUTOMATIC TOOL CHANGER

The servo-driven ATC and servo tool magazine ensures fast and reliable tool indexing.

Tool storage

40 {80/120 **OPTION**} tools

Max. tool length (from gauge line)

SMX 2100/B, / 3100B/835

300 mm
(11.8 inch)

SMX 2100L

400 mm
(15.7 inch)

SMX 2600 / 3100

450 mm
(17.7 inch)

Max. tool weight

12 kg
(26.5 lb)

Max. tool moment

9.8 N·m
(7.2 ft-lbs)

Max. tool diameter (continuous)

90 mm
(3.5 inch)

Max. tool diameter (adjacent pots are empty)


130 mm
(5.1 inch)

Enlarged touchscreen panel is available as an option

7 {10.4 **OPTION**} inch

Servo-driven ATC and tool magazine

The tool magazine capacity can be increased to 120 tools. Tools are selected by the fixed address method that helps reduce changeover times.

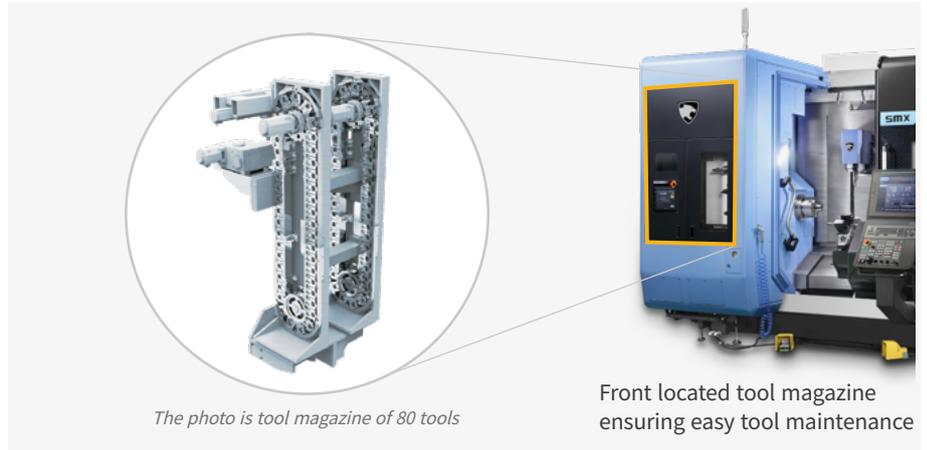

ATC operation panel

The status of the ATC and the tool magazine can be viewed on a separate touchscreen. The touchscreen is used to operate the ATC, the tool magazine and the tool pot carrier.



ADDITIONAL TOOL MAGAZINE

As an option, just for SMX 3100L/LS, a long tool magazine is available for machining long parts (i.e. tubes, valves etc.).

LONG TOOL Max. tool size

Ø60 x L600 mm
(Ø 2.4 x L 23.6 inch)

Max. weight

15 kg
(33.1 lb)

GUN DRILL Max. tool size

Ø30 x L800 mm
(Ø 1.2 x L 31.5 inch)

Tool storage

3 tools^①

^① Customers can select a tool storage capacity of 2+1 tools instead of 3 tools. The 2+1 storage means 2 tools of Ø60 x L600 mm or Ø30 x L800 mm and 1 large diameter tool, Ø190 x L200 mm, can be mounted in the long tool magazine.

Number of tool stations

SMX 2100ST/LST/STB **OPTION**

12 ea, **24** st. Indexing

SMX 2600ST/3100ST

12 ea

Tool holder type **OPTION**

SMX 2100ST/LST/STB

BMT 55P

SMX 2600ST/3100ST

BMT 65P

Max. rotary tool speed **OPTION**

5000 r/min

10000 r/min

*10000 r/min : available on only
SMX 2100ST/STB/LST(FANUC NC)

Various applications for the lower turret **OPTION**

- Case1) Steady rest on lower turret
- Case2) Tailstock on lower turret application for long part machining

Tool magazine for long tool **OPTION** SMX 3100L / LS

SMX 3100L/LS can be equipped with a long tool magazine as an option.


SMX 3100L/LS can accommodate workpieces up to 2540mm between centers. The machine can process long tubes such as landing gear axles requiring a center bore. Because the automatic Tool changer on this model cannot handle a long tool, the separate tool magazine, just for these tools, has 3 tool stations for tools up to 600mm.



Rigid servo-driven lower turret

(SMX 2100ST/LST/STB, SMX 2600ST/3100ST)

Turret rotation, acceleration/ deceleration and the large diameter curvic coupling are all controlled by a high-torque servo-motor. Unclamping and rotation are virtually simultaneous. Fast indexing helps keeps cycle times short.

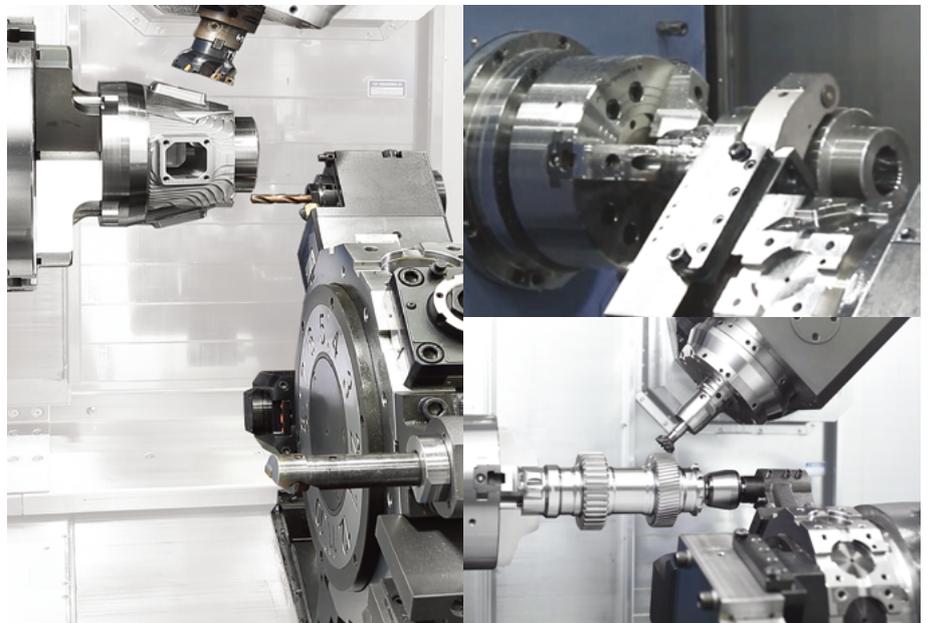


APPLICATION PERFORMANCE

Multi-tasking, which is performing more than one duty at a time, can deliver up to a 40% increase in productivity and can have a positive impact on your company's bottom line.

Benefits of multi-tasking

Using a single set up, one machine is capable of performing all machining processes that generally require two, three or even more machines to complete. By minimizing time and labor, the process cost is reduced and lead times are shortened by up to 75%. This provides a significant advantage when undertaking high mix : low volume manufacturing.

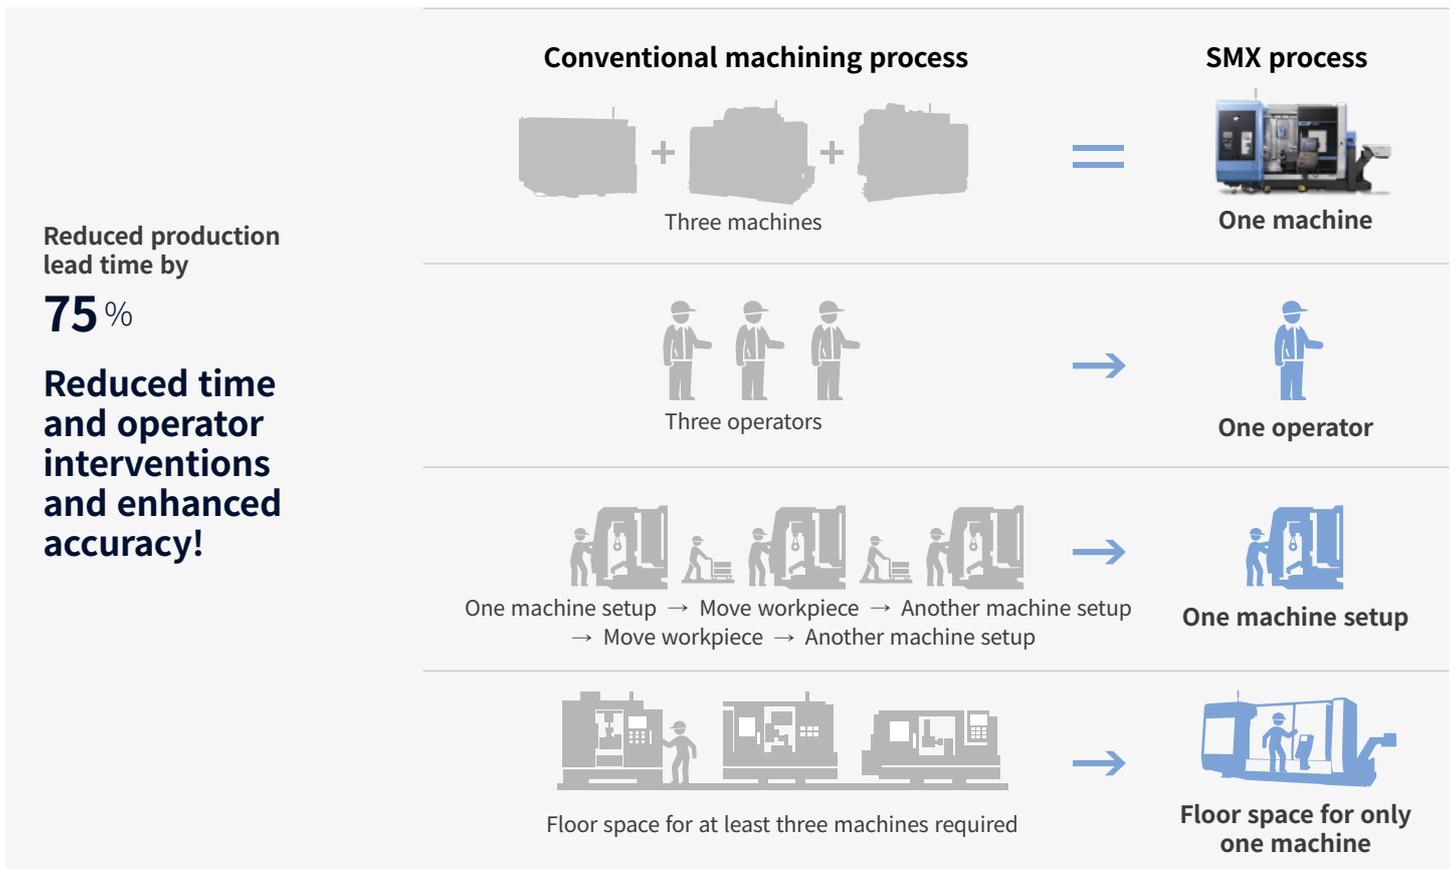

Providing complex 5-axis machining capabilities (Standard with FANUC 31i-B5 Plus control)

Simultaneous 5-axis machining functions such as TCP* are built-in, making the machining of complex shapes (i.e. automotive engine impellers or aero-engine blades), much easier and faster to produce.

Smooth tool center point control

- Facilitating the high precision machining of a surface by automatic control of the tool path
- Reducing the time required for setups and for completion of the machining process


* TCP : Tool center point

Cutting point command OPTION

- Increasing productivity by automatically making all necessary compensations when using various tool tips without having to change the machining program
- Performing effective tool correction

Various applications

Just one machine! The SMX series can satisfy all your machining requirements. Investing in SMX machine seriously boosts your production capabilities and dramatically improves your performance.

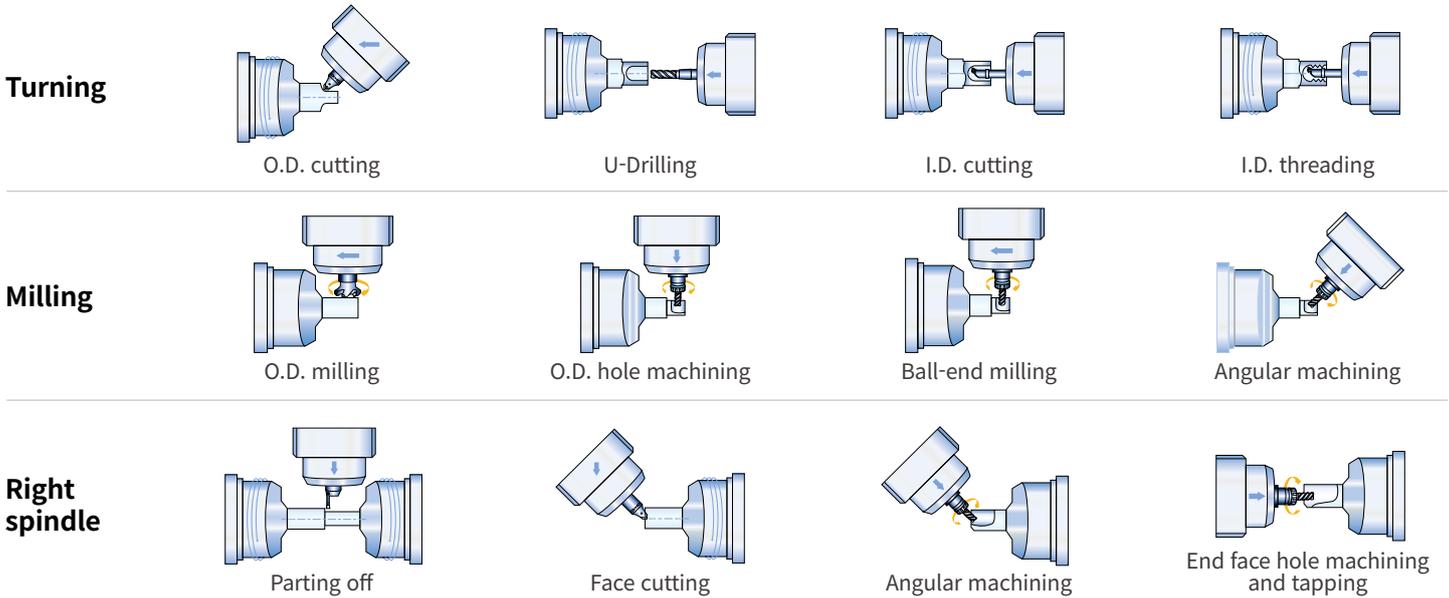

Typical applications - 1

A wide range of applications requiring high-performance machining

The sophisticated machining capabilities of SMX machines enable a wide range of applications, across various industries, to be machined to high precision. Specific industries include -: aerospace, energy, shipbuilding, medical, etc.

			
Drill bit Industry Energy Size D165 X D175 Material Stainless steel Tools 15	Shaft Industry Energy Size D150 X L350 Material Aluminum Tools 14	Die roller Industry Medical Size D185 X L330 Material Aluminum Tools 9	Valve Industry General Size D300 X L450 Material Stainless steel Tools 6

Typical applications - 2

A wide range of applications requiring high-precision machining

Stable control technology and excellent levels of accuracy enable delicate and detailed workpieces to be machined to high precision.

			
Housing Industry General Size D150 X L300 Material Aluminum Tools 6	Impeller Industry Aerospace Size D120 X L80 Material Aluminum Tools 6	Barrel Industry Electronics Size D70 X L50 Material Aluminum Tools 50	Bucket Blade Industry Energy Size 85t x D120 x L600 Material Stainless steel Tools 8

ERGONOMIC DESIGN

Ease-of-use and operator convenience - all part of the machines' ergonomic design.

Ease of machine setup

By laying out the operation panel and tool magazine in a user-friendly way, tooling and workpiece setup becomes more efficient.

Award



1 Operation panel with side-to-side movement, swivel action and adjustable height setting

Model	Swivel angle adjustment	Height adjustment	Left/Right movement
SMX 2100/2100B	0~100°	0~150mm (0~5.9inch)	panel stand rotating (50°)
SMX 2600/3100	0~100°	0~190mm (0~7.5inch)	1350mm (53.1inch)



2 Convenient front located tool magazine layout, ATC operation panel


Easy tool loading, managing and monitoring with touch screen.

3 Low-height bed cover structure for easy internal access

Fast and convenient setup and maintenance through improved ergonomic accessibility.

4 Extended front window


Enables the operator to easily monitor the machining process.

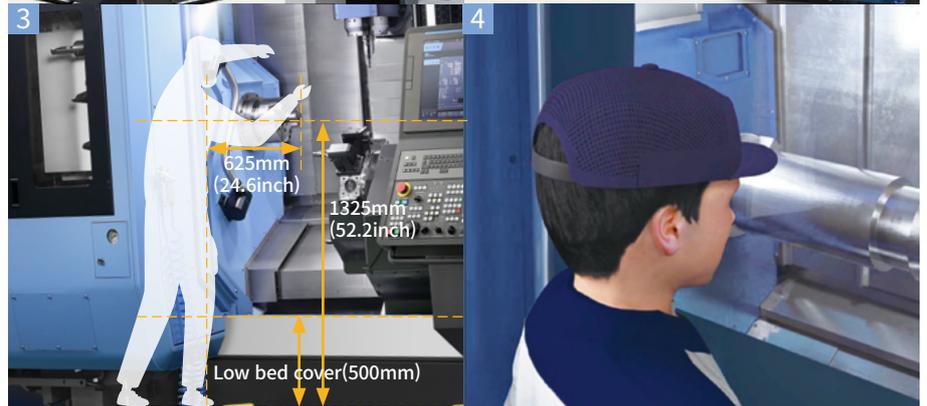

Safety design to reduce collision-caused damage

Machine airbag function

The machine airbag minimizes damage in the event of a machine collision. Sudden changes in axis loads etc., are detected and will trigger the airbag's deployment.

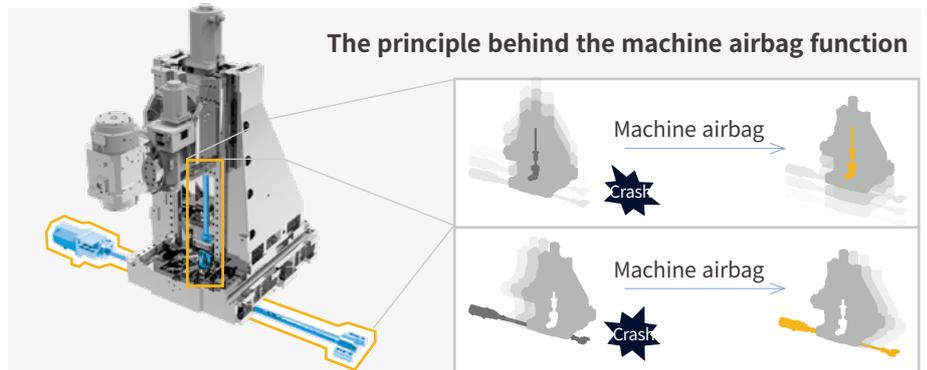

CUSTOMIZED USER-FRIENDLY FLEXIBLE OPERATION SOLUTIONS

CUFOS is a PC based control system created by DN Solutions. equipped with intuitive user-friendly functions such as a smart phone screen and easy customization, CUFOS helps to improve operational efficiency and performance for the user.

FEATURES

19 inch TOUCHSCREEN

- Program memory : 40GB
- App-based Interface like smart phone, tablet PC

EASY PROGRAMMING

- Sketch cycle : Gear skiving, Gear hobbing, Polygon turning (continuously being added...)
- SSD data server : Program file sharing/ managing (CF card/USB/ External PC)

EASY SET-UP/OPERATION

- Tool management for SMX
- CPS(collision protection system)
- Manual viewer
- File manager & PDF viewer

EASY MAINTENANCE

- Status monitor
- Alarm guidance
- Maintenance manager

CUFOS

for SMX ser.



SKETCH CYCLE

Easy and quick, but powerful programming for complex machining

Sketch cycle is easy-to-use conversational programming software that make a support to code complex shapes and machining processes such as gear skiving, hobbing and polygon turning.



Advantages

- Easy to use even for beginners with conversational programming by advising workpiece shapes, tool information and machining conditions
- Expensive CAM software is not required
- Reduce coding time by up to 70% while minimizing trial and errors
- Enable to utilize the recent high productivity processing program such as gear skiving




Gear skiving

Gear skiving is carried out in 5 axis machines for more flexible and productive gear machining. The complete component can be finished in one machine, which shorten production time and reduce handling and logistics cost.

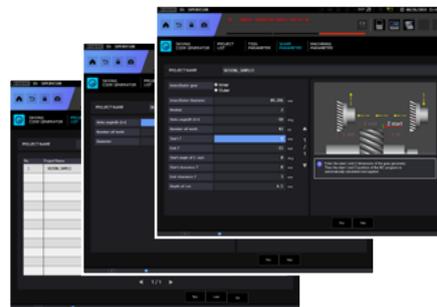


Gear hobbing

Gear hobbing make it easy to proceed gear machining with general turning centers. Gear machining programs can be created by the simple conversational programming so program coding and set-up time can be saved dramatically.

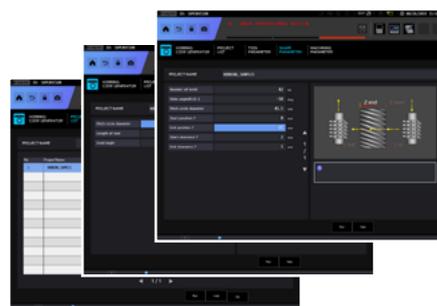

Polygon turning

Polygon turning is a machining process which allows noncircular forms (polygons) to be machine turned without interrupting the rotation of workpieces. It allows rapid production and clean machining of advanced geometries.

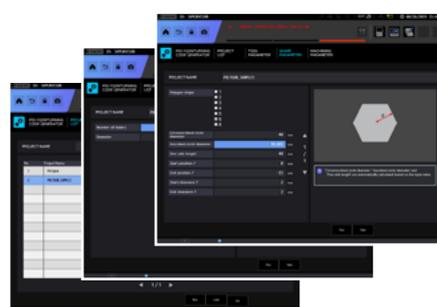

EASY SET-UP | OPERATION

Tool management, collision protection between machine unit/ workpiece/tooling and various user guidance provide higher productivity and user-convenience.



Tool management

DN Solutions EZ work tool management




Includes a summary monitoring screen and gives the operator easy access to DN Solutions's own tool management system which provides comprehensive real time data on each tool, such as remaining tool life and status of tool groups.




CPS (Collision protection system)

A function to prevent real-time collision between the tool and equipment / machine elements inside the working area.

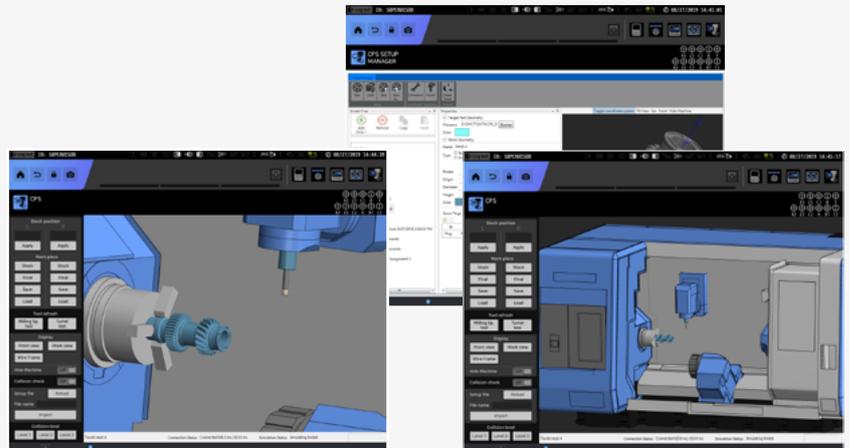

Use the setup manager with the CPS app to build up the machine model, and add tool, workpiece and workholding equipment details.



File Manager & PDF viewer

Ability to transfer various type of files including CF cards, USB memory, external PCs and memory inside CUFOS, NC programs between NC memory. PDF drawings can be directly open on the screen via PDF viewer




EASY MAINTENANCE

Keeping a machine in best condition through status monitoring, alarm guidance and maintenance manager functions.





Status monitoring

Monitoring various information such as spindle, milling spindle, feed axis, cycle time, program/tool no. on one screen.



Alarm guidance

Presenting an operator alarm's causes and troubleshooting guides and sending an email when the alarm last for a long time.

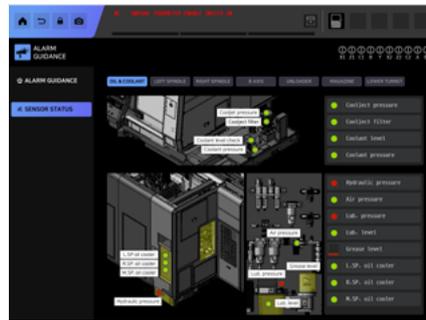

Maintenance manager

Monitors the status of machine and control elements, and confirms the alarm condition and maintenance schedule for preventative maintenance.



CUFOS: STANDARD | OPTIONAL SPECS

A diverse range of functions and apps are available to meet your needs.

Description	Features	SMX series	
Hardware	Display Unit	19" Color LCD Screen	●
	Main RAM Memory	8GB	●
	Program Storage Memory	SSD 256GB	●
	2 point-touch panel port		●
	Windows 7 operating system		●
Applications	DN Solutions Tool Management		○
	CPS(Collision Protection System)		●
	SSD Data server application (40GB)		●
	Set and Inspection Application(Renishaw)		○
	Manager's Message Notification application		●
	FTP Server service		●
	Smart key access control application		○
	Memo Application		●
	Machine status Monitor application		●
	Alarm guidance application		●
Sketch Cycle		○	
Alarm Notification via email		●	
iHMI Basic Application	Manual viewer application		●
	Calendar application		●
	Browser application		●
	Periodic Maintenance Application		●
	Data Logger application		●
	Servo viewer application		●

FANUC 31i-B PLUS

FANUC 31i-B Plus maximizes customer productivity and convenience.

15" Touch screen + New OP

DN Solutions Fanuc 31iB/B5 Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout. It features a Qwerty keyboard for fast and easy data input and operation.

FANUC 31i-B Plus

- 15-inch color display
- Intuitive and user-friendly design

USB and PCMCIA card QWERTY keyboard

- EZ-Guide i standard
- Ergonomic operator panel
- 4MB Memory
- Hot keys
- Enhance AICC BLOCK
- Touch pen provided as standard



iHMI touchscreen

iHMI provides an intuitive interface that uses a touchscreen for quick and easy operation.

Range of applications

Providing various applications related to planning, machining, improvement and utility, for customer convenience.



NUMERIC CONTROL SPECIFICATIONS

FANUC

Description	Item	Specifications	SMX2100(L), SMX 2600, 3100(L)	SMX2100(L) S, SMX 2600S, 3100(L)S	SMX2100(L)ST, SMX 2600ST, 3100ST	SMX2100(L), SMX 2600, 3100(L)	SMX2100(L)S, SMX 2600S, 3100(L)S	SMX2100(L)ST, SMX 2600ST, 3100ST
			FANUC 31i-B Plus	FANUC 31i-B Plus	FANUC 31i-B Plus	FANUC 31i-B5 Plus	FANUC 31i-B5 Plus	FANUC 31i-B5 Plus
Controlled axis	Controlled axes	Note *1) {Z2} could be supplied as Servo Steady Rest option except for T/ST type.	7 (X, Z, C, B, Y, A, {Z2})	8 (X, Z, C1, B, Y, C2, A, {Z2})	9 (X1, Z1, C1, B, Y, X2, Z2, C2, A)	7 (X, Z, C, B, Y, A, {Z2})	8 (X, Z, C1, B, Y, C2, A, {Z2})	9 (X1, Z1, C1, B, Y, X2, Z2, C2, A)
	Simultaneously controlled axes		4 axes(Upper X, Z, C, Y) + 1 axes(Lower {Z2})	4 axes(Upper X, Z, C1, Y) + 3 axes(Lower {Z2}, C2, A)	4 axes(Upper X1, Z1, C1, Y) + 4 axes(Lower X2, Z2, C2, A)	5 axes(Upper X, Z, C, B, Y) + 1 axes(Lower {Z2})	5 axes(Upper X, Z, C1, B, Y) + 3 axes(Lower {Z2}, C2, A)	5 axes(Upper X1, Z1, C1, B, Y) + 4 axes(Lower X2, Z2, C2, A)
Data input/output	Fast data server		○	○	○	○	○	○
	Memory card input/output		●	●	●	●	●	●
	USB memory input/output		●	●	●	●	●	●
	Larger capacity memory_2GB	not CUFOS only (15" display)	○	○	○	○	○	○
Interface function	SSD data server	CUFOS only (19" display)	○	○	○	○	○	○
	Embedded Ethernet		●	●	●	●	●	●
	Fast Ethernet		○	○	○	○	○	○
Operation	Enhanced Embedded Ethernet function		●	●	●	●	●	●
	DNC operation	Included in RS232C interface.	●	●	●	●	●	●
	DNC operation with memory card	G5.1 Q_, 600 Blocks	●	●	●	●	●	●
Feed function	AI contour control II		●	●	●	●	●	●
	AI contour control II	G5.1 Q_, 1000 Blocks	●	●	●	●	●	●
	High-speed smooth TCP		X	X	X	●	●	●
Operation Guidance Function	EZ Guide i (Conversational Programming Solution)		●	●	●	●	●	●
	iHMI with Machining Cycle		●	●	●	●	●	●
	EZ Operation package		●	●	●	●	●	●
Setting and display	CNC screen dual display function		●	●	●	●	●	●
Network	FANUC MTCConnect		⊕	⊕	⊕	⊕	⊕	⊕
	FANUC OPC UA		⊕	⊕	⊕	⊕	⊕	⊕
Others	Display unit (Note *2)	15" color LCD with Touch Panel	⊕	⊕	⊕	⊕	⊕	⊕
		19" color LCD with Touch Panel	⊕	⊕	⊕	⊕	⊕	⊕
	Part program storage size & Number of registerable programs	1280M(512KB)_1000 programs	X	X	X	X	X	X
		2560M(1MB)_1000 programs	X	X	X	X	X	X
		5120M(2MB)_1000 programs	X	X	X	X	X	X
		10240M(4MB)_1000 programs	●	●	●	●	●	●
		20480M(8MB)_1000 programs	○	○	○	○	○	○
		10240M(4MB)_4000 programs	○	○	○	○	○	○
20480M(8MB)_4000 programs	○	○	○	○	○	○		

CONVENIENT OPERATION

FANUC 31i-B Plus

EZ WORK function

Tool load monitoring, Setup guide, Status monitoring, Operation and Recovery guide can provide more convenience and efficiency increasing for user operation.




Tool load monitoring

Real-time tool load monitoring and display various tooling information.



Operation and Recovery guide

Provides step-by-step operation guides and help so even unskilled users can operate it safely and easily.

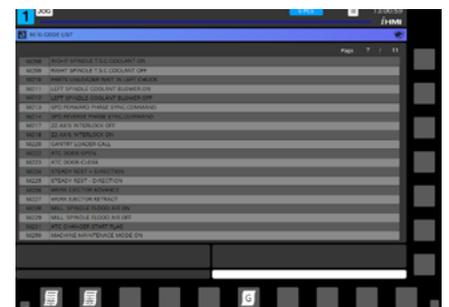

Thermal Compensation

Improve the machining precision through temperature sensor detection and deflection compensation of the structure in real-time.




Status monitoring

Real-time confirmation of machine operation abnormality for effective maintenance using actuator/sensor base operation status notifications.



Setup guide

Displays the operation status up to now and guides the next step when setting up the machine.

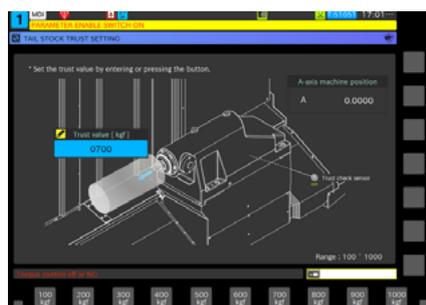

CONVENIENT OPERATION

SINUMERIK ONE

21.5 inch display + New OP

Two path programs are displayed simultaneously in the large 21.5-inch screen for enhanced user convenience.


- 21.5-inch display
- 6GB user memory
- USB (standard)
- QWERTY keyboard




Convenient conversational functionality



Shopmill / Shopturn



Tool load monitoring




Measuring cycle



Intelligent kinematic compensation function



Temperature compensation function



Collision avoidance function

NUMERIC CONTROL SPECIFICATIONS

SIEMENS

Description	Item	Specifications	STD	S	ST
			S840D	S840D	S840D
Controlled axis	Controlled axes		X1, Z1, Y1, B1, C1, C3, W1, MG1, MG2, ARM,SH	X1, Z1, Z3, Y1, B1, C1, C2, C3, W1, MG1, MG2, ARM,SH	X1, X2, Z1, Z2, Z3, Y1, B1, C1, C2, C3, C4, MG1, MG2, MG3, ARM,SH
	Simultaneously controlled axes		5 axes	5 axes	5 axes
Data input/output	Memory card input/output		X	X	X
	USB memory input/output		●	●	●
Interface function	Ethernet	(X130)	●	●	●
	On network drive	(without EES option, Extcall)	●	●	●
Operation	On USB storage medium, e.g. memory stick	(without EES option, Extcall)	●	●	●
	Workpiece coordinate system	G54 - G59, G507 - G599	●	●	●
Feed function	Advanced surface		●	●	●
	Top surface		○	○	○
Programming & editing function	Look ahead number of block		1000	1000	1000
	3D simulation, finished part		●	●	●
	Simultaneous recording		●	●	●
Operation guidance function	DXF reader for pC integrated in SINUMERIK operate		○	○	○
	Shopturn		●	●	●
	EZ operation package		●	●	●
Setting and display	Operation via a VNC viewer		●	●	●
	Network		●	●	●
Others	MTConnect		⊕	⊕	⊕
	OPCUA		○	○	○
	Display unit	19" color display without touch screen(SW4.9)	X	X	X
		21.5" color display with touch screen(SW4.9)	●	●	●
		CNC user memory 10 MB	●	●	●
		CNC user memory 100 MB	○	○	○
		CNC user memory 6GB	○	○	○
	Part program storage size	CNC user memory 40GB (with PCU or IPC)	○	○	○
		CNC user memory without limit (Execution from external storage devices) (EES / Using by USB or network)	○	○	○
		HMI user memory for CNC part program 6GB	●	●	●

STANDARD | OPTIONAL SPECIFICATIONS

A range of options is available to suit individual requirements.

Description	Specifications	SMX 2100/L	SMX 2100S/LS	SMX 2100ST/LST	SMX 2100B	SMX 2100SB	SMX 2100STB	
Tool shank	CAPTO C6	●	●	●	●	●	●	
	HSK-A63	○	○	○	○	○	○	
	Automatic tool changer	●	●	●	●	●	●	
Automatic tool changer	7" operation touch panel	○	○	○	○	○	○	
	10.4" operation touch panel (including a camera in the magazine)	○	○	○	○	○	○	
	40 tools	●	●	●	●	●	●	
Tool magazine	80 tools	○	○	○	○	○	○	
	120 tools	○	○	○	○	○	○	
	Milling Spindle	●	●	●	●	●	●	
Low turret	12000 r/min	○	○	○	○	○	○	
	20000 r/min (Fanuc only)	○	○	○	○	○	○	
	12 stations turning	X	X	●	X	X	●	
	12 stations turn-milling (BMT55P, 5000 r/min)	X	X	○	X	X	○	
	12 stations turn-milling (BMT55P, 10000 r/min(Fanuc only))	X	X	○	X	X	○	
	12 stations /24 Positioning turn-milling (BMT55P, 5000 r/min)	X	X	○	X	X	○	
Work holding device	12 stations/24 Positioning turn-milling(BMT55P, 10000 r/min(Fanuc only))	X	X	○	X	X	○	
	Left spindle	Hydraulic chuck 8"	●	●	●	X	X	X
		Hydraulic chuck 10"	○	○	○	●	●	●
		Hydraulic chuck 12"	X	X	X	○	○	○
	Right spindle	Hydraulic chuck 8"	X	●	●	X	●	●
		Hydraulic chuck 10"	X	○	○	X	○	○
		Dual pressure chucking (High pressure / Low pressure)	○	○	○	○	○	○
	Servo driven steady rest (Z-movement)	Chuck clamp & Unclamp confirmation	○	●	●	●	●	●
		SLU-3 (Ø14 ~ Ø152)	X	X	○	X	X	○
		SLU-3.1 (Ø20 ~ Ø165)	○	○	○	○	○	○
		SLU-3.2 (Ø50 ~ Ø200)	○	○	X	○	○	X
		SLU-4 (Ø30 ~ Ø245)	○	○	X	○	○	X
		SLU-5 (Ø45 ~ Ø310)	○	○	X	○	○	X
		STA-3 (Ø12 ~ Ø152)	X	X	○	X	X	○
		STA-3.1 (Ø20 ~ Ø165)	○	○	○	○	○	○
STA-3.2 (Ø50 ~ Ø220)		○	○	X	○	○	X	
STA-4 (Ø35 ~ Ø245)		○	○	X	○	○	X	
STA-5 (Ø45 ~ Ø310)		○	○	X	○	○	X	
Coolant		T-T-C (Milling spindle)	●	●	●	●	●	●
	Pressure 1.0MPa (145 psi)/ Element filter	○	○	○	○	○	○	
	Pressure 3.0MPa (435 psi)/ Cyclone filter	○	○	○	○	○	○	
	Pressure 7.0MPa (1015 psi) / Cyclone filter	○	○	○	○	○	○	
	Pressure 7.0MPa (1015 psi)/Paper filter	○	○	○	○	○	○	
	MQL (Minimum quantity lubrication) system	○	○	○	○	○	○	
	For Lower turret	X	X	●	X	X	●	
	Pressure 0.45MPa (65.2psi) / Tank screen filter	○	○	○	○	○	○	
	Pressure 0.7 / 1.0 / 1.45 Mpa(101.5/145/151.1 psi)/ Tank screen filter	X	X	○	X	X	○	
	Oil skimmer	○	○	○	○	○	○	
Chip disposal	Coolant pressure switch (Standard for milling spindle / option for lower turret)	●	●	● (lower turret : ○)	●	●	● (lower turret : ○)	
	Lower turret coolant filter	X	X	○	X	X	○	
	Coolant level switch : Sensing level - Low	○	○	○	○	○	○	
	Chip conveyor (Right disposal)	○	○	○	○	○	○	
	Chip bucket	○	○	○	○	○	○	
	Air blower (for Left or Right spindle chuck)	●	●	●	●	●	●	
	Chuck coolant (for Leftor Right spindle chuck)	○	○	○	○	○	○	
	Through spindle air shower (Left or Right)	○	○	○	○	○	○	
	Through spindle coolant (Left or Right)	○	○	○	○	○	○	
	Shower coolant (0.75kW, 85 liter/min)	○	○	○	○	○	○	
High accuracy	Coolant gun	○	○	○	○	○	○	
	Air gun	○	○	○	○	○	○	
	Mist collector	○	○	○	○	○	○	
	Thermal compensation	●	●	●	●	●	●	
	Ball screw core cooling (X-axis)	●	●	●	●	●	●	
	Ball screw core cooling (Y/Z-axis)	○	○	○	○	○	○	
	Water soluble Coolant Chiller**	○	○	○	○	○	○	
	Linear scale (X1-axis)	○	○	○	○	○	○	
Measurement	Linear scale (X2-axis)	X	X	○	X	X	○	
	Linear scale (Y / Z-axis)	○	○	○	○	○	○	
	Oil cooler cooling flow detector	○	○	○	○	○	○	
	Auto tool setter(Milling spindle,Touch)	○	○	○	○	○	○	
	Auto tool setter(Milling spindle, Non-contact, NC4 or BLUM)	○	○	○	○	○	○	
	Auto tool setter (Low turret)	X	X	○	X	X	○	
Automation	Removable tool setter (Low turret)	X	X	○	X	X	○	
	Auto workpiece measurement (RMP60)	○	○	○	○	○	○	
	Parts unloader and conveyor(both left & right spindle direction, pocket type or gripper type)	X	○	○	X	○	○	
	Workpiece ejector (TSC/TSA selectable)	X	○	○	X	○	○	
	Bar feeder interface	○	○	○	○	○	○	
	Robot interface	○	○	○	○	○	○	
Others	Automatic front door (with safety device)	○	○	○	○	○	○	
	DN Solutions tool monitoring system	●	●	●	●	●	●	
	Rotary type window wipe	○	○	○	○	○	○	
	Intelligent kinematic compensation for multi-tasking (Software customized by DN Solutions)	●	●	●	●	●	●	
	Intelligent kinematic compensation for multi-tasking(Datum ball gage)	○	○	○	○	○	○	
	Quick change tooling(Low turret, CAPTO)	X	X	○	X	X	○	
	AUTOMATIC POWER OFF	○	○	○	○	○	○	
Standard accessories	Display unit size	●	●	●	●	●	●	
	15 inch(Fanuc)	○	○	○	○	○	○	
	19 inch(Fanuc, CUFOS)	○	○	○	○	○	○	
	21.5 inch(Siemens)	○	○	○	○	○	○	
Customized special option	ADDITIONAL PORTABLE MPG	●	●	●	●	●	●	
	Foundation bolt for anchoring	○	○	○	○	○	○	
	Air limit sensing on chuck_Preparation	○	○	○	○	○	○	
	Tool setter extension for special chuck (Low turret)	X	X	○	X	X	○	
	Left/Right spindle air curtain	○	○	○	○	○	○	
	Coolant for milling spindle_Multi pressure	○	○	○	○	○	○	
Customized special option	Tool ID check system_Manual	○	○	○	○	○	○	
	Additional work light for ATC magazine	○	○	○	○	○	○	
	Angular head for milling spindle_ATC	○	○	○	○	○	○	

Description	Specifications	SMX 2600	SMX 3100	SMX 3100B/835	SMX 3100L	SMX 2600S	SMX 3100S	SMX 3100LS	SMX 2600ST	SMX 3100ST	
Tool shank	CAPTO C6	●	●	●	●	●	●	●	●	●	
	HSK-T63	○	○	○	○	○	○	○	○	○	
Automatic tool changer	7" operation touch panel	●	●	●	●	●	●	●	●	●	
	10.4" operation touch panel (including a camera in the magazine)	○	○	○	○	○	○	○	○	○	
Tool magazine	40 tools	●	●	●	●	●	●	●	●	●	
	80 tools	○	○	○	○	○	○	○	○	○	
	120 tools	○*	○*	○*	○*	○*	○*	○*	○*	○*	
Tool magazine for long tool	3 tools	X	X	X	○	X	X	○	X	X	
Low turret	12 stations turning	X	X	X	X	X	X	X	●	●	
	12 stations turn-milling (BMT65P)	X	X	X	X	X	X	X	○	○	
Work holding device	Left spindle	Hydraulic chuck 10"	●	X	X	X	●	X	X	●	X
		Hydraulic chuck 12"	○	●	●	●	○	●	○	○	●
		Hydraulic chuck 15"	X	○	○	○	X	○	○	X	○
	Right spindle	Hydraulic chuck 10"	X	X	X	X	●	●	●	●	●
		Hydraulic chuck 12"	X	X	X	X	○	○	○	○	○
	Dual pressure chucking (High pressure / Low pressure)		○	○	○	○	○	○	○	○	○
	Chuck clamp & Unclamp confirmation		○	○	○	○	○	○	○	○	○
	Servo driven steady rest (Z-movement)	SLU-3 (Ø14 ~ Ø152)	X	X	X	X	X	X	X	○	○
		SLU-3.1 (Ø20 ~ Ø165)	○	○	X	○	○	○	○	○	○
		SLU-3.2 (Ø50 ~ Ø200)	○	○	X	○	○	○	○	○	○
		SLU-4 (Ø30 ~ Ø245)	○	○	X	○	○	○	○	X	X
		SLU-5 (Ø45 ~ Ø310)	○	○	X	○	○	○	○	X	X
		K5.0 (Ø80 ~ Ø390)	X	X	X	○	X	X	○	X	X
		K5.1 (Ø100 ~ Ø410)	X	X	X	○	X	X	○	X	X
STA-3 (Ø12 ~ Ø152)		X	X	X	X	X	X	X	○	○	
STA-3.1 (Ø20 ~ Ø165)		○	○	X	○	○	○	○	○	○	
STA-3.2 (Ø50 ~ Ø220)		○	○	X	○	○	○	○	○	○	
STA-4 (Ø35 ~ Ø245)		○	○	X	○	○	○	○	X	X	
STA-5 (Ø45 ~ Ø310)	○	○	X	○	○	○	○	X	X		
STA-5.1 (Ø85 ~ Ø350)	X	X	X	○	X	X	○	X	X		
Coolant	T-T-C (Milling spindle)	Pressure 1.0MPa (145 psi)/ Element filter	●	●	●	●	●	●	●	●	
		Pressure 3.0MPa (435 psi)/ Cyclone filter	○	○	○	○	○	○	○	○	○
		Pressure 7.0MPa (1015 psi) / Cyclone filter	○	○	○	○	○	○	○	○	○
		Pressure 7.0MPa (1015 psi)/Paper filter	○	○	○	○	○	○	○	○	○
		MQL (Minimum quantity lubrication) system	○	○	○	○	○	○	○	○	○
	For Lower turret	Pressure 0.45MPa (65.2psi) / Tank screen fiter	X	X	X	X	X	X	X	●	●
		Pressure 0.7 / 1.0 / 1.45 MPa (101.5/145/151.1 psi) / Tank screen fiter	X	X	X	X	X	X	X	○	○
	Oil skimmer		○	○	○	○	○	○	○	○	○
	Coolant pressure switch (Standard for milling spindle / option for lower turret)		●	●	●	●	●	●	●	●	●
	Lower turret coolant filter		X	X	X	X	X	X	X	○	○
Coolant level switch : Sensing level - Low		○	○	○	○	○	○	○	○	○	
Chip disposal	Chip conveyor (Right disposal)	○	○	○	○	○	○	○	○	○	
	Chip bucket	○	○	○	○	○	○	○	○	○	
	Air blower (for Left or Right spindle chuck)	●	●	●	●	●	●	●	●	●	
	Chuck coolant (for Leftor Right spindle chuck)	○	○	○	○	○	○	○	○	○	
	Through spindle air shower (Left or Right)	○	○	○	○	○	○	○	○	○	
	Through spindle coolant (Left or Right)	○	○	○	○	○	○	○	○	○	
	Shower coolant (0.75kW, 85 liter/min)	○	○	○	○	○	○	○	○	○	
	Coolant gun	○	○	○	○	○	○	○	○	○	
	Air gun	○	○	○	○	○	○	○	○	○	
	Mist collector	○	○	○	○	○	○	○	○	○	
High accuracy	Thermal compensation	●	●	●	●	●	●	●	●	●	
	Ball screw core cooling (X-axis)	●	●	●	●	●	●	●	●	●	
	Ball screw core cooling (Y/Z-axis)	○	○	○	○	○	○	○	○	○	
	Water soluble Coolant Chiller**	○	○	○	○	○	○	○	○	○	
	Linear scale (X1-axis)	○	○	○	●	○	○	○	○	○	
	Linear scale (X2-axis)	X	X	X	X	X	X	X	○	○	
Linear scale (Y / Z-axis)	○	○	○	○	○	○	○	○	○		
Measurement	Oil cooler cooling flow detector	○	○	○	○	○	○	○	○	○	
	Auto tool setter(Milling spindle,Touch)	○	○	○	○	○	○	○	○	○	
	Auto tool setter(Milling spindle, Non-contact, NC4 or BLUM)	○	○	○	○	○	○	○	○	○	
	Auto tool setter (Low turret)	X	X	X	X	X	X	X	○	○	
Automation	Removable tool setter (Low turret)	X	X	X	X	X	X	X	○	○	
	Auto workpiece measurement (RMP60)	○	○	○	○	○	○	○	○	○	
	Parts unloader and conveyor(pocket type or gripper type)	X	X	X	X	○	○	X	○	○	
	Workpiece ejector (TSC/TSA selectable)	X	X	X	X	○	○	X	○	○	
Others	Bar feeder interface	○	○	○	○	○	○	○	○*	○*	
	Automatic front door (with safety device)	○	○	○	○	○	○	○	○	○	
	DN Solutions tool monitoring system	●	●	●	●	●	●	●	●	●	
	Rotay type window wipe	○	○	○	○	○	○	○	○	○	
Standard accessories	Intelligent kinematic compensation for multi-tasking (Software customized by DN Solutions)	●	●	●	●	●	●	●	●	●	
	Intelligent kinematic compensation for multi-tasking(Datum ball gage)	○	○	○	○	○	○	○	○	○	
	Quick change tooling(Low turret, CAPTO)	X	X	X	X	X	X	X	○	○	
	Display unit size	15 inch(Fanuc)	●	●	●	●	●	●	●	●	●
19 inch(Fanuc, CUFOS)		○	○	○	○	○	○	○	○	○	
21.5 inch(Siemens)		●	●	●	●	●	●	●	●	●	
Customized special option	Foundation bolt for anchoring	●	●	●	●	●	●	●	●	●	
	Air limit sensing on chuck_Preparation	○	○	○	○	○	○	○	○	○	
	Tool setter extension for special chuck	X	X	○	X	X	X	X	○	○	
	Main/Left spindle air curtain	○	○	○	○	○	○	○	○	○	
	Sub/Right spindle air curtain	X	X	X	X	○	○	○	○	○	
	Coolant for milling spindle_Multi pressure	○	○	○	○	○	○	○	○	○	
	Tool ID check system_Manual	○	○	○	○	○	○	○	○	○	
Additional work light for ATC magazine	○	○	○	○	○	○	○	○	○		
Angular head for milling spindle_ATC	○	○	○	○	○	○	○	○	○		

* Bar feeder interface is not available if 120 tools magazine is applied on the machine. ● Standard ○ Optional X N/A
 ** Technical consultation is mandatory for the chilling of non-water soluble coolant
 * Please contact your DN Solutions representative for detailed machine information.
 * When using a semi-synthetic type or synthetic type, contact our sales representative or service center in advance.

PERIPHERAL EQUIPMENT


Tailstock application for lower turret OPTION

- Steady rest to support long and slim components, and for improving machining stability
- Tailstock application for lower turret is available for SMX 2600ST/3100ST. OPTION




Tool setter (Automatic) OPTION

Auto linear motion type tool setter has been installed for tool measurement and tool wear detection. It is stored in a safe location during the machining process, and can be activated with the workpiece still in place in the chuck with no interference.

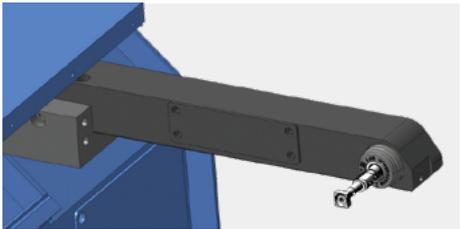

Gear skiving solutions

Dramatic improvements in productivity for gear skiving solutions such as power skiving, involute-milling and hobbing are available - enabling high-precision external / internal gear machining in a single setup.

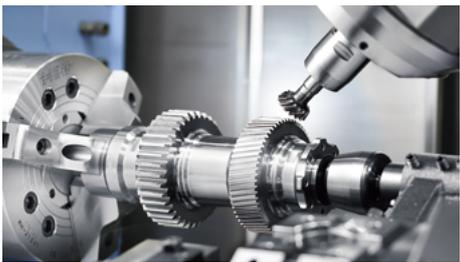

* Please contact to DN Solutions on further information.

Linear scales OPTION

Linear scales are ideal for high accuracy simultaneous 5-axis machining, long machining runs and operation, and higher feed precision.

Quick change CAPTO OPTION


The quick change tool system simplifies tool change operations. Recommended for users who need to change tools frequently or to reduce set-up times.



* Lower turret applicable

Servo-driven steady rest OPTION

Steady rests support long workpieces during the machining process. Linear positioning of the steady rest is achieved by the servo motor and ball screw and can be positioned in cycle.

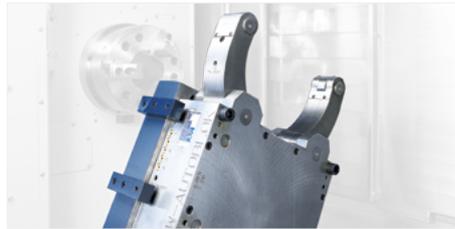

Servo-driven steady rest	SMX 2100/S/L/LS/B/SB	SMX 2100ST/LST/STB	SMX 2600/S	SMX 2600ST	SMX 3100/S	SMX 3100ST	SMX 3100L/LS
SLU-3.1 (Ø20-Ø165mm)	○	-	○	-	○	-	○
SLU-3.2 (Ø50-Ø200mm)	○	-	○	-	○	-	○
SLU-4 (Ø30-Ø245mm)	○	-	○	-	○	-	○
SLU-5 (Ø45-Ø310mm)	○	-	○	-	○	-	○
SLU-5.1 (Ø85-Ø350mm)	-	-	-	-	-	-	○ (Parking function)
K 5.0 (Ø80-Ø390mm)	-	-	-	-	-	-	○ (Parking function)
K 5.1 (Ø100-Ø410mm)	-	-	-	-	-	-	○ (Parking function)
Lower turret_SLU-3 (Ø14-Ø152mm)	-	○	-	○	-	○	-
Lower turret_SLU-3.1 (Ø20-Ø165mm)	-	○	-	○	-	○	-
Lower turret_SLU-3.2 (Ø50-Ø200mm)	-	-	-	○	-	○	-

Steady rest parking function*

When you don't want to use the steady rest, you can park it under the left chuck.

* This function is available for the SMX 3100L/LS. The steady rest will be from the following SLU5.1, K5.0 and K5.1.




Chip conveyor (Right side exit) OPTION

The conveyor provides a superior chip removal system and has a stable structure for easy maintenance and reduced leakage. By selecting the correct type of conveyor, the efficiency of the machine is increased.

Name	Hinge belt	Magnetic scraper	Drum filter + Hinge scraper (Double type)
Application	For steel	For castings	For steel, castings, nonferrous metal
Features	<ul style="list-style-type: none"> General Appropriate for a heavy material chip of more than 30 mm in length 	<ul style="list-style-type: none"> Easy maintenance Eject the chip by scraping and raising the chip with the scraper 	<ul style="list-style-type: none"> Appropriate for both a long and a short chip Filtering coolant
Shape			

Coolant chiller (Recommendation) OPTION

Coolant chiller is highly recommended to prevent temperature rise and minimize thermal deformation, when using a water-insoluble coolant or high-pressure coolant system of which the power is over 1.5 kw.

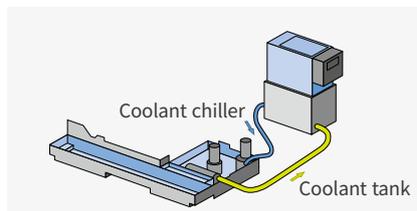

Optional equipment for automation OPTION

Peripheral equipment is available to support the SMX improve its performance and productivity.




- Bar feeder interface
- Parts unloader and conveyor
- Workpiece ejector
- Robot automation


POWER | TORQUE

FANUC 31i-B Plus


Left_SMX 2100/S/ST/L/LS/LST
Right_SMX 2100S/ST/LS/LST/SB/STB

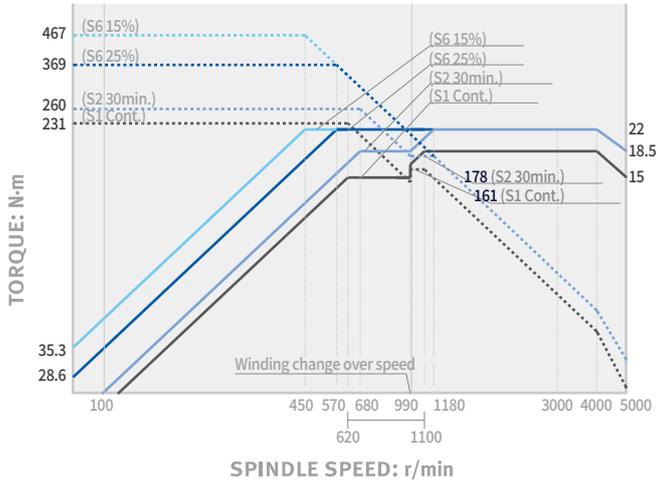


Left_SMX 2100B/SB/STB

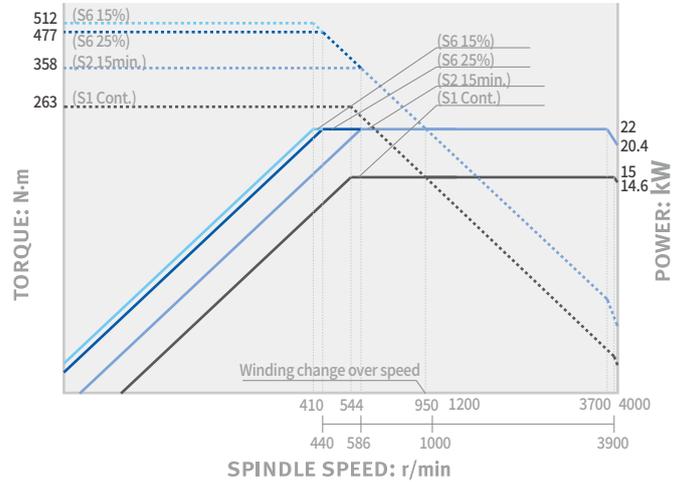


Rotary tool for lower turret (Milling) OPTION
SMX 2100S/ST/LS/LST/SB/STB_5000 r/min

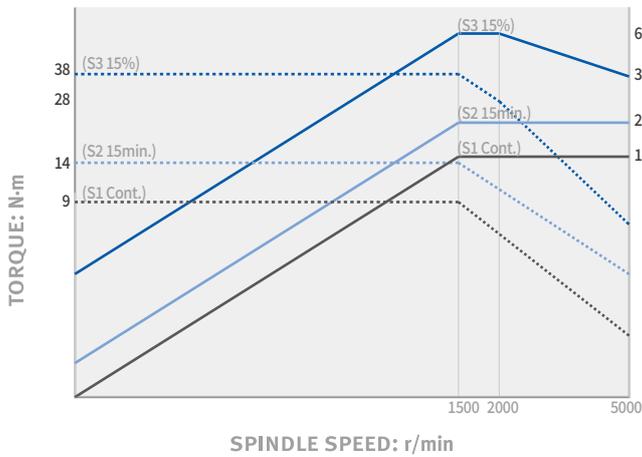


Rotary tool for lower turret (Milling) OPTION
SMX 2100ST/LST/STB_10000 r/min

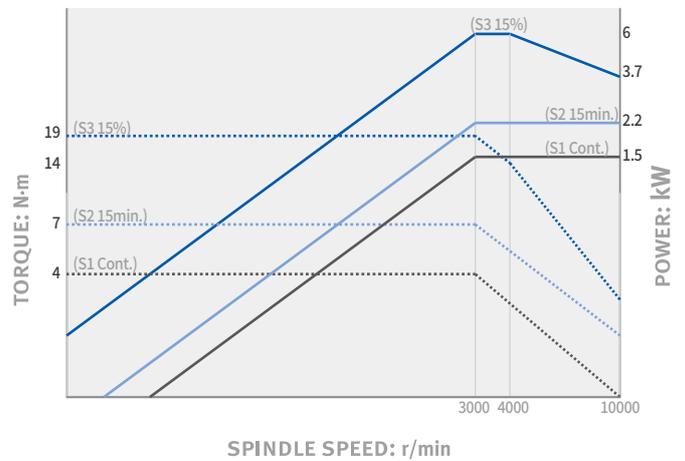

Milling
SMX 2100/S/ST/L/LS/LST/B/SB/STB

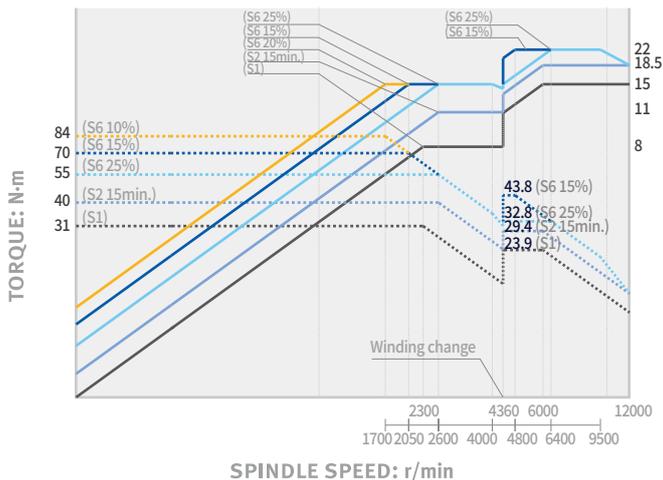

Milling
SMX 2100/S/ST/L/LS/LST/B/SB/STB_20000 r/min

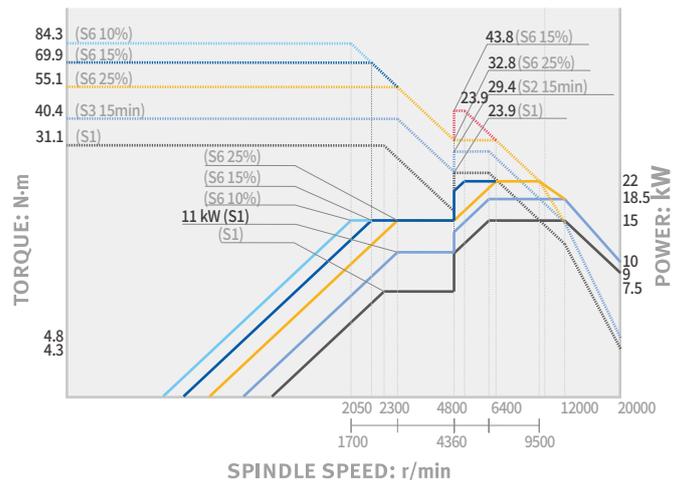


POWER | TORQUE

FANUC 31i-B Plus


Left

SMX 2600/S/ST

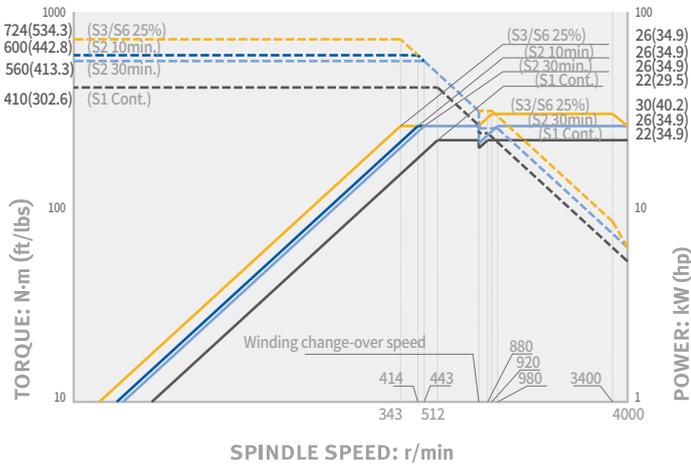


Left

SMX 3100/L/S/LS/ST

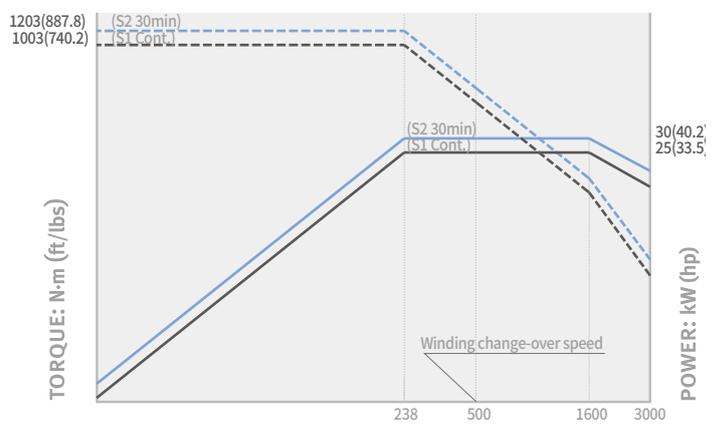


Right

SMX 2600S/ST · 3100S/LS/ST

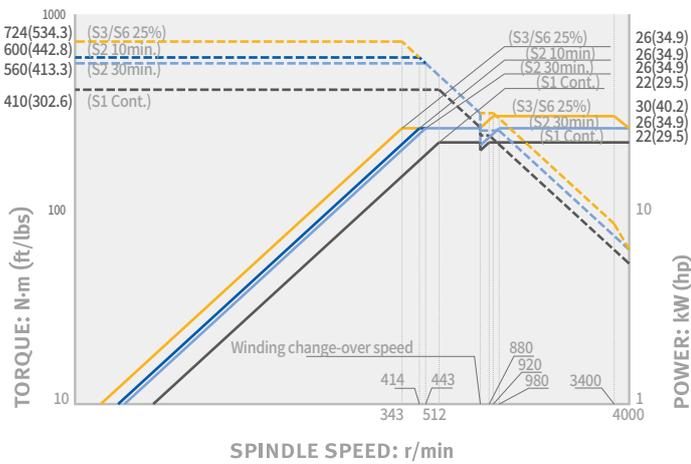


Left

SMX 3100B/835

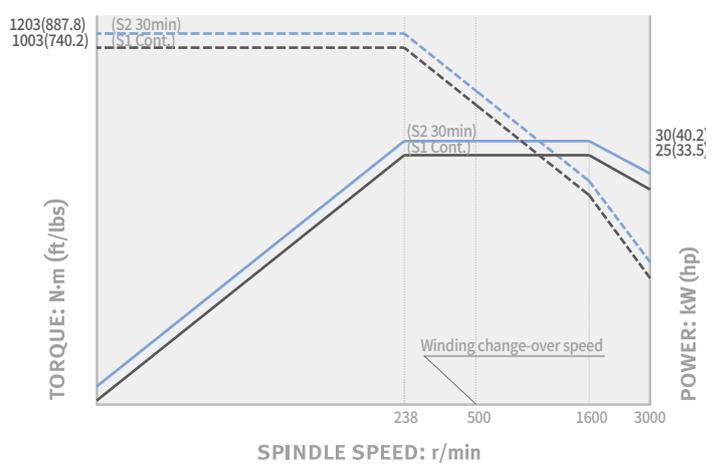


Milling

SMX 2600/S/ST · 3100/L/S/LS/ST · SMX 3100B/835

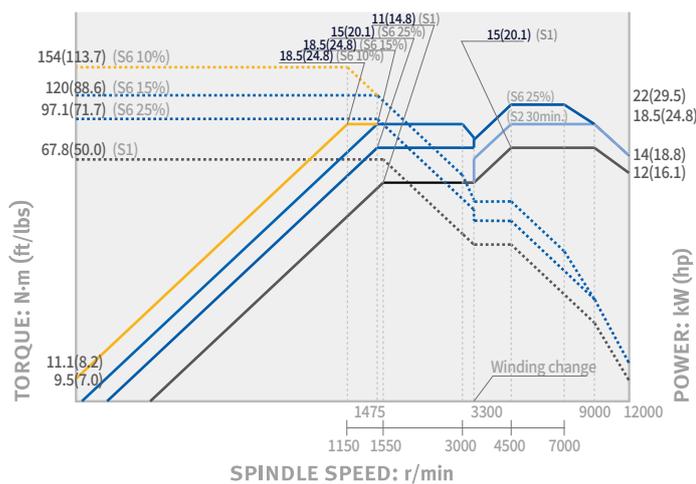

Rotary tool for lower turret (Milling)


SMX 2600ST · 3100ST

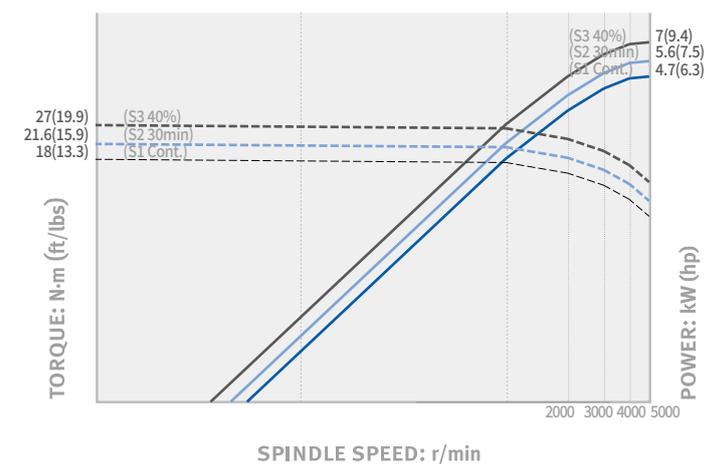


POWER | TORQUE

SIEMENS


Left
SMX 2600/S/ST

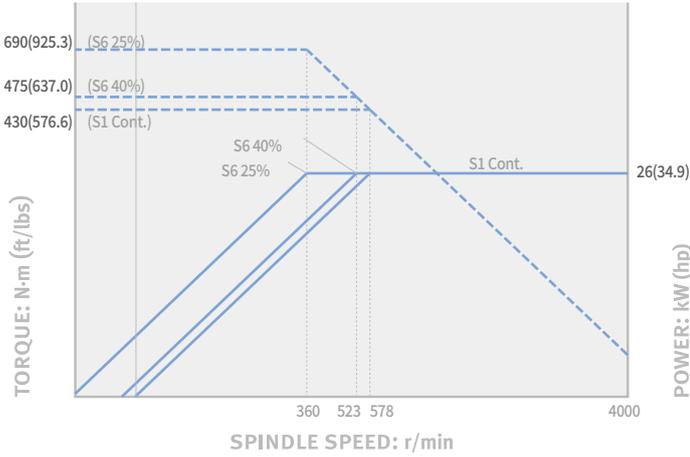


Left
SMX 3100/L/S/LS/ST

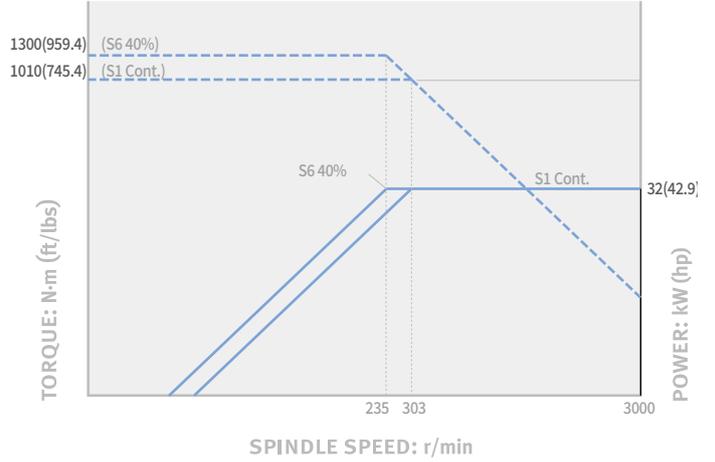


Right
SMX 2600S/ST · 3100S/LS/

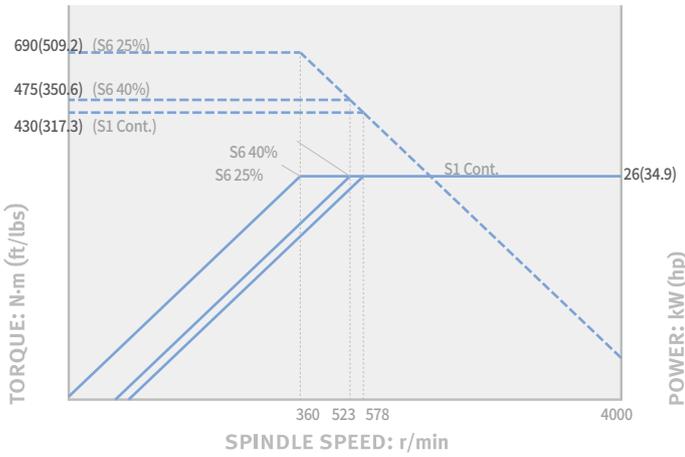

Milling
SMX 2600/S/ST · 3100/L/S/LS/ST

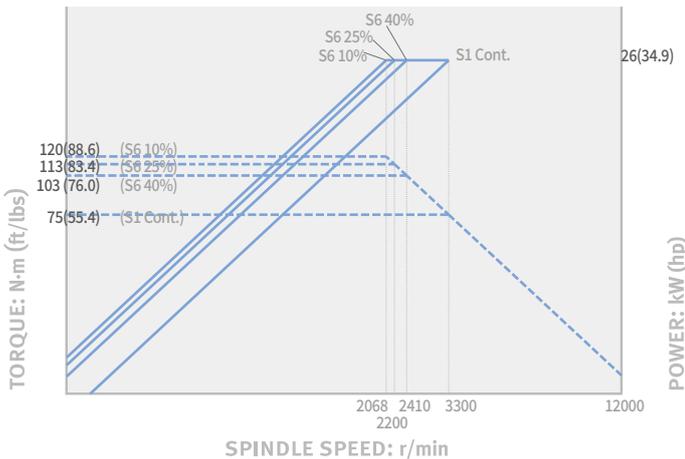

Lower turret
SMX 2600ST · 3100ST

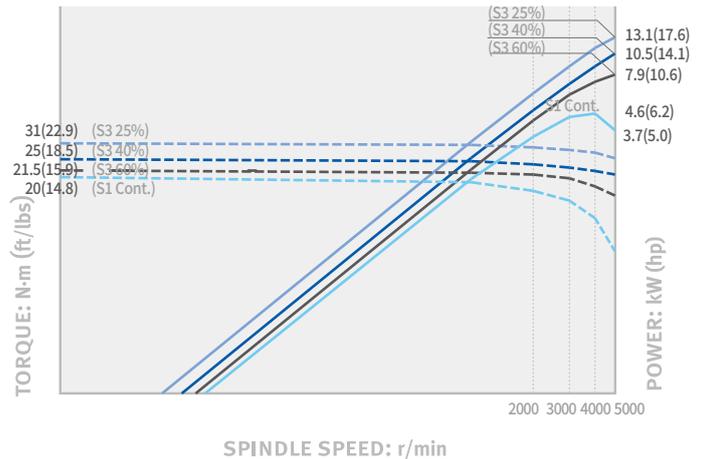


TOOL INTERFACE


SMX 2600ST · 3100ST

Unit : mm (inch)


For turning
(12 stations)

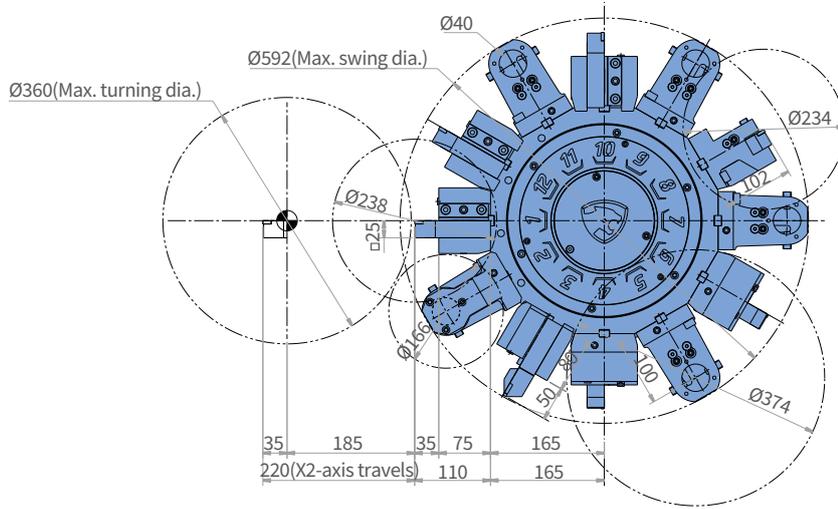

For turn-milling OPTION
(12 stations, BMT55P)

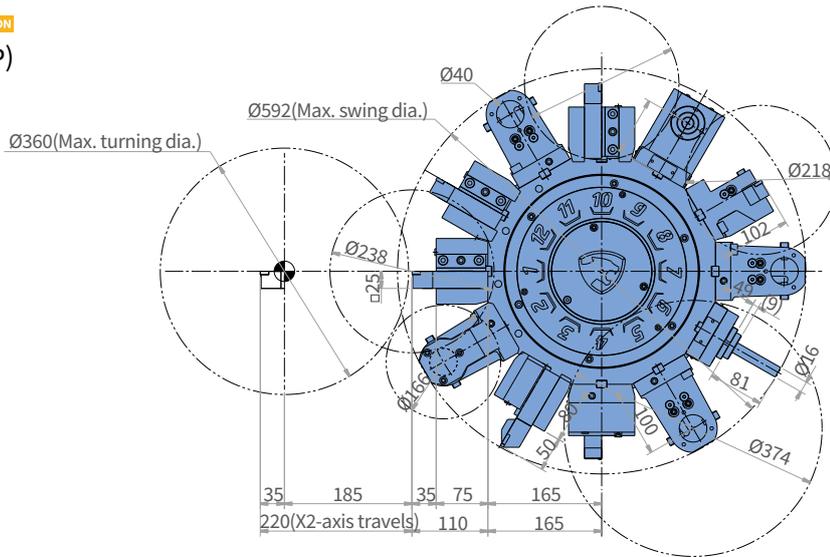

For turn-milling OPTION
(12 stations, 24indexing BMT55P)

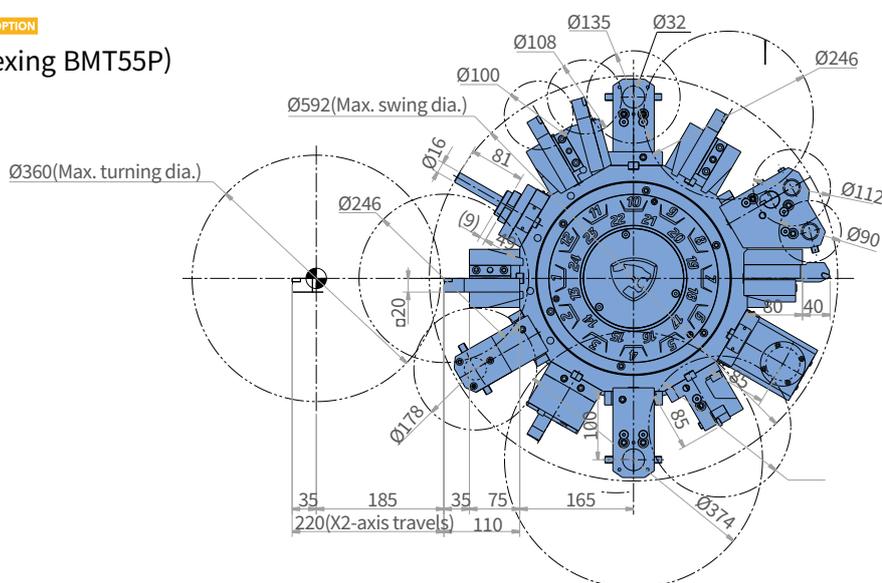


TOOL INTERFACE


SMX 2100/S/ST/B/SB/STB

Unit : mm (inch)

For turning (12 stations)

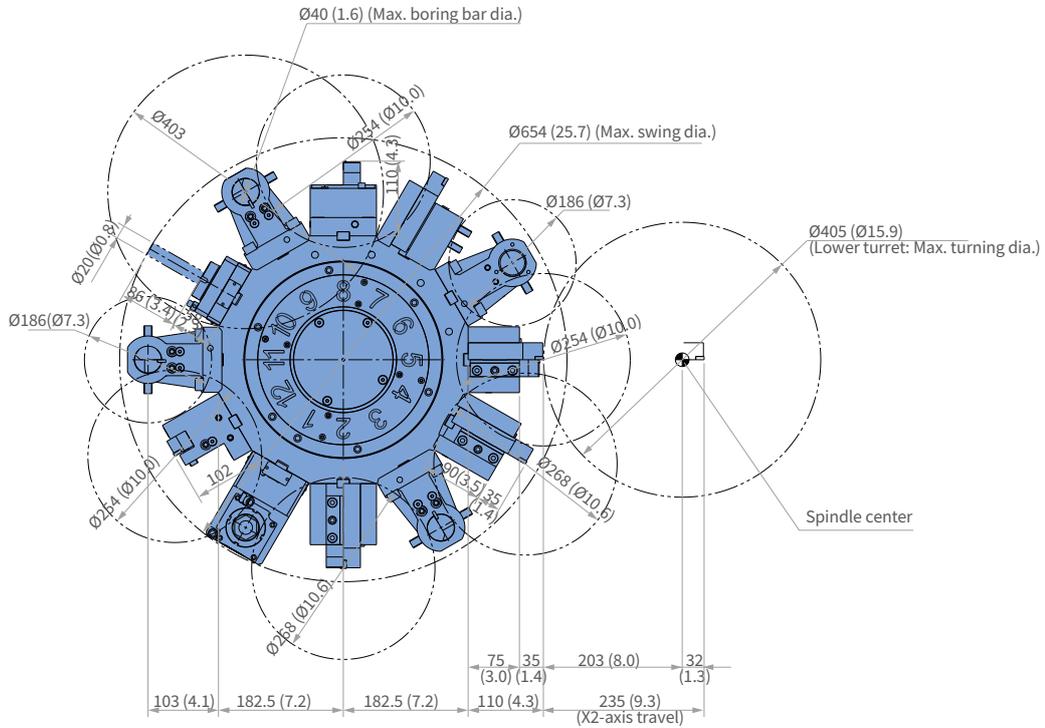



For turn-milling OPTION (12 stations, BMT65P)

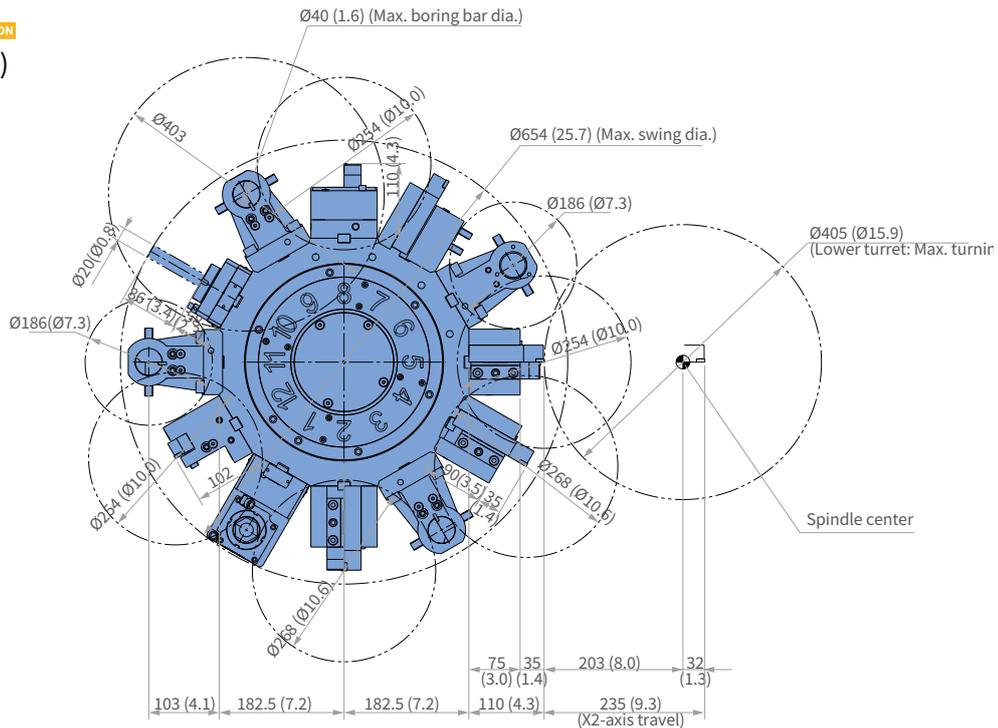

EXTERNAL DIMENSIONS

SMX 2100/S/ST/B/SB/STB

Unit : mm (inch)

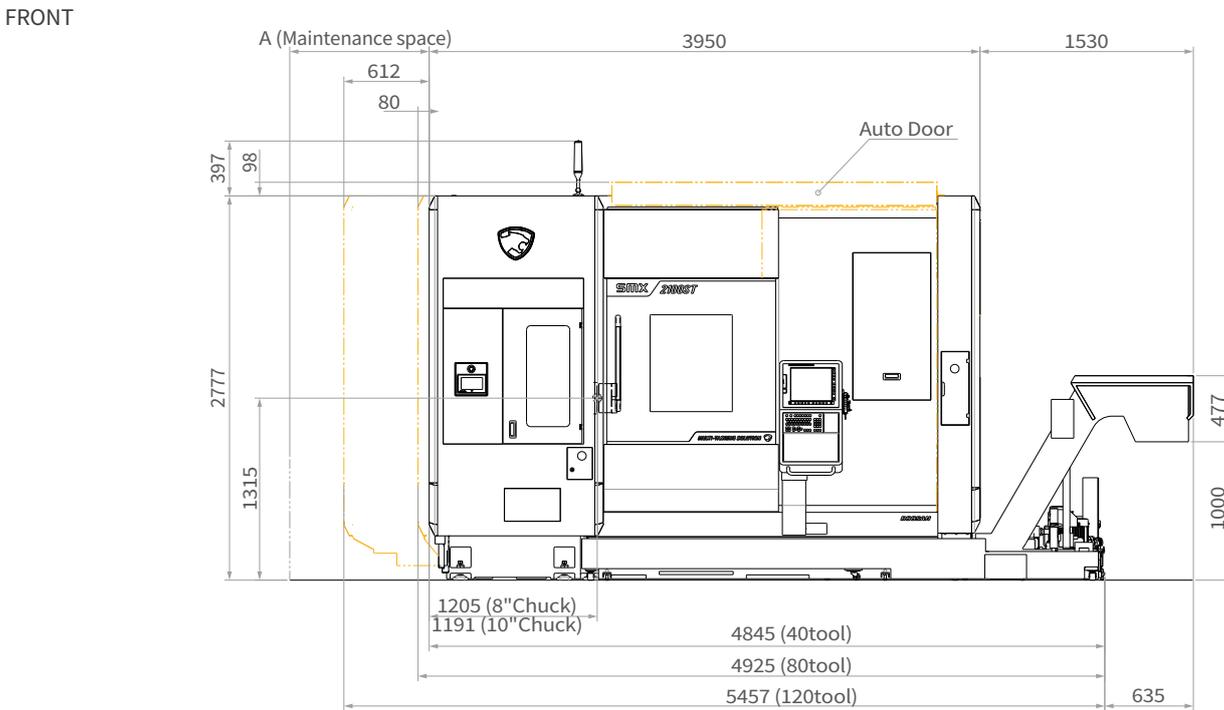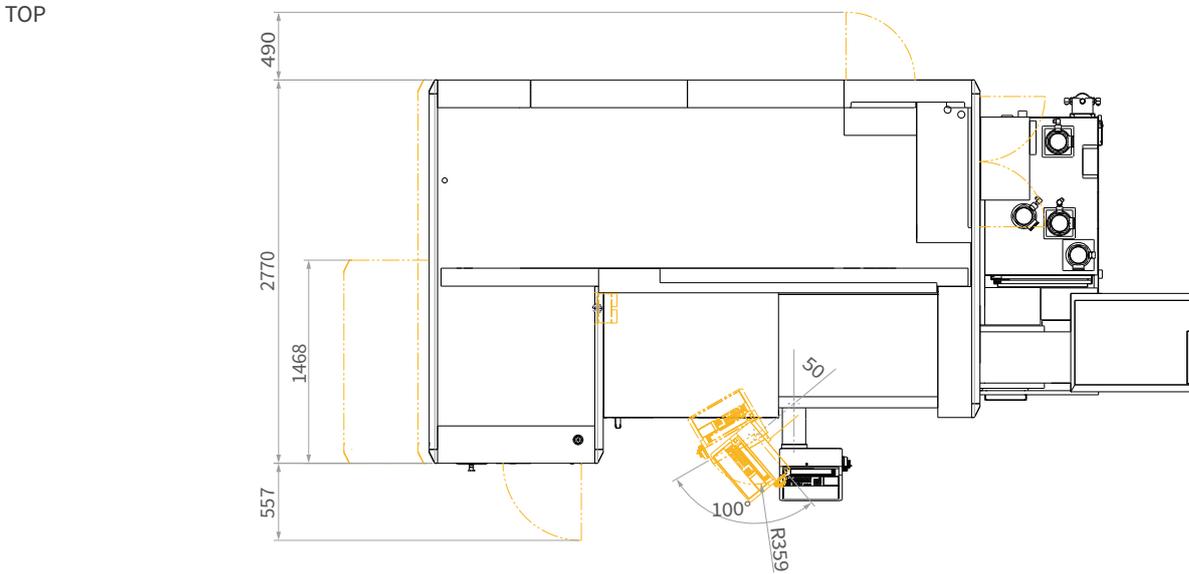

Maintenance space	A
40 tool	1000 (39.4)
80 tool	1080 (42.5)
120 tool	1612 (63.5)

Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time. The anchor bolts and other related parts for foundation work are supplied as standard items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.


* Some peripherals can be placed in different locations.

EXTERNAL DIMENSIONS


SMX 2100L

Unit : mm (inch)

TOP

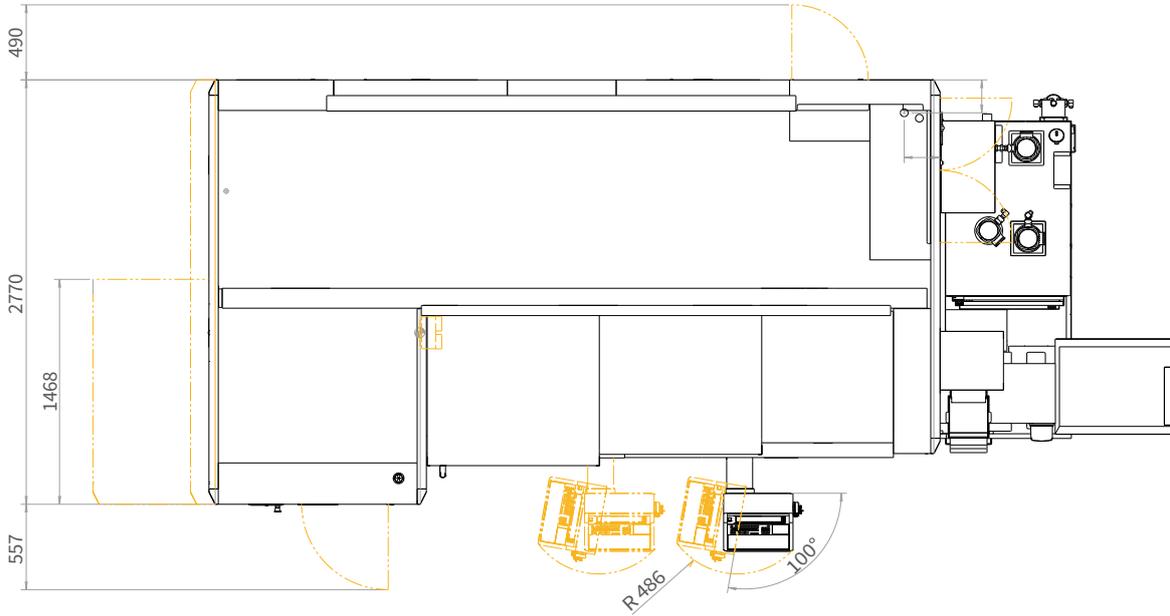

FRONT

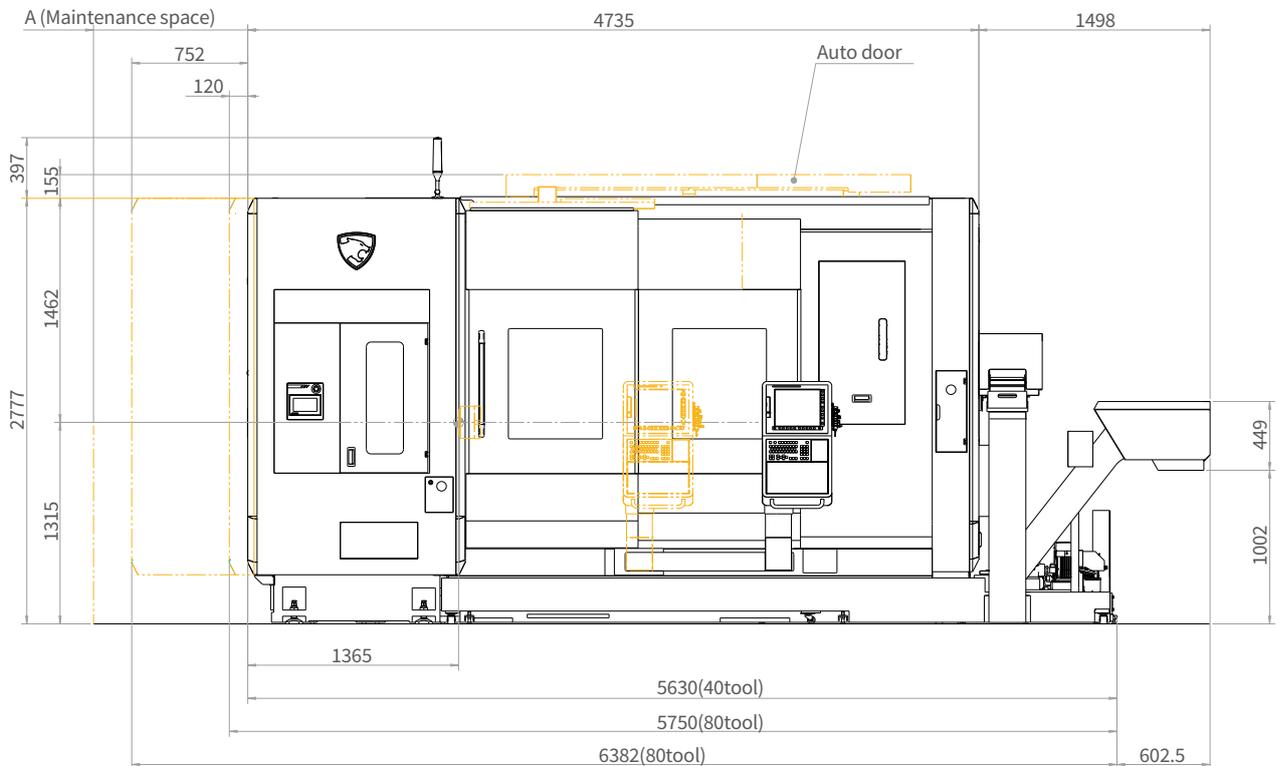



Maintenance space	A
40 tool	1000 (39.4)
80 tool	1120 (44.1)
120 tool	1752 (69.0)

Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time. The anchor bolts and other related parts for foundation work are supplied as standard items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.

EXTERNAL DIMENSIONS

SMX 2600/S · 3100/L/S/LS

Unit : mm (inch)

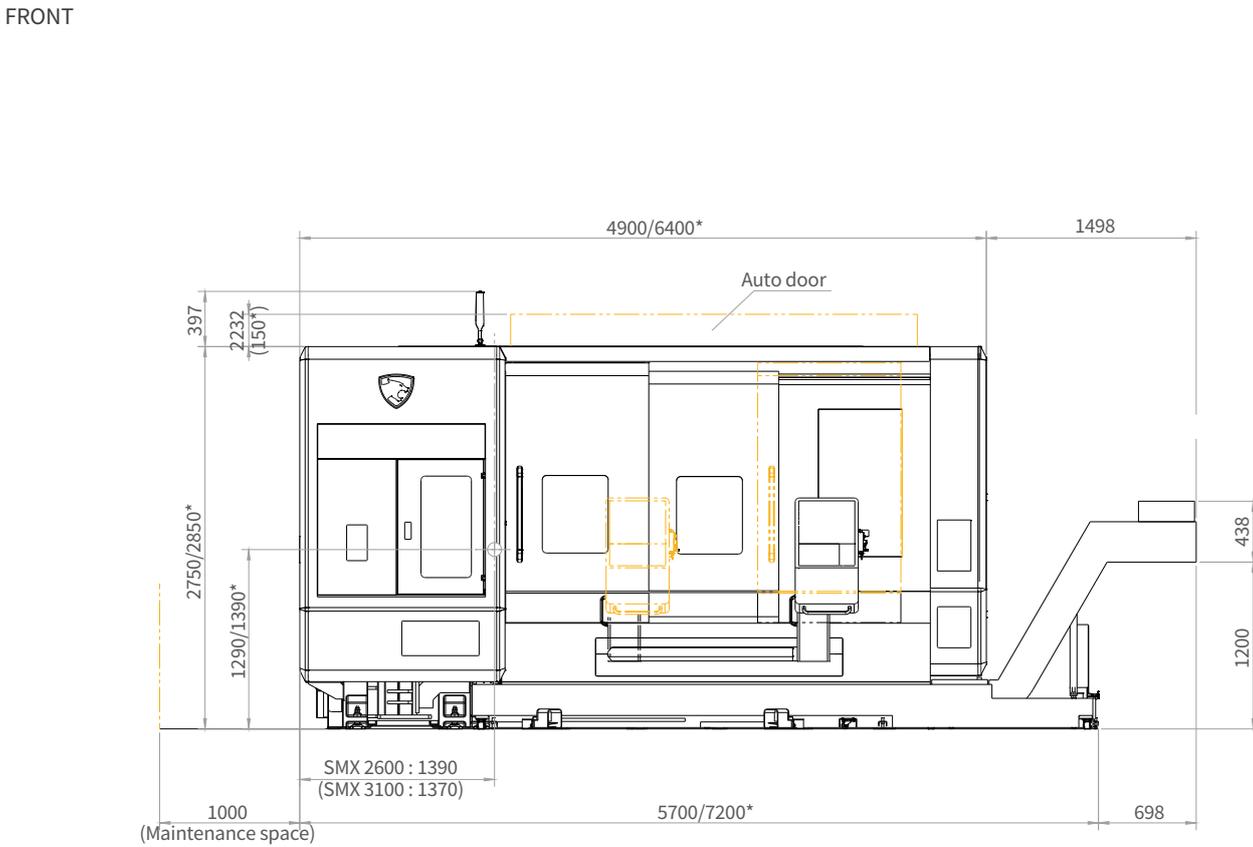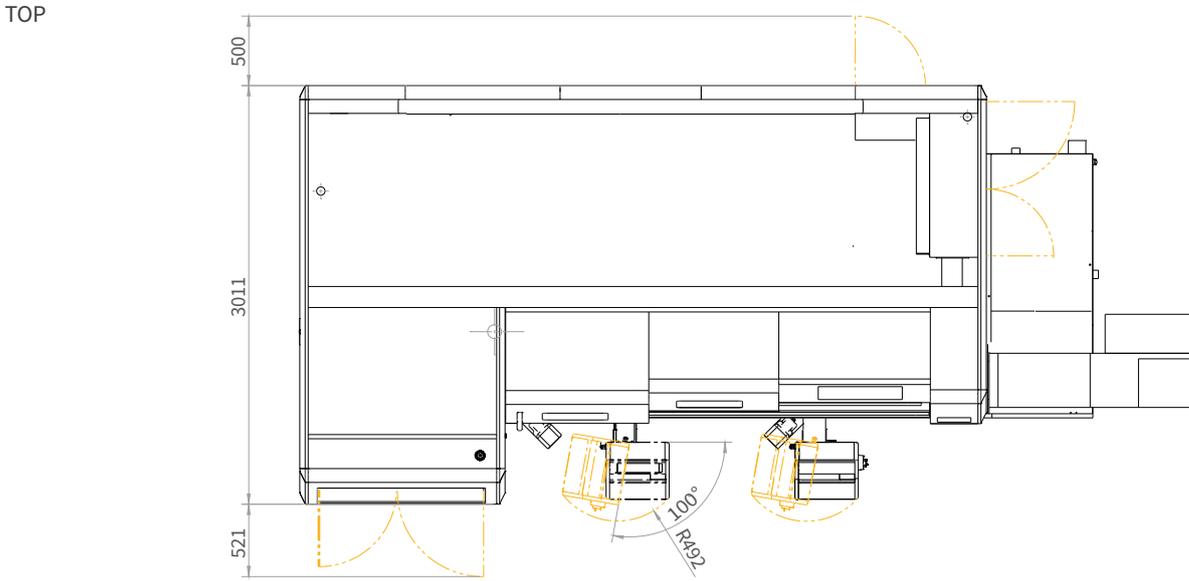

Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time. The anchor bolts and other related parts for foundation work are supplied as standard items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.


* Some peripherals can be placed in different locations.

EXTERNAL DIMENSIONS

SMX 2600ST · 3100ST


Unit : mm (inch)

TOP

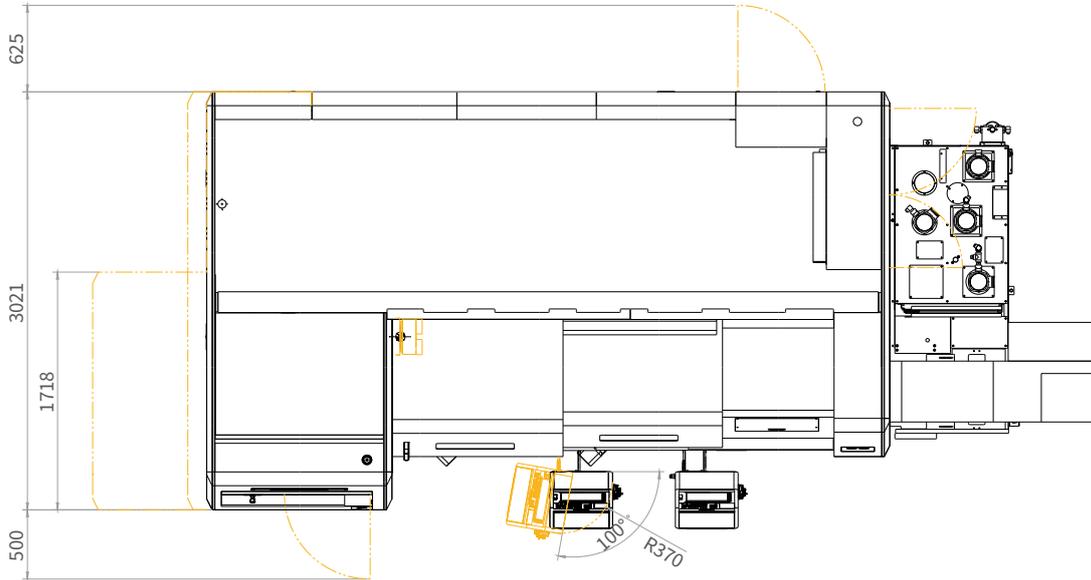

FRONT

Maintenance space	D	Chip conveyor type	A	B	C
40 tool	1000 (39.4)	Hinge belt type	1498 (59.0)	1100 (43.3)	0
80 tool	1135 (44.7)	Drum filter+ Hinge scraper type	2355 (92.7)	1100 (43.3)	70 (2.8)
120 tool	1817 (71.5)				

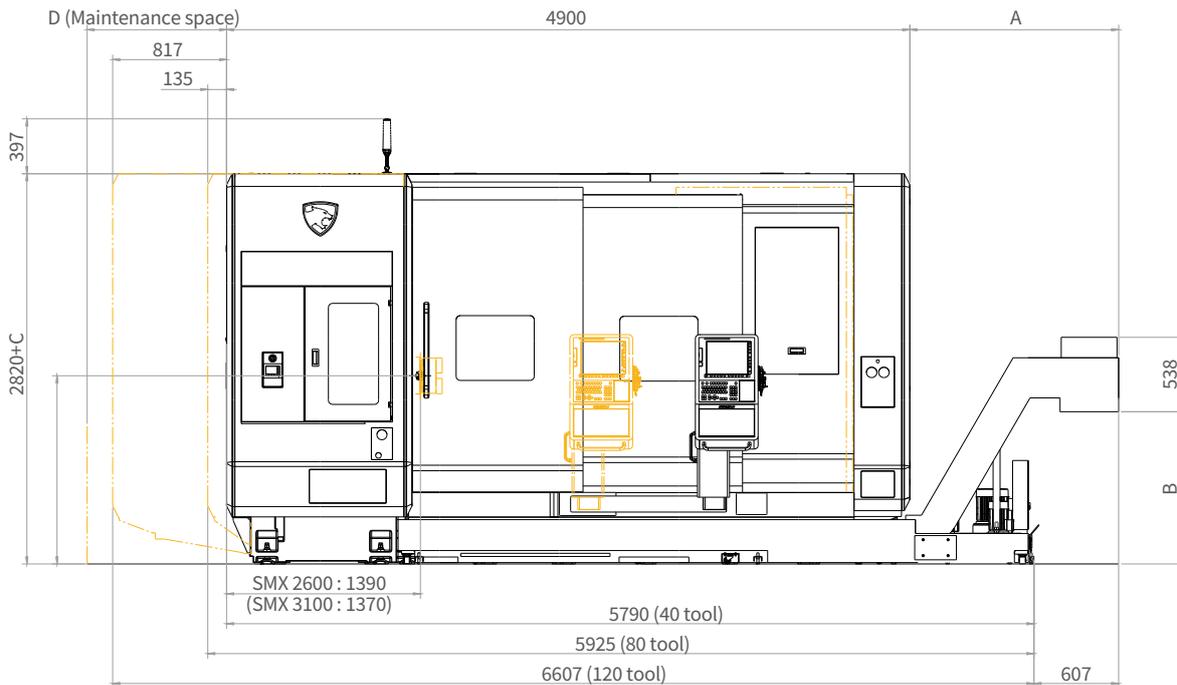


Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time. The anchor bolts and other related parts for foundation work are supplied as standard items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.

EXTERNAL DIMENSIONS


SMX 3100B/835

Unit : mm (inch)

TOP

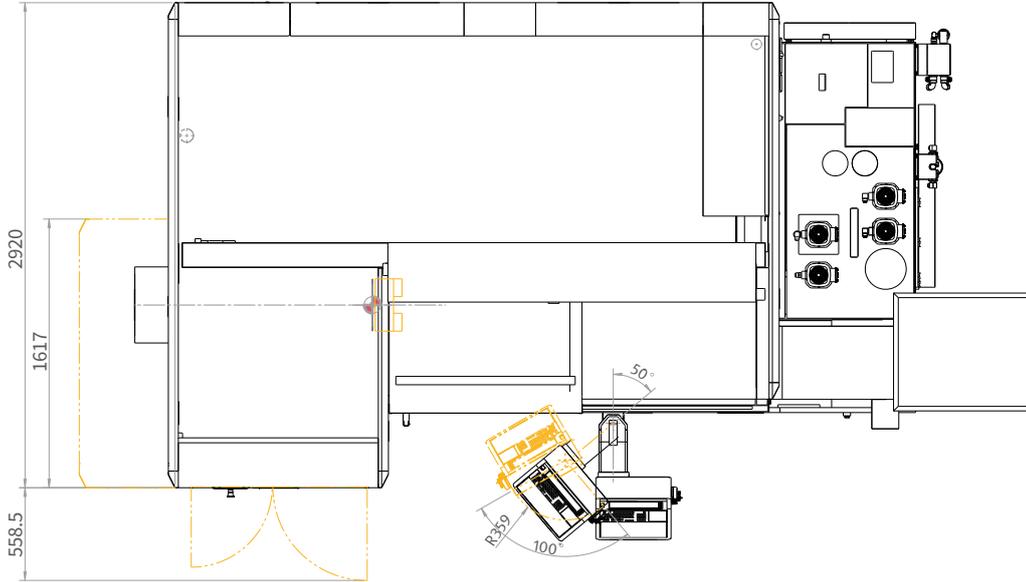

FRONT

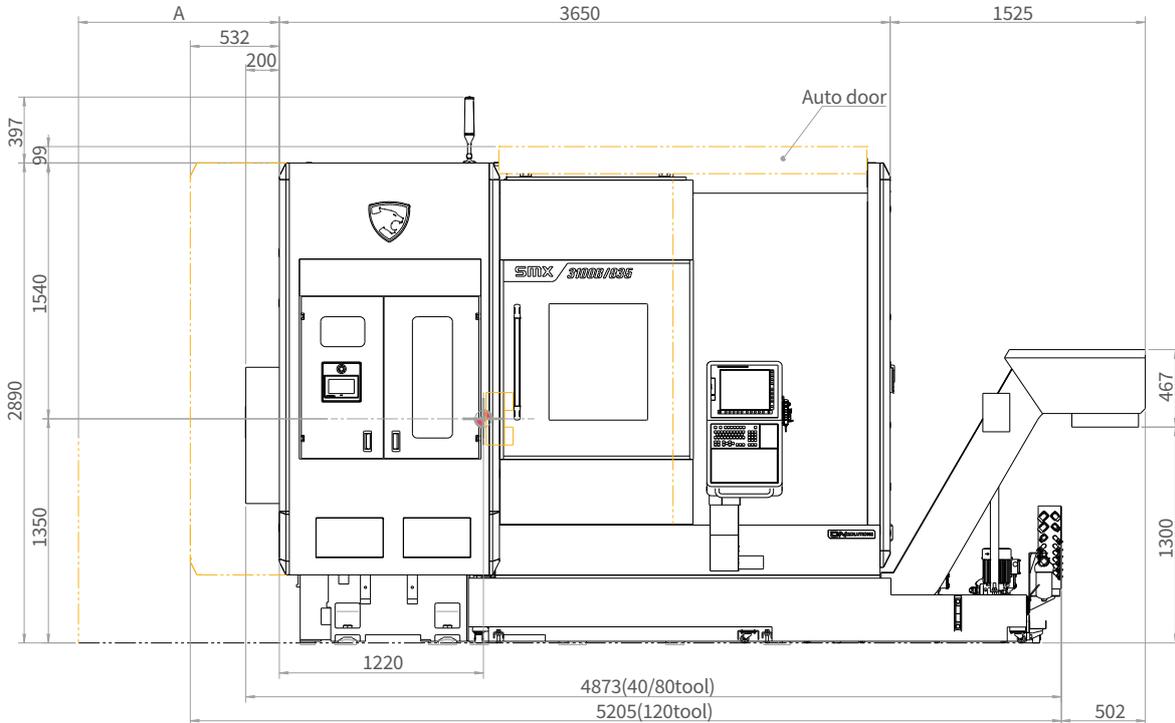

Maintenance space	A
40 tool	1200 (47.2)
80 tool	1200 (47.2)
120 tool	1532 (60.3)


Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time. The anchor bolts and other related parts for foundation work are supplied as standard items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.

* Some peripherals can be placed in different locations.

TOOLING SYSTEM

SMX 2100ST/STB


Unit : mm (inch)

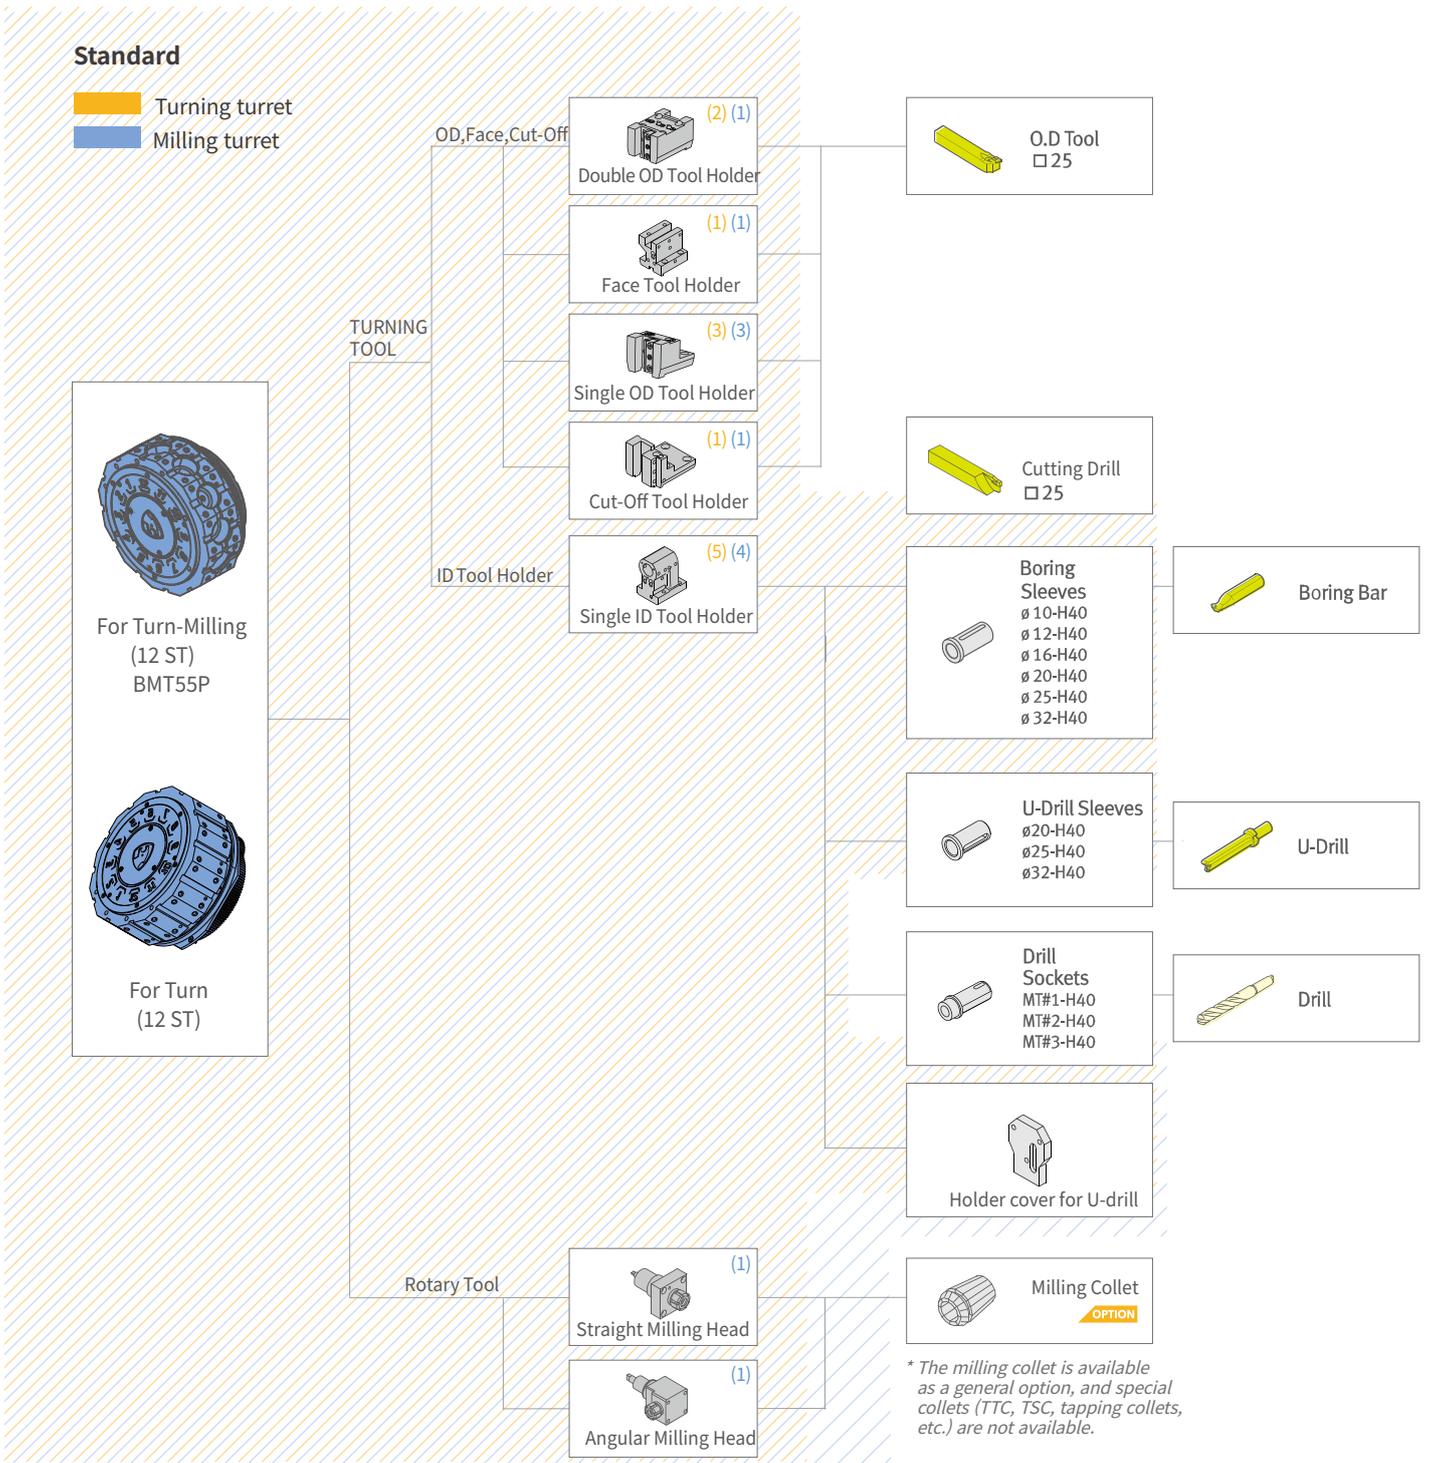

TOOLING SYSTEM

SMX 2100ST/STB


Unit : mm (inch)

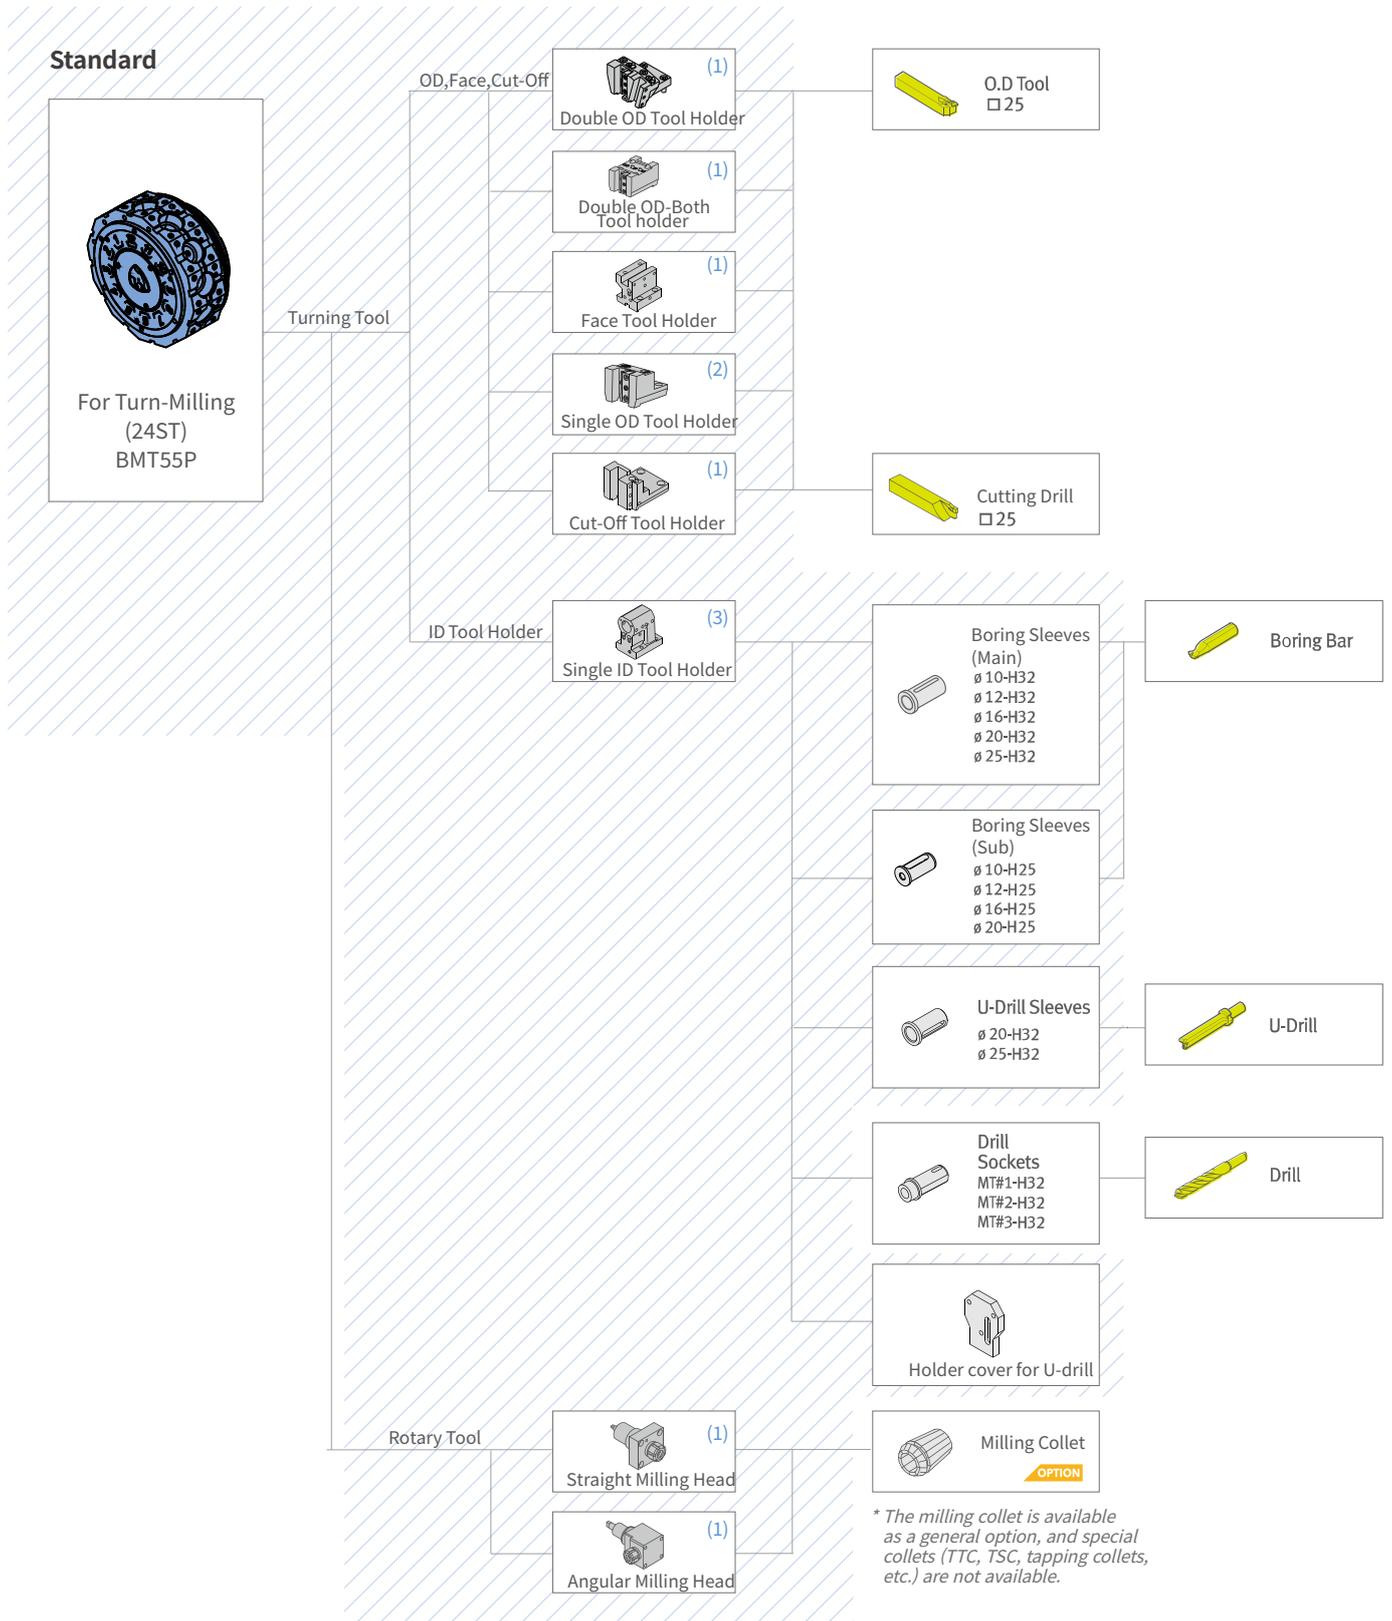

TOOLING SYSTEM

SMX 2600ST · 3100ST

Unit : mm (inch)

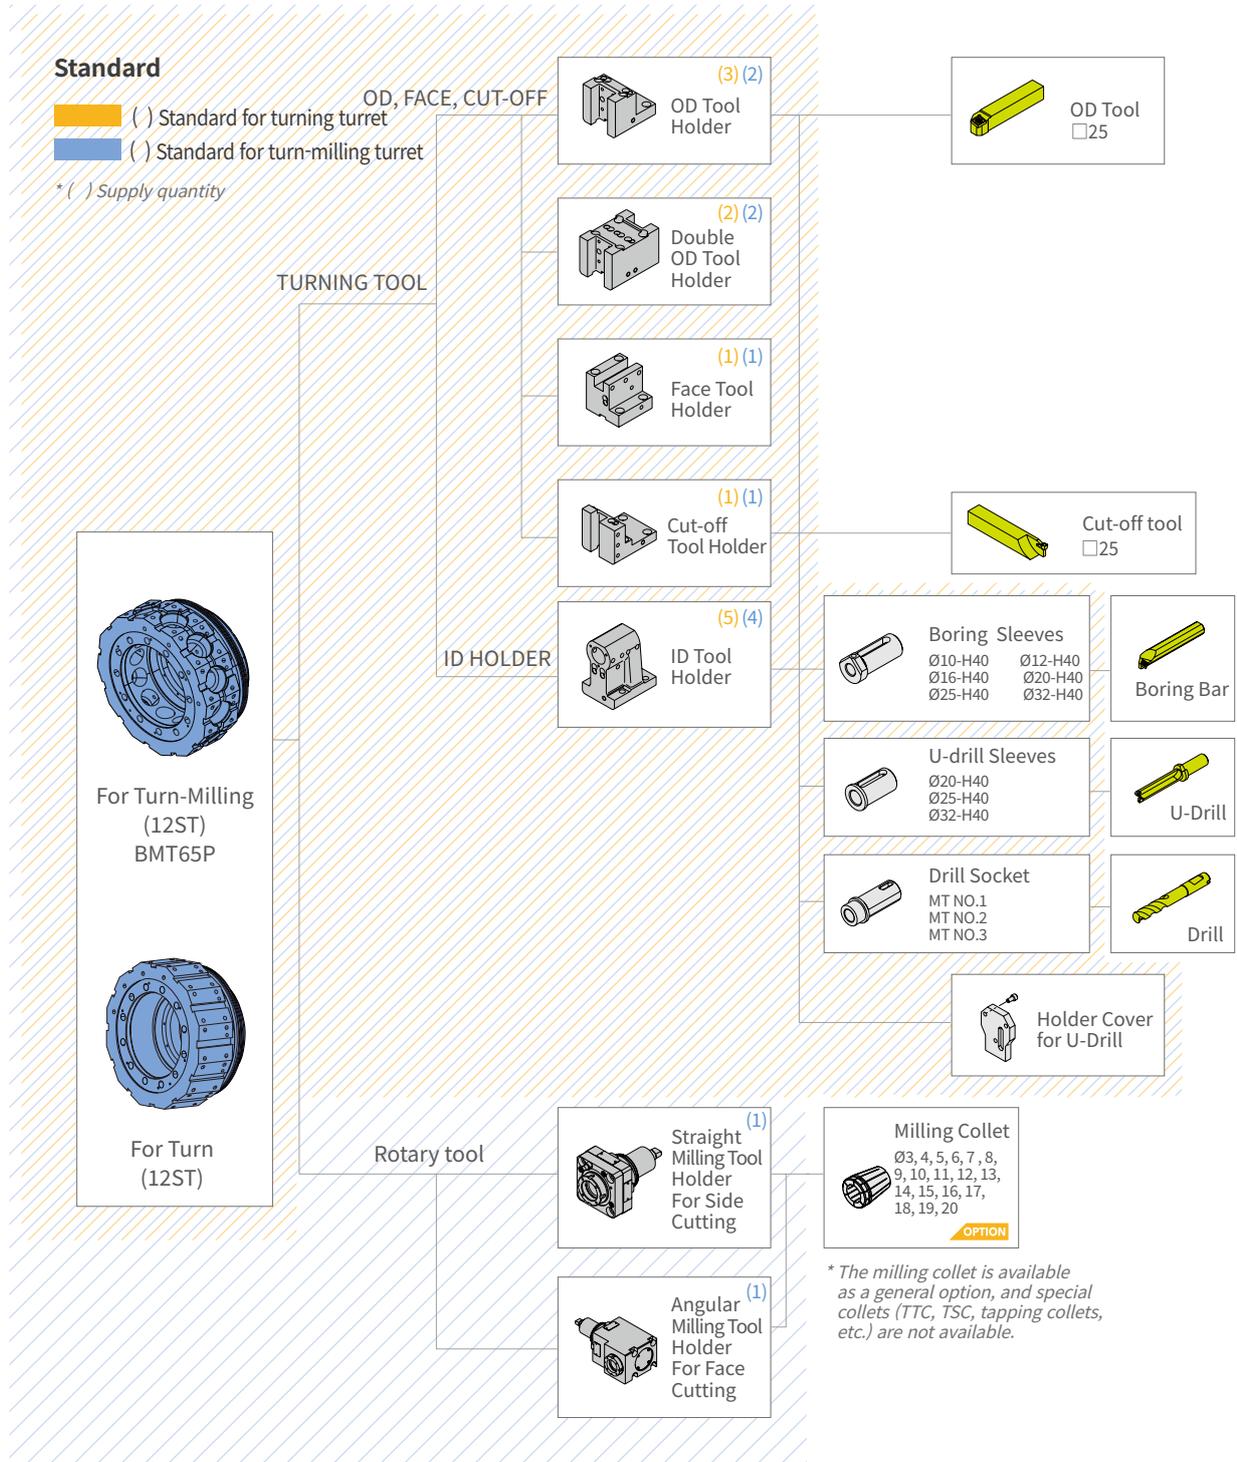

WORKING RANGE



SMX 2100/B/S/SB

Unit : mm (inch)

SMX 2100/B

ENTIRE RANGE



X1,Y-AXIS WORKING RANGE

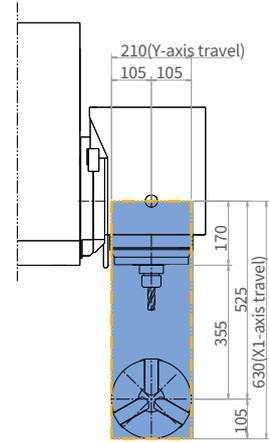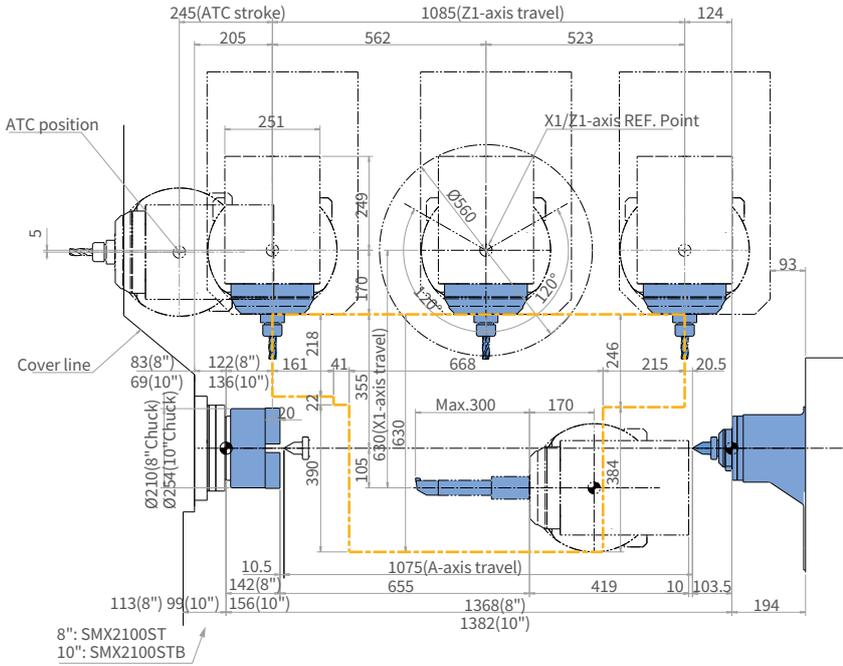

SMX 2100S/SB

ENTIRE RANGE

X1,Y-AXIS WORKING RANGE

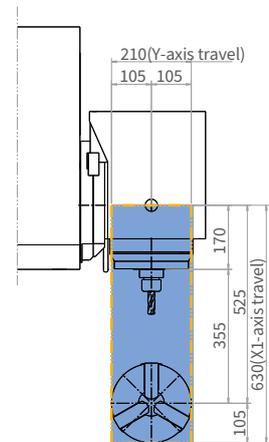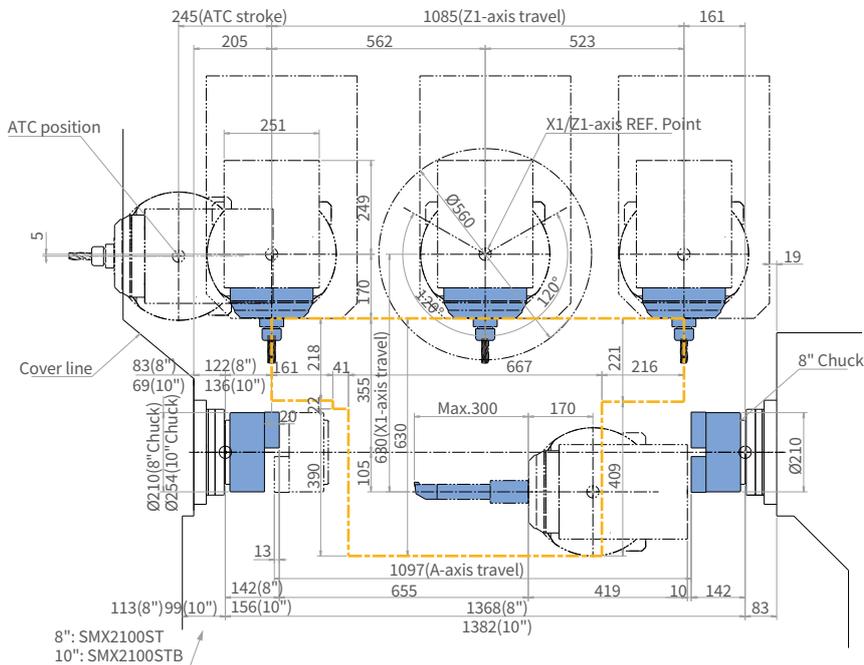


WORKING RANGE


SMX 2100ST/STB

Unit : mm (inch)


ENTIRE RANGE

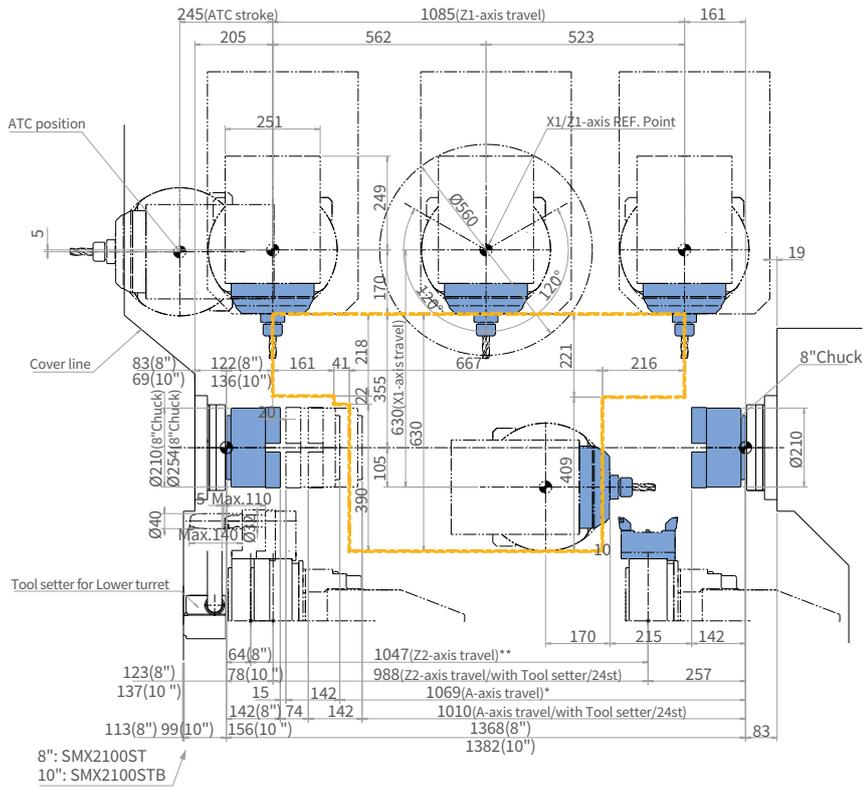

X1,Y,X2 - AXIS WORKING RANGE

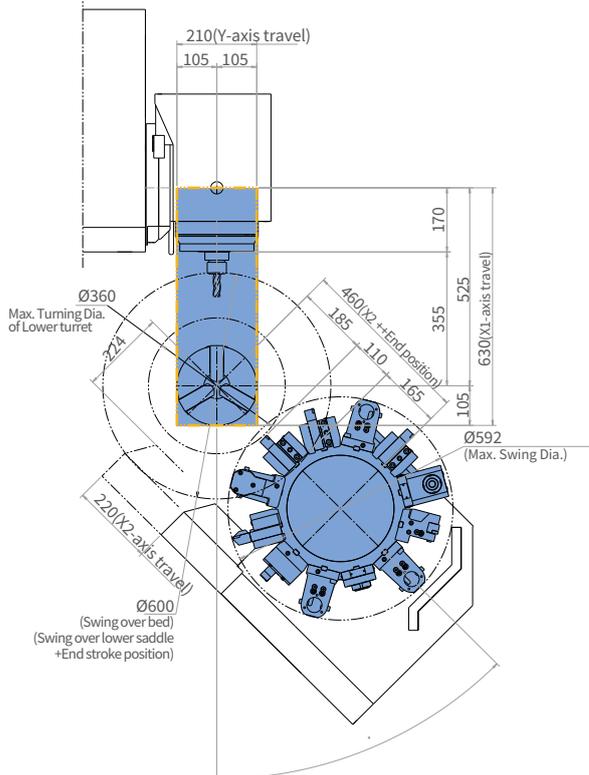

B-AXIS ROTATING RANGE

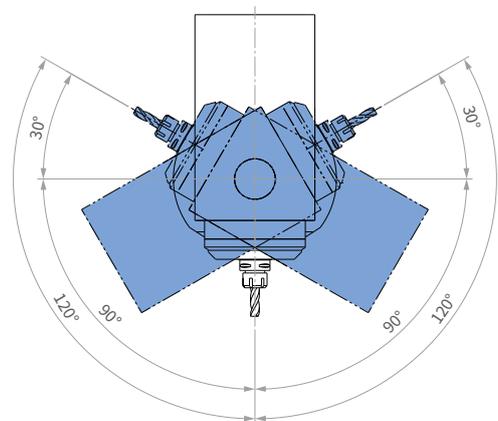


WORKING RANGE

SMX 2100L/LS


Unit : mm (inch)

SMX 2100L

ENTIRE RANGE

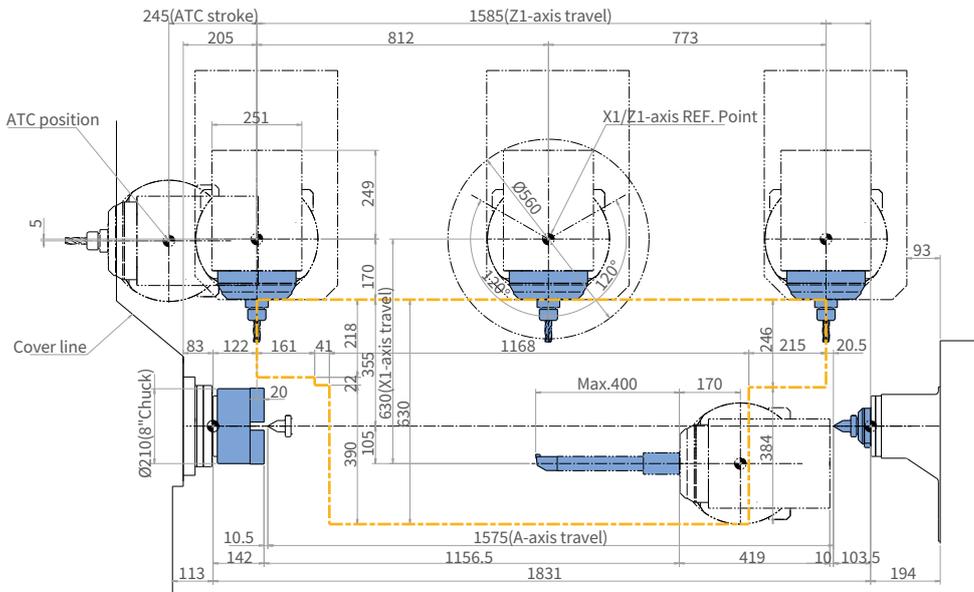


X1,Y-AXIS WORKING RAGE

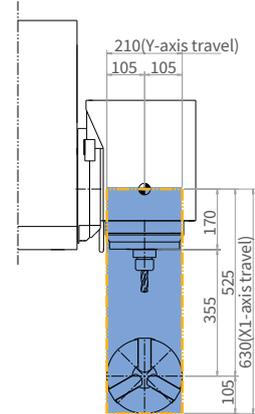


SMX 2100LS

ENTIRE RANGE

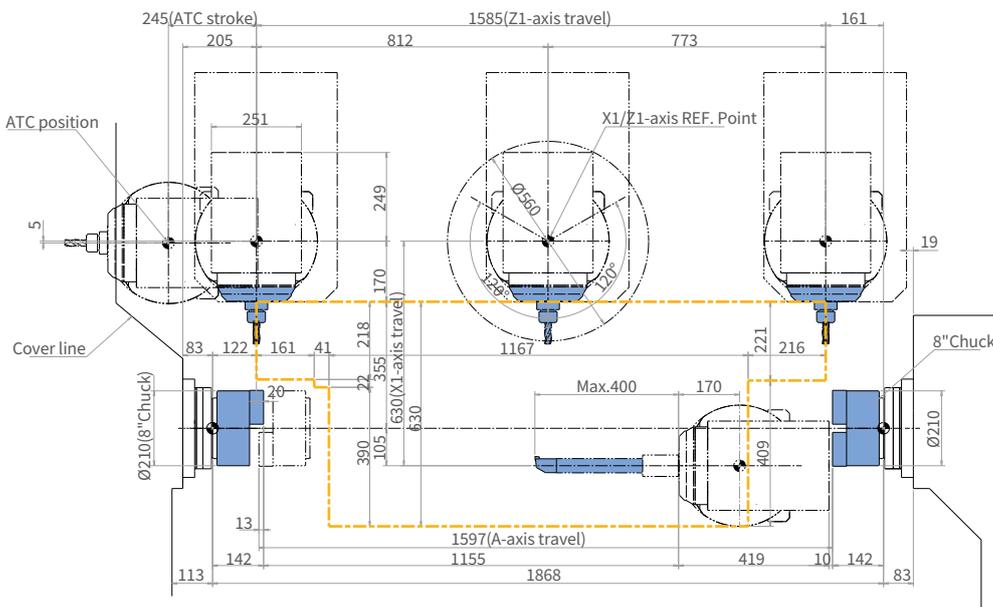

X1,Y-AXIS WORKING RAGE

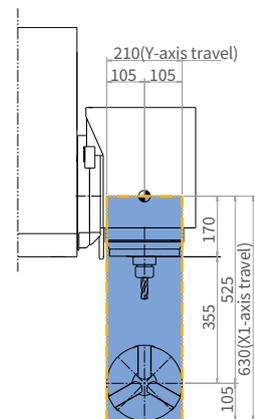


WORKING RANGE

SMX 2100LST · 3100B/835


Unit : mm (inch)

SMX 2100LST

ENTIRE RANGE

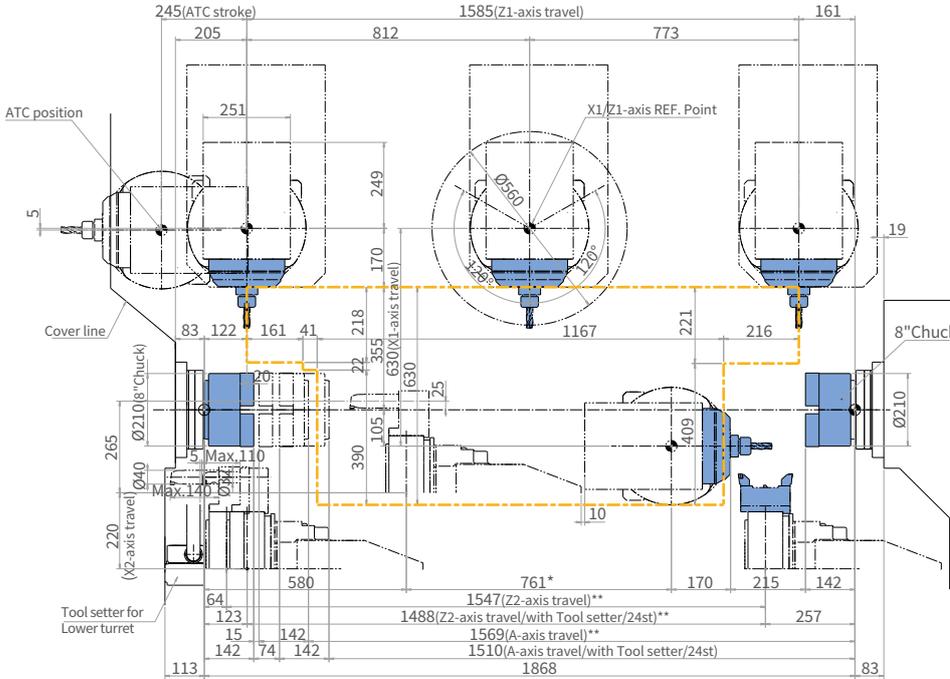

X1,Y,X2 AXIS WORKING RAGE

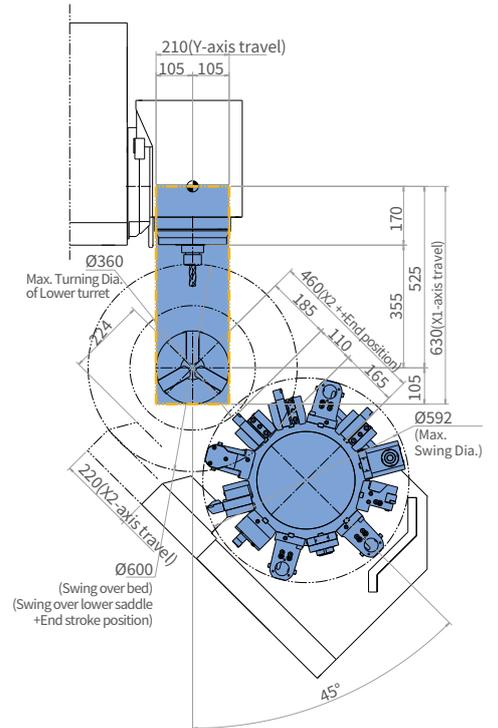


		Minimum distance between L/R chuck	Z2-axis Travel	A-axis Travel	Max. ID tool length
Without tool setter or With removable tool setter	12st**	37 (1.5)	1547 (60.9)	1569 (61.8)	140(Ø40)
	24st**	37 (1.5)	1547(60.9)	1569 (61.8)	110(Ø32)
Without tool setter	12st**	37 (1.5)	1547(60.9)	1569 (61.8)	140(Ø40)
	24st**	96 (3.8)	1488 (58.6)	1610 (63.4)	110(Ø32)


* Minium distance between milling spindle and lower turret when both units art located on the respective end point of minus stroke.

SMX 3100B/835

ENTIRE RANGE

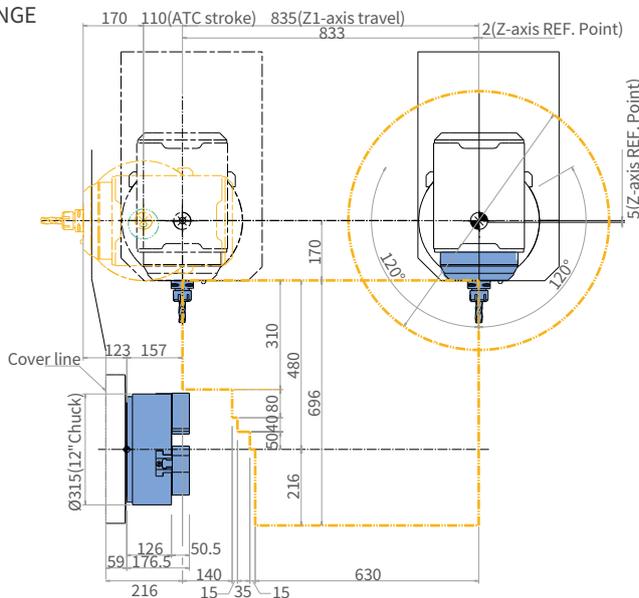

X1,Y-AXIS WORKING RAGE

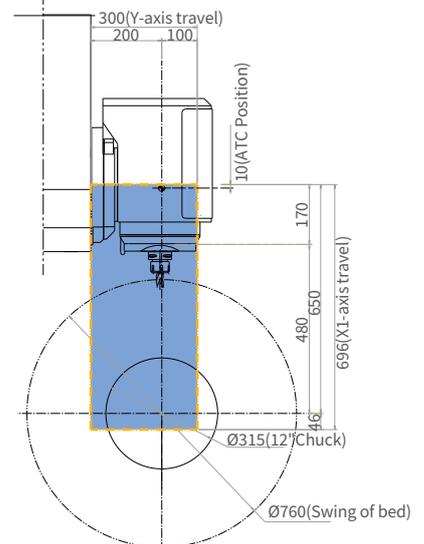


WORKING RANGE

SMX 2600 · 3100/L

Unit : mm (inch)


ENTIRE RANGE

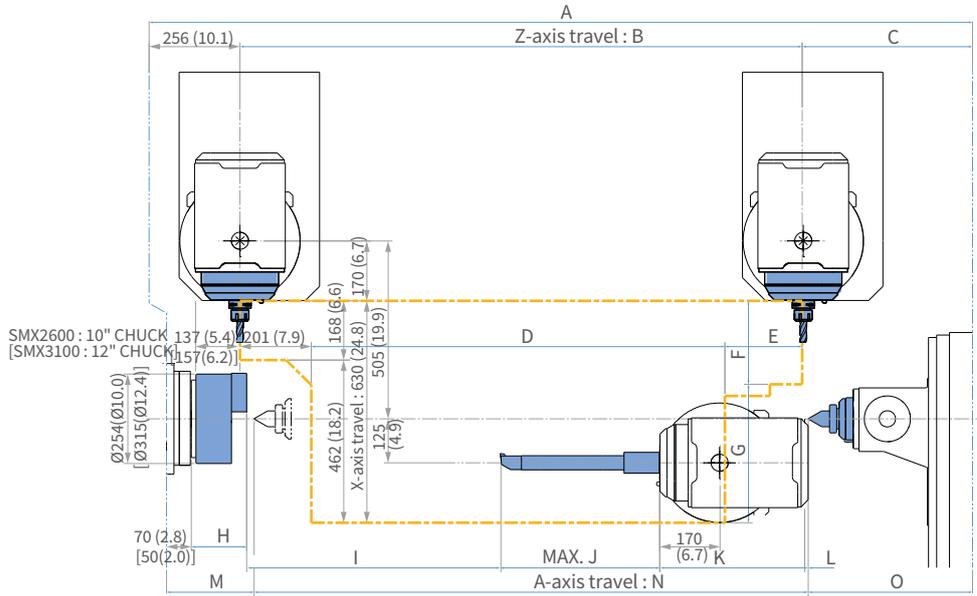


Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
SMX 2600	2321 (91.4)	1585 (62.4)	480 (18.9)	1166 (45.9)	218 (8.6)	237 (9.3)	345 (13.6)	156 (6.1)	697 (27.4)	450 (17.7)	420 (16.5)	16 (0.6)	247 (9.7)	1866 (73.5)	463 (18.2)
SMX 3100								176 (6.93)							
SMX 3100L	3223 (126.9)	2585 (101.8)	382 (15)	2168 (85.4)	216 (8.5)	195 (7.7)	435 (17.1)	176 (6.93)	1705 (71.1)	450 (17.7)*	420 (16.5)	12 (0.5)	313 (12.3)	2500 (98.4)	361 (14.2)

* "I" and "J" can be different depends on an applied long tool.

X1,Y-AXIS WORKING RANGE

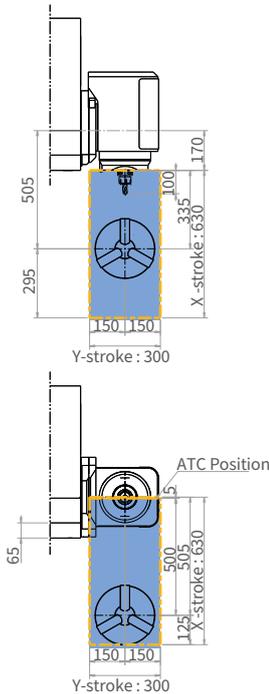

B-AXIS ROTATING RANGE

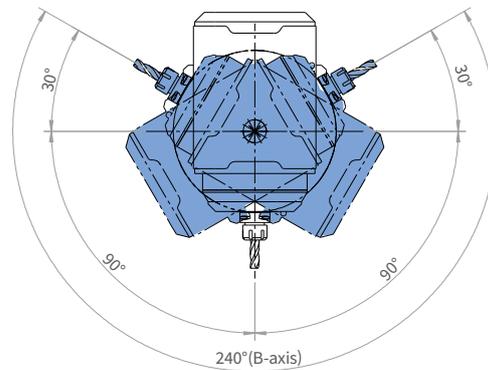


WORKING RANGE

SMX 2600S · 3100S/LS

Unit : mm (inch)


ENTIRE RANGE

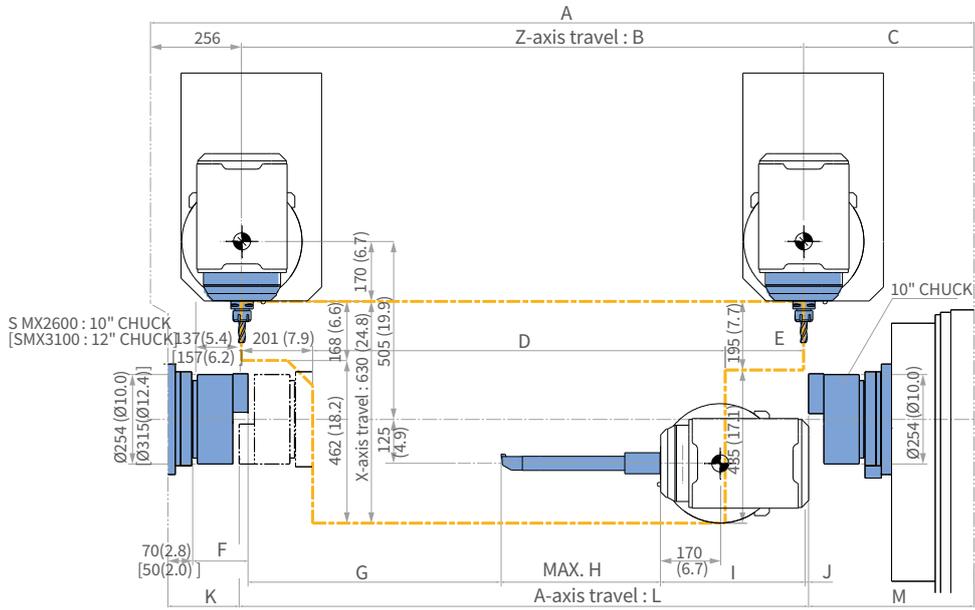


Model	A	B	C	D	E	F	G	H	I	J	K	L	M
SMX 2600S	2321 (91.4)	1585 (62.4)	480 (18.9)	1163 (45.8)	221 (8.7)	156 (6.1)	697 (27.4)	450 (17.7)	420 (16.5)	13 (0.5)	201 (7.9)	1605 (63.2)	466 (18.3)
SMX 3100S						176 (6.93)							
SMX 3100LS	3223 (126.9)	2585 (101.8)	382 (15)	2168 (85.4)	216 (8.5)	176 (6.93)	1705 (71.1)	450 (17.7)*	420 (16.5)	10 (0.4)	311 (12.2)	2500 (98.4)	363 (14.3)

* "G" and "H" can be different depends on an applied long tool.

X1,Y-AXIS WORKING RANGE

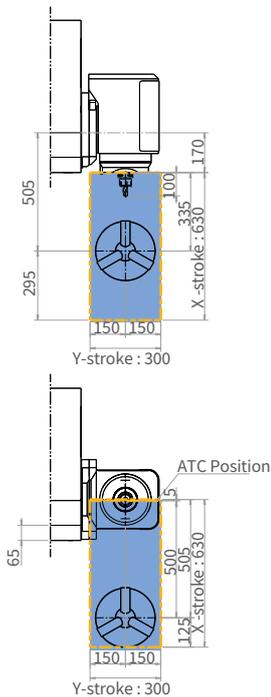

B-AXIS ROTATING RANGE

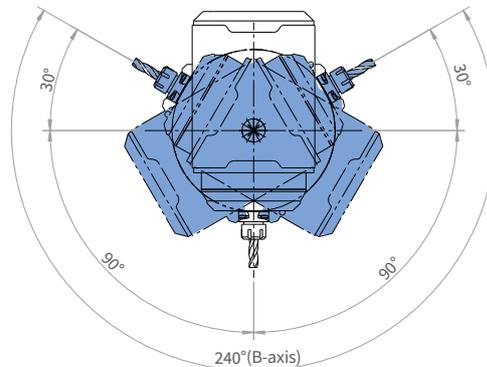


WORKING RANGE


SMX 2100ST/STB Lower turret

Unit : mm (inch)


ANGULAR MILLING HEAD

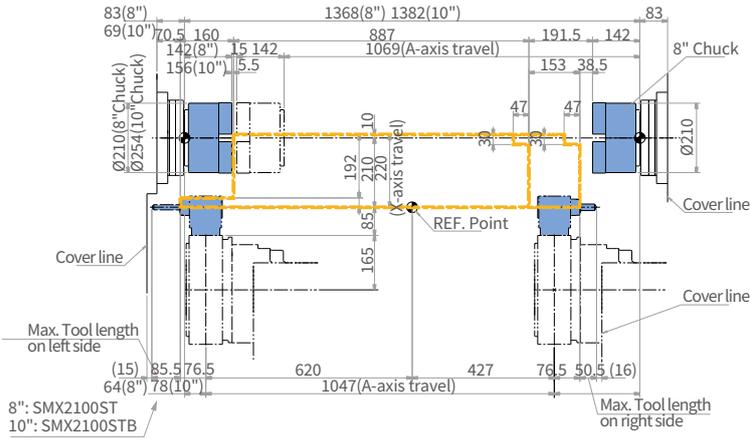


STRAIGHT MILLING HEAD

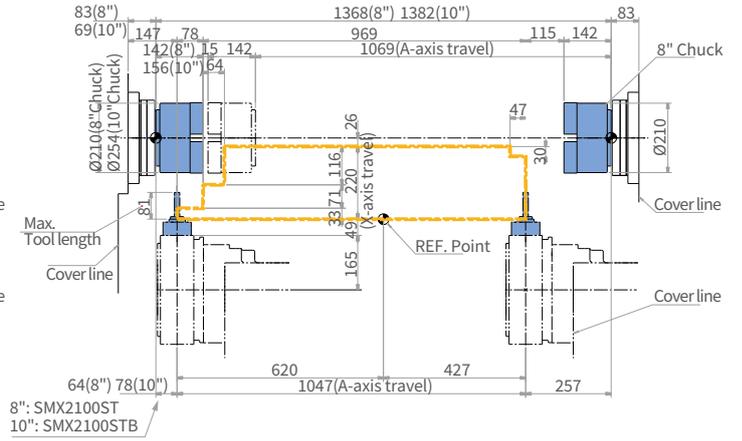

ID TOOL HOLDER

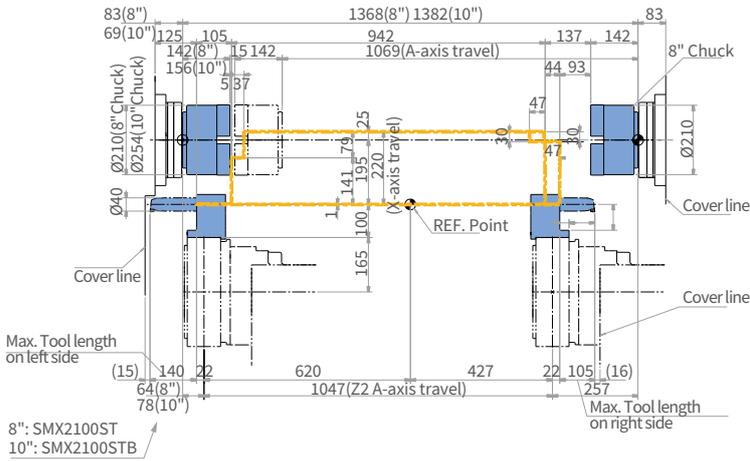

OD TOOL HOLDER

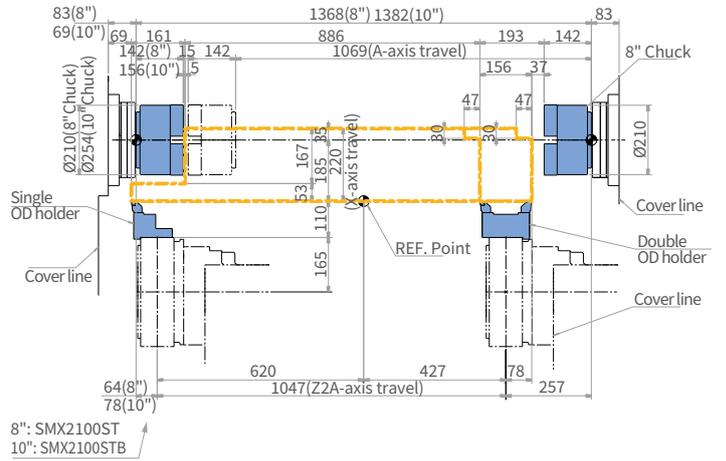


WORKING RANGE

SMX 2600ST · 3100ST Lower turret


Unit : mm (inch)

ANGULAR MILLING HEAD

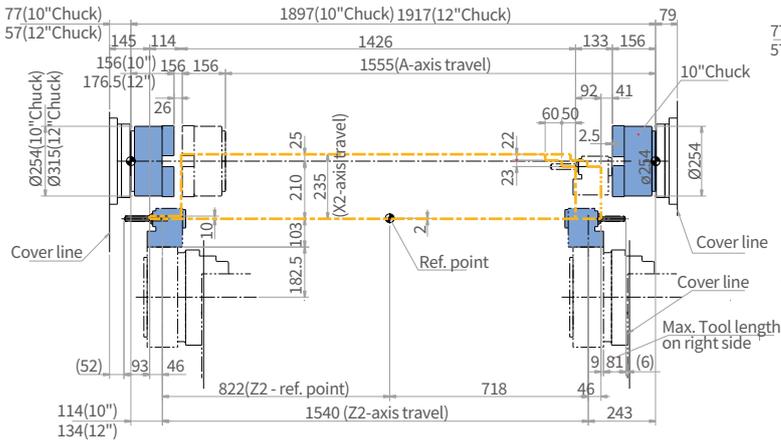


* Based on SMX 2600ST, SMX3100ST : 95mm (3.7inch)

STRAIGHT MILLING TOOL HOLDER

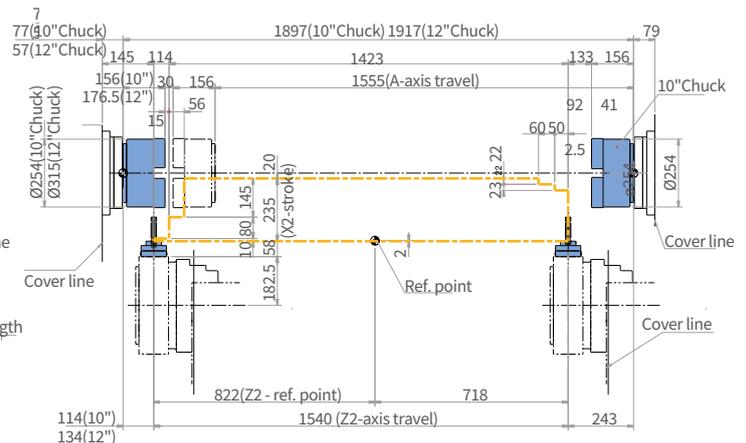


* Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)

ID TOOL HOLDER

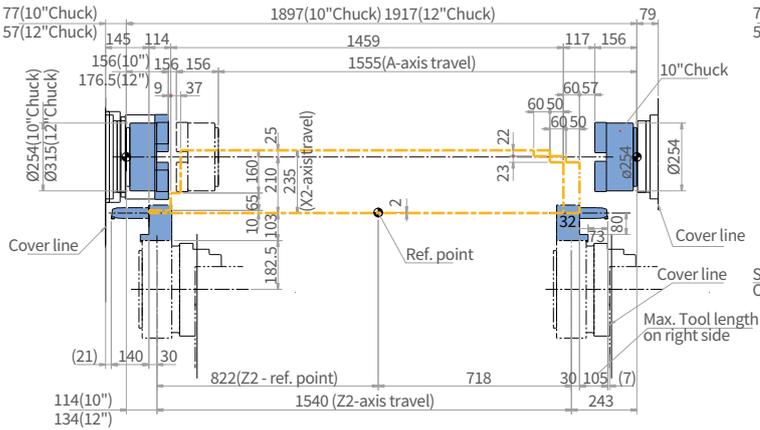

* Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)

OD TOOL HOLDER

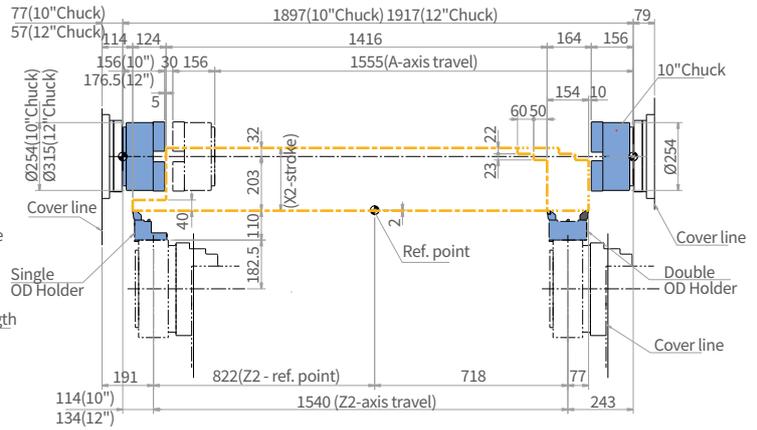

* Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)

	Unit	A	B	C	D	E
SMX 2600ST (10" chuck)	mm (inch)	ø254 (10.0)	156 (6.1)	1897 (74.7)	114 (4.5)	77 (3.0)
SMX 3100ST (12" chuck)	mm (inch)	ø315 (12.4)	176.5 (6.9)	1917 (75.5)	134 (5.3)	57 (2.2)

MACHINE SPECIFICATIONS

SMX 2100 series

Item	Unit	SMX 2100[L]	SMX 2100S[LS]	SMX 2100ST[LST]	SMX 2100B	SMX 2100SB	SMX 2100STB		
Capacity	Swing over bed	mm (inch)	600 (23.6)		255 (10.0)				
	Recom. turning diameter	mm (inch)	210 (8.3)		1040 (40.9)				
	Max. turning diameter *	mm (inch)	600 (23.6)		1040 (40.9)				
	Max. turning length	mm (inch)	1040(40.9) [1540(60.6)]		1040 (40.9)				
	Chuck size	Left spindle	inch	8 {10}		10 {12}			
		Right spindle	inch	-	8 {10}	-	8 {10}		
	Chuck work weight (include chuck)	kg (lb)	150 (330.7)		260 (573.2)				
	Shaft work weight (include chuck)	kg (lb)	300 (661.4)	-		520 (1146.4)	-		
Travels	Bar working diameter	mm (inch)	67 (2.6)		81 (3.2)				
	Travel distance	X-axis	mm (inch)	630(-105/+525) (24.8(-4.1/+20.7))					
		Y-axis	mm (inch)	210(±105) (8.3(±4.1))					
		Z-axis	mm (inch)	1085(42.7) [1585(62.4)]		1085 (42.7)			
		A-axis **	mm (inch)	-	1069 (42.1)		-	1047 (41.2)	
		B-axis	deg	240(±120)					
		C1-axis / C2-axis	deg	360 / -	360 / 360		360 / -	360 / 360	
	X2-axis / Z2-axis	mm (inch)	- / -		220 / 1047 (8.7 / 41.2) [1547 (60.9)]	- / -		220 / 1047 (8.7 / 41.2)	
	Rapid traverse rate	X-axis	m/min (ipm)	48 (1889.8)					
Y-axis		m/min (ipm)	36 (1417.3)						
Z-axis		m/min (ipm)	48 (1889.8)						
A-axis **		m/min (ipm)	-	30 (1181.1)		-	30 (1181.1)		
B-axis		r/min	40						
C1-axis / C2-axis		r/min	200 / -	200 / 200		200 / -	200 / 200		
X2-axis / Z2-axis		m/min (ipm)	- / -		24 / 36 (944.9 / 1417.3)	- / -		24 / 36 (944.9 / 1417.3)	
Left spindle	Max. spindle speed	r/min	5000		4000				
	Spindle motor power (S3 15%/S3 25%/30min/cont.)	kW (Hp)	22 / 22 / 18.5 / 15 (29.5 / 29.5 / 24.8 / 20.1)		22 / 22 / 18.5 / 15 (29.5 / 29.5 / 24.8 / 20.1)				
	Spindle nose	ASA	A2-6		A2-8				
	Spindle bearing diameter (Front)	mm (inch)	110 (4.3)		130 (5.1)				
	Spindle through hole	mm (inch)	76 (3.0)		91 (3.6)				
Min. spindle indexing angle (C1-axis)	deg	0.0001							
Right spindle	Max. spindle speed	r/min	-	5000		-	5000		
	Spindle motor power (S3 25%/cont.)	kW	-	22 / 22 / 18.5 / 15		-	22 / 22 / 18.5 / 15		
	Spindle nose	ASA	-	A2-6		-	A2-6		
	Spindle bearing diameter (Front)	mm	-	110 (4.3)		-	110 (4.3)		
	Spindle through hole	mm	-	76 (3.0)		-	76 (3.0)		
Min. spindle indexing angle (C2-axis)	deg	-	0.001{0.0001}		-	0.001{0.0001}			
Milling spindle	Max. spindle speed	r/min	12000 {20000 : F31i plus, F31i-5 plus, CUFOS}						
	Milling spindle motor power (S3 15%/S3 25%/30min/cont.)	kW	22 / 22 / 18.5 / 15 (29.5 / 29.5 / 24.8 / 20.1)						
	Min. spindle indexing angle (B-axis)	deg.	0.0001						
Automatic tool changer	Tool storage capa. (Max.)	ea	40 {80,120}		CAPTO C6				
	Tool shank	-	90 (3.5)						
	Max. tool diameter continuous	mm (inch)	130 (5.1)						
	Max. tool diameter without adjacent tools	mm (inch)	300 (11.8)						
	Max. tool length	mm (inch)	12 (26.5)						
	Max. tool weight	kg (lb)	9.8 (7.2)						
	Max. tool moment	N·m (ft·lbs)	1.8 (Fanuc) / 1.8 (SIEMENS)						
	Tool change time (T-T-T)	sec	7.8 (Fanuc) / 12.12 (SIEMENS)						
Lower turret	Tool-to-tool	sec	7.8 (Fanuc) / 12.12 (SIEMENS)						
	Chip-to-chip	sec	7.8 (Fanuc) / 12.12 (SIEMENS)						
	No. of tool stations	ea	-	12{24 position index}		-	12{24 position index}		
	OD tool size	mm (inch)	-	25 (1.0)		-	25 (1.0)		
	Max. boring bar size	mm (inch)	-	Ø40 (Ø1.6)		-	Ø40 (Ø1.6)		
Tail stock	Turret Indexing time (1 station swivel)	s	-	0.2		-	0.2		
	Max. rotary tool speed	r/min	-	{5000, 10000}		-	{5000, 10000}		
	Quill bore taper	MT	#4	-		#4	-		
Coolant Power source	Quill travel	mm (inch)	1075 (42.3) [1575 (62.0)]	-		1075 (42.3)	-		
	Coolant pump motor power	kW (Hp)	1.1						
Machine dimensions	Electric power supply (rated capacity)	kVA	55.65	73.81	80.19	52.36	70.52	76.9	
	Height	mm (inch)	2777 (109.3)						
	Length	mm (inch)	3950 (155.5) [4735(186.4)] (without coolant tank)			3950 (155.5) (without coolant tank)			
		mm (inch)	4845 (190.7) [5630 (221.7)] (with coolant tank)			4845 (190.7) (with coolant tank)			
	Width	mm (inch)	2770 (109.1)						
Weight	kg (lb)	14900 (32848.4)	15200 (33509.8)	15800 (34832.5)	15000 (33068.9)	15300 (33730.2)	15900 (35053.0)		
Control	NC system	FANUC 31i-B Plus{FANUC 31i-B5 Plus / SNUMERIK ONE / CUFOS}							

MACHINE SPECIFICATIONS

SMX 2600 series

Item		Unit	SMX 2600	SMX 2600S	SMX 2600ST	
Capacity	Swing over bed	mm (inch)	660 (26.0)		660 (26.0)	
	Recom. turning diameter	mm (inch)	255 (10.0)			
	Max. turning diameter *	mm (inch)	660 (26.0)		660 (26.0) [Lower turret : 405 (15.9)]	
	Max. turning length	mm (inch)	1540 (60.6)			
	Chuck size	Left spindle	inch	10 {12}		
		Right spindle	inch	-	10 {12}	
	Chuck work weight (include chuck)	kg (lb)	260 (573.2)		-	
	Shaft work weight (include chuck)	kg (lb)	520 (1146.4)		-	
Bar working diameter	mm (inch)	81 (3.2)				
Travels	Travel distance	X-axis	630 (-125/+505) (24.8 (-4.9/+19.9))		695(-125/+570) (27.4(-4.9/+22.4))	
		Y-axis	300 (±150) (11.8 (±5.9))			
		Z-axis	1585 (62.4)			
		A-axis **	1562 (61.5)	1605 (63.2)	1555 (61.2)	
		B-axis	240 (±120)			
		C1-axis / C2-axis	360 / 360			
	Rapid traverse rate	X2-axis / Z2-axis	mm (inch)	-	-	235 / 1540 (9.3 / 60.6)
		X-axis	m/min (ipm)	48 (1889.8)		
		Y-axis	m/min (ipm)	36 (1417.3)		
		Z-axis	m/min (ipm)	48 (1889.8)		
		A-axis **	m/min (ipm)	-	30 (1181.1)	
		B-axis	r/min	40		
	Left spindle	C1-axis / C2-axis	r/min	200 / 200		
		X2-axis / Z2-axis	m/min (ipm)	-	-	24 / 36 (944.9 / 1417.3)
Max. spindle speed		r/min	4000			
Spindle motor power (S3 25% / S2 30min / S1 Cont.)		kW (Hp)	30/26/22 (40.2/34./29.5)			
Spindle nose		ASA	A2-8			
Spindle bearing diameter (Front)		mm (inch)	130 (5.1)			
Right spindle	Spindle through hole	mm (inch)	91 (3.6)			
	Min. spindle indexing angle (C1-axis)	deg	0.0001			
	Max. spindle speed	r/min	-	4000		
	Spindle motor power (S3 25% / S2 30min / S1 Cont.)	kW (Hp)	-	30/26/22 (40.2/34./29.5)		
	Spindle nose	ASA	-	A2-8		
	Spindle bearing diameter (Front)	mm (inch)	-	130 (5.1)		
Milling spindle	Spindle through hole	mm (inch)	-	91 (3.6)		
	Min. spindle indexing angle (C2-axis)	deg	-	0.001		
	Max. spindle speed	r/min	12000			
	Milling spindle motor power (S6 25% / S2 30min / S1 Cont.)	kW (Hp)	22/18.5/15 (29.5/24.8/20.1)			
Automatic tool changer	Min. spindle indexing angle (B-axis)	deg	0.0001			
	Tool storage capa. (Max.)	ea	40 {80/120}			
	Tool shank	-	CAPTO C6 {HSK-T63}			
	Max. tool diameter continuous	mm (inch)	90 (3.5)			
	Max. tool diameter without adjacent tools	mm (inch)	130 (5.1)			
	Max. tool length	mm (inch)	450 (17.7)			
	Max. tool weight	kg (lb)	12 (26.5)			
	Max. tool moment	N·m (ft·lbs)	9.8 (7.2)			
Lower turret	Tool change time (T-T-T)	Tool-to-tool	1.8 (Fanuc) / 1.8 (SIEMENS)			
		Chip-to-chip	7.8 (Fanuc) / 12.12 (SIEMENS)			
	No. of tool stations	ea	-		12	
	OD tool size	mm (inch)	-		25 (1.0)	
	Max. boring bar size	mm (inch)	-		40 (1.6)	
	Turret Indexing time (1 station swivel)	s	-		0.2	
	Max. rotary tool speed	r/min	-		5000	
Long tool magazine	Tool storage capacity (Max.)	ea	-		-	
	Max. tool size	mm (inch)	-		-	
	Max. tool weight	kg (lb)	-		-	
Tail stock	Quill bore taper	MT	#5		-	
	Quill travel	mm (inch)	1562 (61.5)	-	-	
Coolant	Coolant pump motor power	kW (Hp)	2.2 (3.0)			
Power source	Electric power supply (rated capacity)	kVA	63.38	92.84	98.93	
	Height	mm (inch)	2750 (108.3)	2750 (108.3)	2820 (111.0)	
Machine dimensions	Length	mm (inch)	4900 (192.9)(without coolant tank), 5700 (224.4) (with coolant tank)		4900 (192.9)(without coolant tank), 5780(227.6) (with coolant tank)	
		mm (inch)	3011 (118.5)	3011 (118.5)		
	Weight	kg (lb)	15800 (34832.5)	16200 (35714.4)	18000 (39682.6)	
Control	NC system	FANUC 31i-B Plus [FANUC 31i-B5 Plus / SNUMERIK ONE / CUFOS]				

* When the Tool Setter option is applied, the maximum machining diameter may change. Prior technical consultation is strictly required.

** A-axis is travel of servo tail stock in SMX 2600 and travel of right spindle in SMX 2600S, 2600ST.

MACHINE SPECIFICATIONS

SMX 3100 series

	Item	Unit	SMX 3100	SMX 3100S	SMX 3100ST	SMX 3100L	SMX 3100LS	SMX 3100B/835		
Capacity	Swing over bed	mm (inch)	660 (26.0)					760 (29.9)		
	Recom. turning diameter	mm (inch)	315 (12.4)							
	Max. turning diameter *	mm (inch)	660 (26.0)		660 (26.0) [Lower turret : 405 (15.9)]	660 (26.0)		760 (29.9)		
	Max. turning length	mm (inch)	1540 (60.6)	1540 (60.6)		2540 (100.0)		790 (31.1)		
	Chuck size	Left spindle Right spindle	inch	12 {15}						
	Chuck work weight (include chuck)	kg (lb)	500 (1102.3)					500 (1102.3)		
	Shaft work weight (include chuck)	kg (lb)	1000 (2204.6)			1000 (2204.6)				
Travels	Bar working diameter	mm (inch)	102 (4.0)							
	Travel distance	X-axis	mm (inch)	630 (-125/+505) (24.8 (-4.9/+19.9))		695(-125/+570) (27.4(-4.9/+22.4))		630 (-125/+505) (24.8 (-4.9/+19.9))		
		Y-axis	mm (inch)	300 (±150) (11.8 (±5.9))					696(-46/+650) (27.4(-1.8/+25.6))	
		Z-axis	mm (inch)	1585 (62.4)					300 (11.8)	
		A-axis **	mm (inch)	1562 (61.5)	1605 (63.2)	1540 (60.6)		2585 (101.8)		
		B-axis	deg	240 (±120)					835 (32.9)	
	X2-axis / Z2-axis	C1-axis / C2-axis	deg	360 / 360						
		X2-axis / Z2-axis	mm (inch)			235 / 1540 (9.3 / 60.6)				
	Rapid traverse rate	X-axis	m/min (ipm)	48 (1889.8)						
		Y-axis	m/min (ipm)	36 (1417.3)						
		Z-axis	m/min (ipm)	48 (1889.8)	48 (1889.8)		30 (1181.1)	30 (1181.1)	48 (1889.8)	
		A-axis **	m/min (ipm)			30 (1181.1)		20 (787.4)		
		B-axis	r/min	40						
X2-axis / Z2-axis	C1-axis / C2-axis	r/min	200 / 200							
	X2-axis / Z2-axis	m/min (ipm)			24 / 36 (944.9 / 1417.3)					
Left spindle	Max. spindle speed	r/min	3000					2400		
	Spindle motor power (S2 30min/S1 Cont.)	kW (Hp)	30/25 (40.2/33.5)							
	Spindle nose	ASA	A2-11							
	Spindle bearing diameter (Front)	mm (inch)	160 (6.3)					180 (7.1)		
	Spindle through hole	mm (inch)	115 (4.5)					120 (4.7)		
	Min. spindle indexing angle (C1-axis)	deg	0.0001							
Right spindle	Max. spindle speed	r/min	4000							
	Spindle motor power (S3 25% / S2 30min / S1 Cont.)	kW (Hp)	30/26/22 (40.2/34./29.5)							
	Spindle nose	ASA	A2-8							
	Spindle bearing diameter (Front)	mm (inch)	130 (5.1)							
	Spindle through hole	mm (inch)	91 (3.6)							
	Min. spindle indexing angle (C2-axis)	deg	0.001							
Milling spindle	Max. spindle speed	r/min	12000							
	Milling spindle motor power (S6 25% / S2 30min / S1 Cont.)	kW (Hp)	22/18.5/15 (29.5/24.8/20.1)							
	Min. spindle indexing angle (B-axis)	deg	0.001							
Automatic tool changer	Tool storage capa. (Max.)	ea	40 {80/120}							
	Tool shank	-	CAPTO C6 {HSK-T63}							
	Max. tool diameter continous	mm (inch)	90 (3.5)							
	Max. tool diameter without adjacent tools	mm (inch)	130 (5.1)							
	Max. tool length	mm (inch)	450 (17.7)					300 (11.8)		
	Max. tool weight	kg (lb)	12 (26.5)							
	Max. tool moment	N·m (ft·lbs)	9.8 (7.2)							
	Tool change time (T-T-T)	sec	1.8 (FANUC)							
Lower turret	Tool-to-tool Chip-to-chip	sec	7.8 (FANUC)							
	No. of tool stations	ea	-		12	-		-		
	OD tool size	mm (inch)	-		25 (1.0)	-		-		
	Max. boring bar size	mm (inch)	-		40 (1.6)	-		-		
	Turret Indexing time (1 station swivel)	s	-		0.2	-		-		
Long tool magazine (option for SMX 3100L/LS)	Max. rotary tool speed	r/min	-		5000	-		-		
	Tool storage capacity (Max.)	ea	-		-	{3}	{3}	-		
	Max. tool size	mm (inch)	-		-	{Ø60 x L600 or Ø30 x L800 (Ø2.4 x L23.6 or Ø1.2 x L31.5)}	{Ø60 x L600 or Ø30 x L800 (Ø2.4 x L23.6 or Ø1.2 x L31.5)*}	-		
	Max. tool weight	kg (lb)	-		-	{15}	{15}*}	-		
Tail Stock	Quill bore taper	MT	#5							
	Quill travel	mm (inch)	1562 (61.5)	-		2500 (98.4)		-		
Coolant Power source	Coolant pump motor power	kW (Hp)	2.2 (3.0)					1.1		
	Electric power supply (rated capacity)	kVA	70.08	99.44	99.46	69.80	99.72	60.44		
Machine dimensions	Height	mm (inch)	2750 (108.3)	2850 (112.2)	2820 (111.0)	2850 (112.2)	2850 (112.2)	2890 (113.8)		
	Length	mm (inch)	4900 (192.9) (without coolant tank), 5700 (224.4) (with coolant tank)	4900 (192.9) (without coolant tank), 5700 (224.4) (with coolant tank)	4900 (192.9) (without coolant tank), 5780(227.6) (with coolant tank)	6400 (252.0) (without coolant tank), 7200(283.5) (with coolant tank)	6400 (252.0) (without coolant tank), 7200(283.5) (with coolant tank)	4665 (183.7)		
	Width	mm (inch)	3011 (118.5)	3011 (118.5)	3021 (118.9)	3011 (118.5)	3011 (118.5)	2920 (115.0)		
	Weight	kg (lb)	16300 (35934.8)	16700 (36816.7)	18500 (40784.9)	20100 (44312.3)	20500 (45194.1)	14960 (32980.7)		
	Control	NC system	FANUC 31i-B Plus {FANUC 31i-B5 Plus / SNUMERIK ONE / CUFOS}							

RESPONDING TO CUSTOMERS **ANYTIME, ANYWHERE**

DN SOLUTIONS GLOBAL NETWORK

66 COUNTRIES | **140** + SALES NETWORKS | **3** FACTORIES | **6** REGIONAL HQS



CUSTOMER SUPPORT AND SERVICES

WE'RE THERE FOR YOU WHENEVER YOU NEED US.

We help our customers operate at maximum efficiency by providing them with a range of tried, tested and trusted services - from pre-sales consultancy to post-sales support.



FIELD SERVICES

- On-site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair service



PARTS SUPPLY

- Supplying a wide range of original DN Solutions spare parts
- Parts repair service



TRAINING

- Programming, machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering



TECHNICAL SUPPORT

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy



Head Office

19F, 10, Tongil-ro, Jung-gu Seoul,
Republic of Korea, 04527
Tel: +82-2-6972-0370/0350
Fax: +82-2-6972-0400

DN Solutions America

360 E State PKWY,
Schaumburg, IL. 60173,
United states
Tel: +1-973-618-2500
Fax: +1-973-618-2501

DN Solutions Europe

Emdener Strasse 24, D-41540
Dormagen, Germany
Tel: +49-2133-5067-100
Fax: +49-2133-5067-111

DN Solutions India

No.82, Jakkuar Village
Yelahanka Hobil,
Bangalore-560064
Tel: + 91-80-2205-6900
E-mail: india@dncompany.com

DN Solutions China

Room 101,201,301, Building 39 Xinzhuan Highway
No.258 Songjiang District China Shanghai (201612)
Tel: +86 21-5445-1155
Fax: +86 21-6405-1472

DN Solutions Vietnam

M.O.R.E building 2F, 40A-40B Ut Tich Street, 04 Ward 04,
District Tan Binh District, Ho Chi Minh City, Vietnam
Tel: +84 28-7304-0163

Sales inquiry

sales@dncompany.com